




# OIL ANALYSIS REPORT

Sample Rating Trend

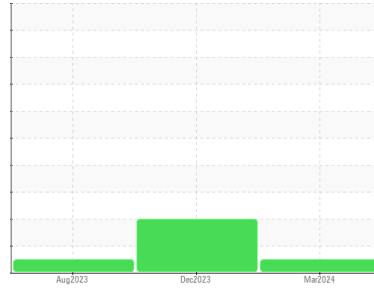

**NORMAL**



Machine Id  
**PETERBILT 433000**

Component  
**Natural Gas Engine**  
Fluid  
**{not provided} (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0087484</b>	GFL0087499	GFL0087532
Sample Date	Client Info		<b>06 Mar 2024</b>	18 Dec 2023	07 Aug 2023
Machine Age	hrs	Client Info	<b>319</b>	220	55
Oil Age	hrs	Client Info	<b>99</b>	220	55
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>6</b>	51	25
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	2	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >9	<b>2</b>	▲ 21	8
Lead	ppm	ASTM D5185m >30	<b>0</b>	2	1
Copper	ppm	ASTM D5185m >35	<b>&lt;1</b>	9	7
Tin	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>51</b>	30	43
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>48</b>	51	49
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	4	4
Magnesium	ppm	ASTM D5185m	<b>762</b>	731	773
Calcium	ppm	ASTM D5185m	<b>1234</b>	1099	1164
Phosphorus	ppm	ASTM D5185m	<b>703</b>	715	700
Zinc	ppm	ASTM D5185m	<b>872</b>	836	854
Sulfur	ppm	ASTM D5185m	<b>2434</b>	2536	2640

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>8</b>	96	92
Sodium	ppm	ASTM D5185m	<b>4</b>	6	5
Potassium	ppm	ASTM D5185m >20	<b>4</b>	▲ 85	40

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.2</b>	9.6	7.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.0</b>	20.0	18.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.1</b>	17.4	16.1
Base Number (BN)	mg KOH/g	ASTM D2896	<b>9.3</b>	7.5	8.8







# OIL ANALYSIS REPORT

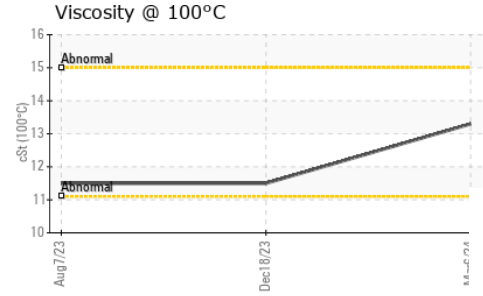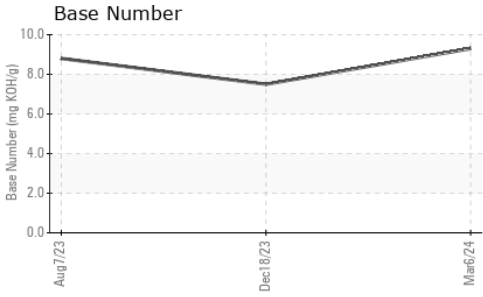

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>13.3</b>	11.5	11.5

## GRAPHS

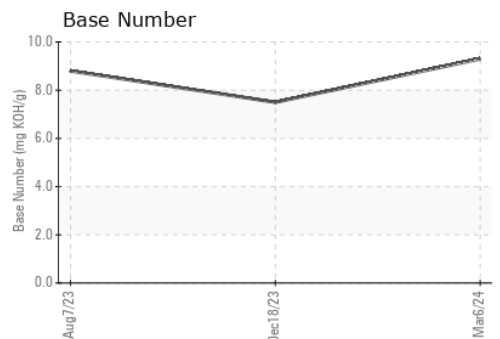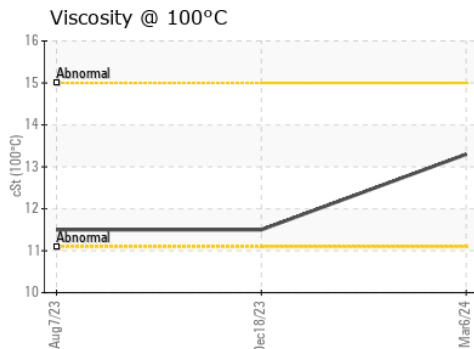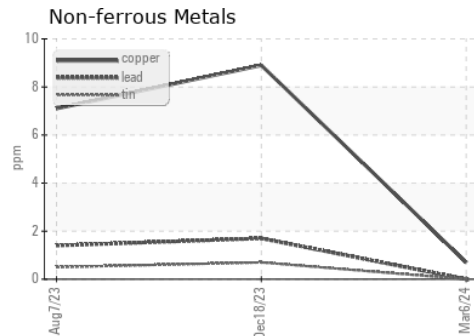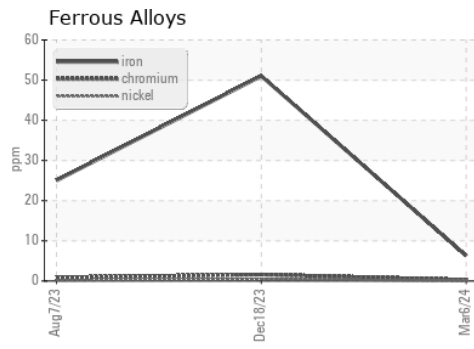

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0087484      **Received** : 07 Mar 2024  
**Lab Number** : 06111846      **Tested** : 08 Mar 2024  
**Unique Number** : 10915343      **Diagnosed** : 08 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 331 - Columbus**  
 180 Ada Moore Rd  
 Columbus, NC  
 US 28722  
 Contact: Matt Segars  
 matt.segars@gflenv.com  
 T: (800)207-6618  
 F: (252)617-2494

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)