




OIL ANALYSIS REPORT

Sample Rating Trend

DEGRADATION

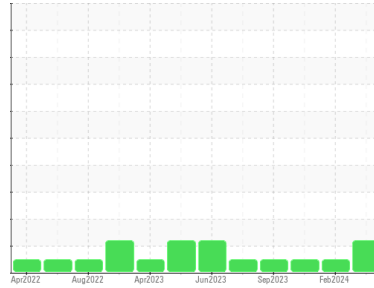

Machine Id
MACK 732000
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

The oil is near the end of its useful service life, recommend schedule an oil change. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN level is low. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0087481	GFL0109584	GFL0087502
Sample Date	Client Info	06 Mar 2024	07 Feb 2024	30 Nov 2023
Machine Age	hrs	5512	5241	4696
Oil Age	hrs	816	545	1174
Oil Changed	Client Info	Not Chngd	Not Chngd	Changed
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	10	8	11
Chromium	ppm ASTM D5185m >5	<1	<1	1
Nickel	ppm ASTM D5185m >4	0	<1	<1
Titanium	ppm ASTM D5185m >2	0	<1	<1
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >15	2	2	3
Lead	ppm ASTM D5185m >25	<1	1	3
Copper	ppm ASTM D5185m >100	1	1	2
Tin	ppm ASTM D5185m >4	<1	<1	<1
Vanadium	ppm ASTM D5185m	<1	0	<1
Cadmium	ppm ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	7	7	8
Barium	ppm ASTM D5185m 0	0	<1	<1
Molybdenum	ppm ASTM D5185m 60	60	54	65
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 1010	596	546	585
Calcium	ppm ASTM D5185m 1070	1769	1543	1768
Phosphorus	ppm ASTM D5185m 1150	731	695	765
Zinc	ppm ASTM D5185m 1270	996	974	970
Sulfur	ppm ASTM D5185m 2060	2462	2484	2327

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	3	3	4
Sodium	ppm ASTM D5185m	8	3	11
Potassium	ppm ASTM D5185m >20	<1	4	0

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	0	0	0
Nitration	Abs/cm *ASTM D7624 >20	11.7	11.6	12.6
Sulfation	Abs/.1mm *ASTM D7415 >30	24.4	22.2	26.9

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	20.2	19.0	22.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	▲ 3.9	4.3	3.8







OIL ANALYSIS REPORT

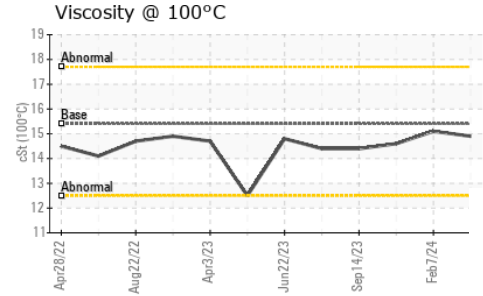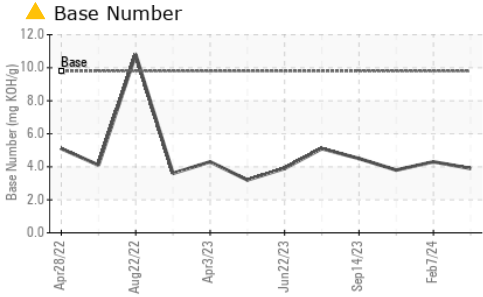

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	14.9	15.1	14.6

GRAPHS

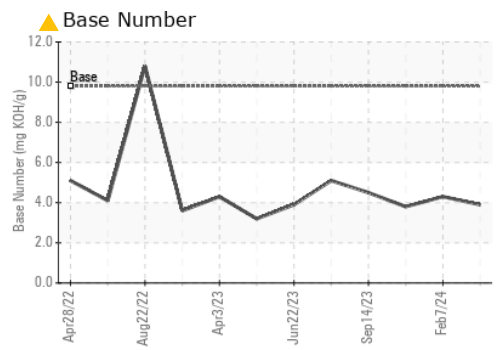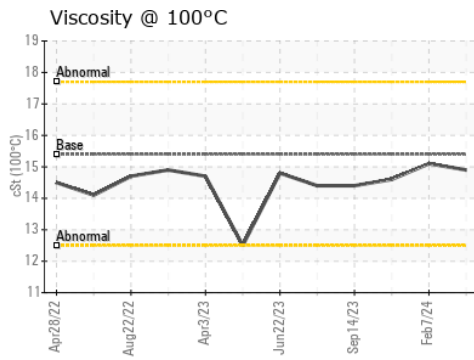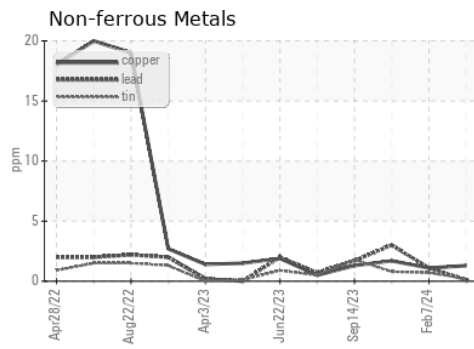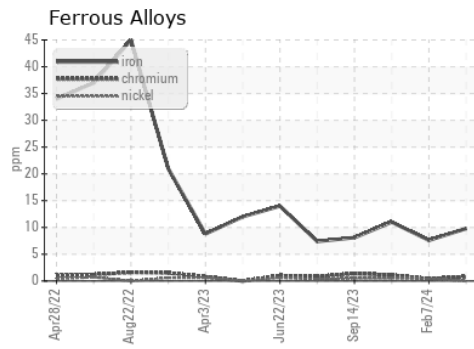

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0087481 **Received** : 07 Mar 2024
Lab Number : 06111851 **Tested** : 08 Mar 2024
Unique Number : 10915348 **Diagnosed** : 10 Mar 2024 - Don Baldrige
Test Package : FLEET

GFL Environmental - 331 - Columbus
 180 Ada Moore Rd
 Columbus, NC
 US 28722
 Contact: Matt Segars
 matt.segars@gflenv.com
 T: (800)207-6618
 F: (252)617-2494

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)