




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
(MR3003)
Machine Id
FREIGHTLINER 10545C
Component
Natural Gas Engine
Fluid
PETRO CANADA DURON GEO LD 15W40 (9 GAL)

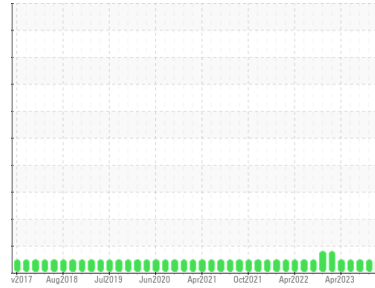

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0109660	GFL0087455	GFL0087523
Sample Date	Client Info		06 Mar 2024	03 Jan 2024	10 Oct 2023
Machine Age	hrs	Client Info	23479	22929	22929
Oil Age	hrs	Client Info	1098	548	1054
Oil Changed	Client Info		Not Chngd	Not Chngd	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	23	15	24
Chromium	ppm	ASTM D5185m >4	2	2	2
Nickel	ppm	ASTM D5185m >2	<1	<1	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >9	7	6	5
Lead	ppm	ASTM D5185m >30	<1	<1	4
Copper	ppm	ASTM D5185m >35	<1	<1	<1
Tin	ppm	ASTM D5185m >4	<1	<1	0
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	16	14	10
Barium	ppm	ASTM D5185m 5	0	0	0
Molybdenum	ppm	ASTM D5185m 50	59	55	65
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 560	628	592	628
Calcium	ppm	ASTM D5185m 1510	1765	1637	1742
Phosphorus	ppm	ASTM D5185m 780	855	745	826
Zinc	ppm	ASTM D5185m 870	1025	1030	1121
Sulfur	ppm	ASTM D5185m 2040	2523	2486	2566

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	7	3	4
Sodium	ppm	ASTM D5185m	9	7	12
Potassium	ppm	ASTM D5185m >20	0	<1	<1

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0.1	0	0
Nitration	Abs/cm	*ASTM D7624 >20	13.1	11.7	12.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.0	22.5	24.5

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.3	18.7	20.6
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	7.9	4.5	3.8







OIL ANALYSIS REPORT

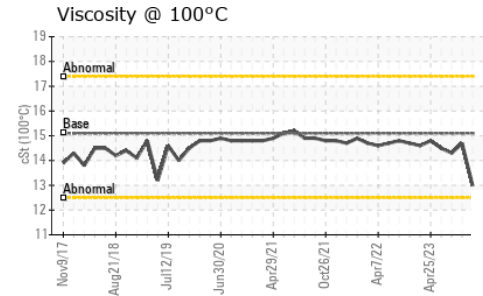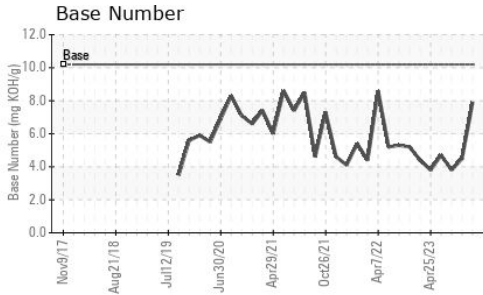

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	12.98	14.7	14.3

GRAPHS

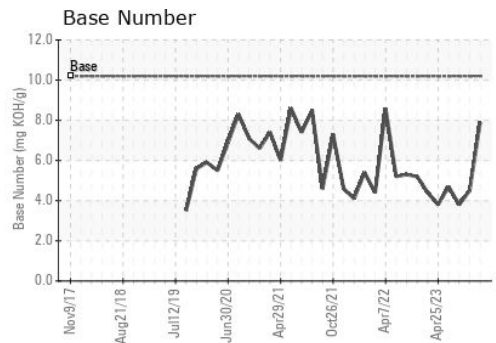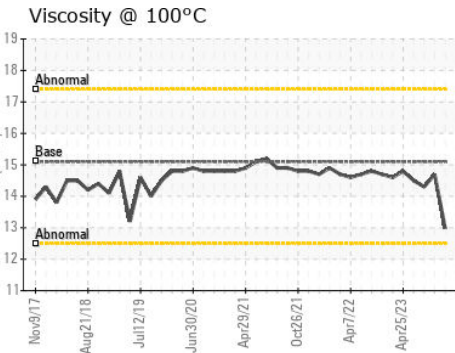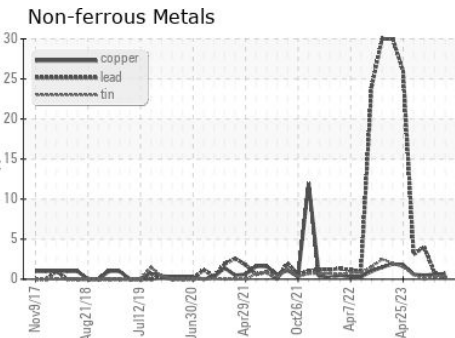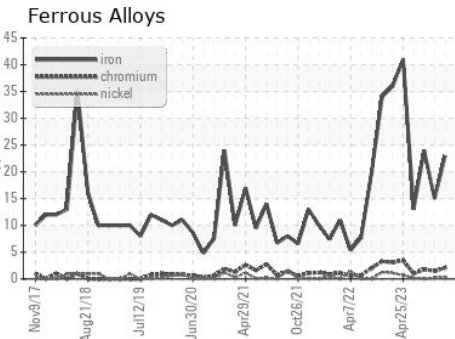

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0109660
Lab Number : **06111853**
Unique Number : 10915350
Test Package : FLEET

Received : 07 Mar 2024
Tested : 13 Mar 2024
Diagnosed : 13 Mar 2024 - Jonathan Hester

GFL Environmental - 331 - Columbus
 180 Ada Moore Rd
 Columbus, NC
 US 28722

Contact: Matt Segars
 matt.segars@gflenv.com
 T: (800)207-6618
 F: (252)617-2494

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)