




# OIL ANALYSIS REPORT

Sample Rating Trend

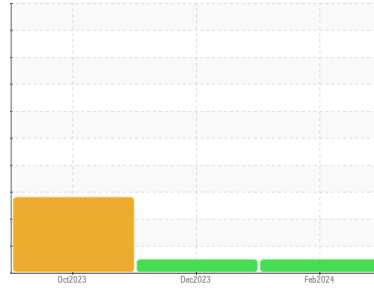

**NORMAL**



Area  
**(TB6648)**  
 Machine Id  
**920012**

Component  
**Diesel Engine**  
 Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0113030</b>	GFL0059655	GFL0059652
Sample Date	Client Info		<b>22 Feb 2024</b>	01 Dec 2023	02 Oct 2023
Machine Age	hrs	Client Info	<b>10727</b>	9819	9819
Oil Age	hrs	Client Info	<b>9819</b>	9819	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	SEVERE

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	0.3	▲ 11.5
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>9</b>	8	52
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	3	9
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>2</b>	<1	4
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>9</b>	4	14
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>66</b>	63	61
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	1
Magnesium	ppm	ASTM D5185m 1010	<b>939</b>	941	770
Calcium	ppm	ASTM D5185m 1070	<b>1112</b>	1141	1022
Phosphorus	ppm	ASTM D5185m 1150	<b>957</b>	1062	959
Zinc	ppm	ASTM D5185m 1270	<b>1182</b>	1275	1039
Sulfur	ppm	ASTM D5185m 2060	<b>2966</b>	3012	4953

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	3	13
Sodium	ppm	ASTM D5185m	<b>2</b>	2	17
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	38

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.5	1
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.2</b>	9.7	13.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.0</b>	20.0	33.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.8</b>	16.5	33.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.4</b>	7.1	7.4







# OIL ANALYSIS REPORT

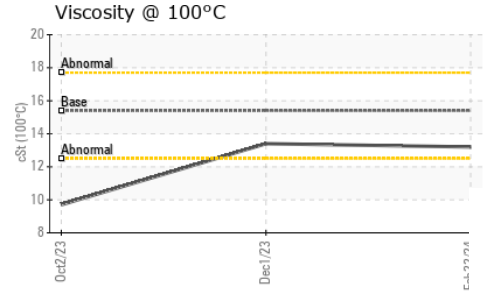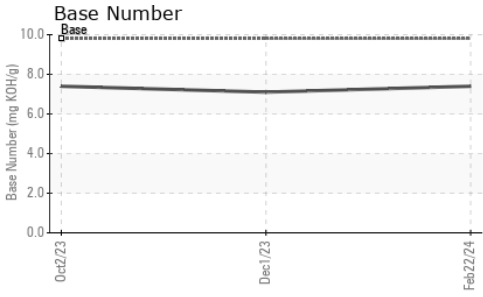

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	13.4 ▲ 9.7

## GRAPHS

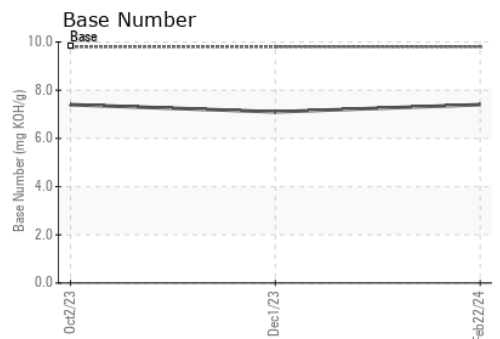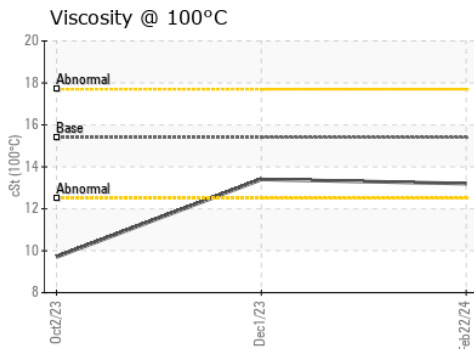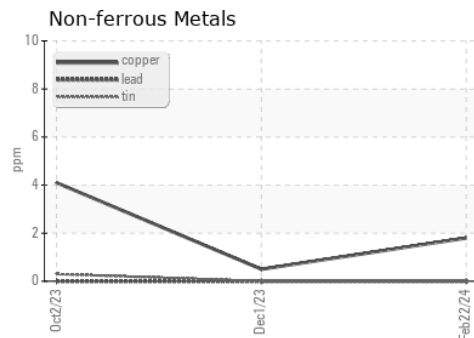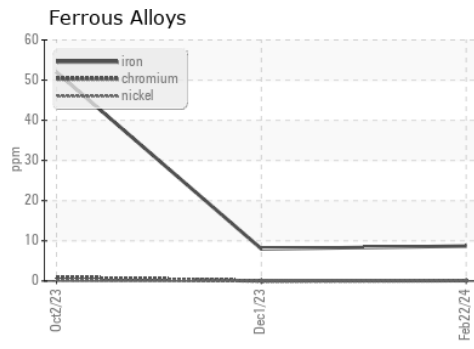

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0113030 **Received** : 07 Mar 2024  
**Lab Number** : 06111894 **Tested** : 08 Mar 2024  
**Unique Number** : 10915391 **Diagnosed** : 08 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 924 - Madison HC**  
 300 Raemisch Road  
 Waunakee, WI  
 US 53597  
 Contact: Ben Briggs  
 ben.briggs@gflenv.com  
 T: (608)770-9196  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)