




# OIL ANALYSIS REPORT

Sample Rating Trend

DEGRADATION

Area  
**(TB6606)**  
Machine Id  
**412070**

Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

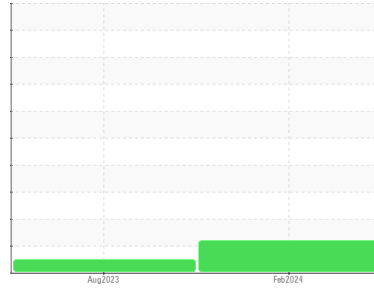

## DIAGNOSIS

### Recommendation

The oil is near the end of its useful service life, recommend schedule an oil change. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN level is low. The condition of the oil is acceptable for the time in service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|----------|
| Sample Number      | Client Info |             |            | <b>GFL0113039</b>  | GFL0059618  | ---      |
| Sample Date        | Client Info |             |            | <b>22 Feb 2024</b> | 14 Aug 2023 | ---      |
| Machine Age        | hrs         | Client Info |            | <b>4261</b>        | 0           | ---      |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 0           | ---      |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | N/A         | ---      |
| Sample Status      |             |             |            | <b>ABNORMAL</b>    | NORMAL      | ---      |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method | >3.0   |            | <b>&lt;1.0</b> | <1.0     | ---      |
| Water         | WC Method | >0.2   |            | <b>NEG</b>     | NEG      | ---      |
| Glycol        | WC Method |        |            | <b>NEG</b>     | NEG      | ---      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >165       | <b>38</b>    | 28       | ---      |
| Chromium    | ppm | ASTM D5185m | >5         | <b>1</b>     | 1        | ---      |
| Nickel      | ppm | ASTM D5185m | >4         | <b>0</b>     | 0        | ---      |
| Titanium    | ppm | ASTM D5185m | >2         | <b>0</b>     | 0        | ---      |
| Silver      | ppm | ASTM D5185m | >2         | <b>0</b>     | 0        | ---      |
| Aluminum    | ppm | ASTM D5185m | >20        | <b>6</b>     | 7        | ---      |
| Lead        | ppm | ASTM D5185m | >150       | <b>&lt;1</b> | 2        | ---      |
| Copper      | ppm | ASTM D5185m | >90        | <b>2</b>     | 2        | ---      |
| Tin         | ppm | ASTM D5185m | >5         | <b>&lt;1</b> | <1       | ---      |
| Vanadium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | 0        | ---      |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | ---      |

| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m | 250        | <b>5</b>     | 14       | ---      |
| Barium     | ppm | ASTM D5185m | 10         | <b>0</b>     | 0        | ---      |
| Molybdenum | ppm | ASTM D5185m | 100        | <b>58</b>    | 62       | ---      |
| Manganese  | ppm | ASTM D5185m |            | <b>&lt;1</b> | <1       | ---      |
| Magnesium  | ppm | ASTM D5185m | 450        | <b>828</b>   | 999      | ---      |
| Calcium    | ppm | ASTM D5185m | 3000       | <b>979</b>   | 1183     | ---      |
| Phosphorus | ppm | ASTM D5185m | 1150       | <b>814</b>   | 987      | ---      |
| Zinc       | ppm | ASTM D5185m | 1350       | <b>1034</b>  | 1290     | ---      |
| Sulfur     | ppm | ASTM D5185m | 4250       | <b>2357</b>  | 3575     | ---      |



| CONTAMINANTS |     | method      | limit/base | current   | history1 | history2 |
|--------------|-----|-------------|------------|-----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >35        | <b>6</b>  | 10       | ---      |
| Sodium       | ppm | ASTM D5185m | >216       | <b>7</b>  | 5        | ---      |
| Potassium    | ppm | ASTM D5185m | >20        | <b>18</b> | 15       | ---      |

| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 | >7.5       | <b>0.6</b>  | 0.5      | ---      |
| Nitration | Abs/cm   | *ASTM D7624 | >20        | <b>12.6</b> | 9.5      | ---      |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30        | <b>27.9</b> | 21.6     | ---      |

| FLUID DEGRADATION |          | method      | limit/base | current      | history1 | history2 |
|-------------------|----------|-------------|------------|--------------|----------|----------|
| Oxidation         | Abs/.1mm | *ASTM D7414 | >25        | <b>31.8</b>  | 18.7     | ---      |
| Base Number (BN)  | mg KOH/g | ASTM D2896  | 8.5        | <b>▲ 3.7</b> | 8.2      | ---      |







# OIL ANALYSIS REPORT

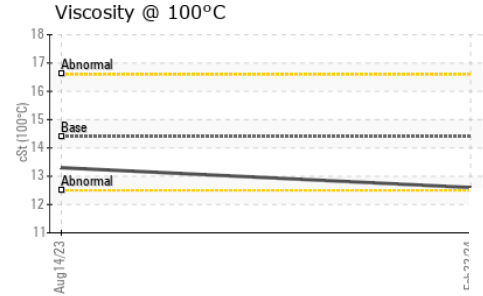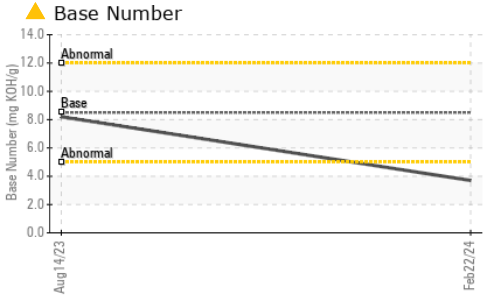

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      |
| Debris           | scalar | *Visual    | NONE    | NONE     | ---      |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | ---      |
| Free Water       | scalar | *Visual    |         | NEG      | ---      |

| FLUID PROPERTIES | method | limit/base | current | history1    | history2 |     |
|------------------|--------|------------|---------|-------------|----------|-----|
| Visc @ 100°C     | cSt    | ASTM D445  | 14.4    | <b>12.6</b> | 13.3     | --- |

## GRAPHS

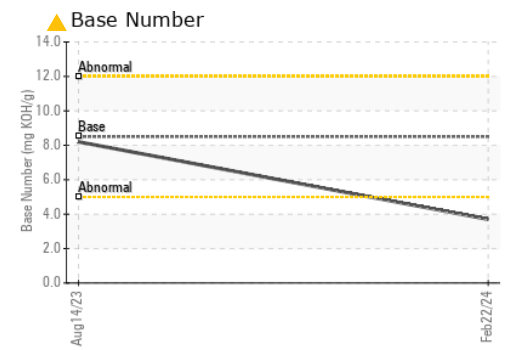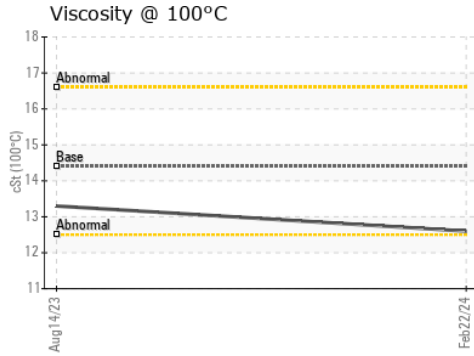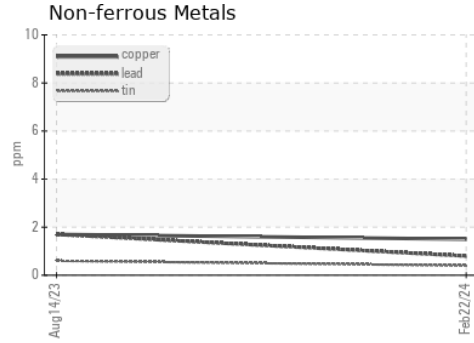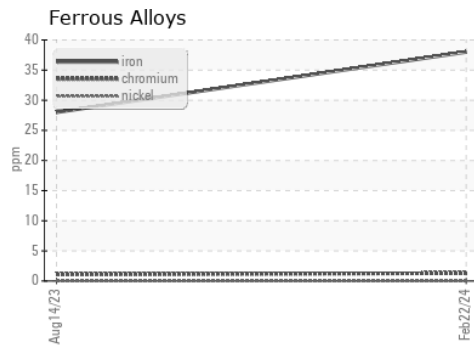

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0113039      **Received** : 07 Mar 2024  
**Lab Number** : **06111895**      **Tested** : 08 Mar 2024  
**Unique Number** : 10915392      **Diagnosed** : 10 Mar 2024 - Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 924 - Madison HC**  
 300 Raemisch Road  
 Waunakee, WI  
 US 53597  
 Contact: Ben Briggs  
 ben.briggs@gflenv.com  
 T: (608)770-9196  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)