



PROBLEM SUMMARY

Sample Rating Trend


FUEL





Machine Id
210007

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (20 QTS)

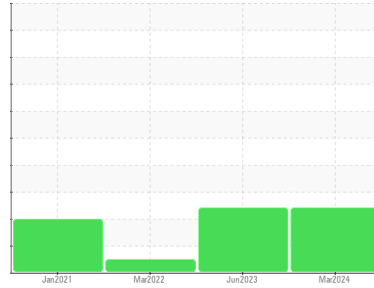

COMPONENT CONDITION SUMMARY

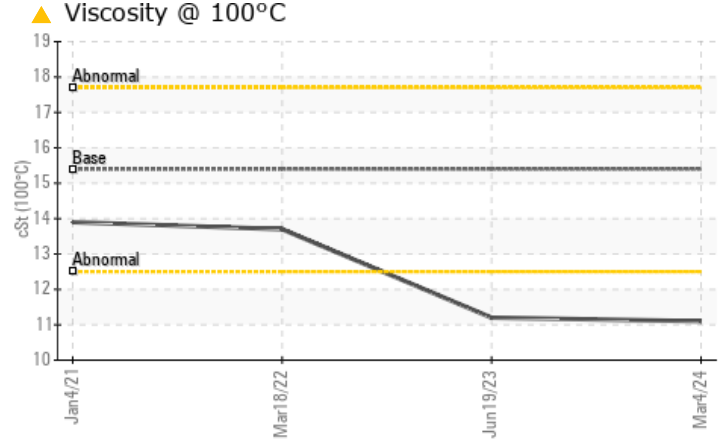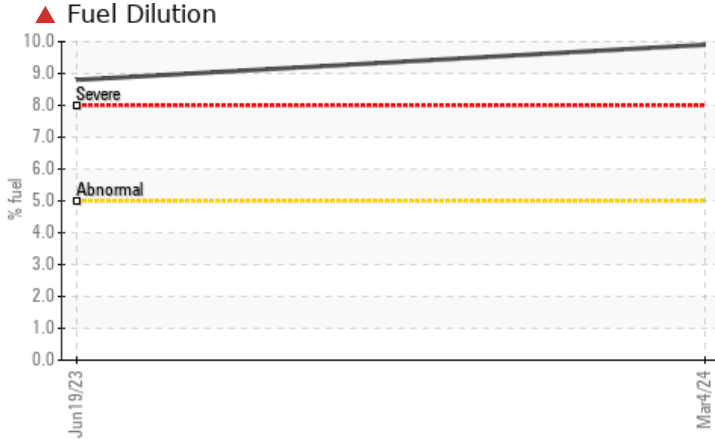

RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	NORMAL
Fuel	%	ASTM D3524	>5	▲ 9.9	▲ 8.8	<1.0
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.1	▲ 11.2	13.7

Customer Id: GFL656
 Sample No.: GFL0096496
 Lab Number: 06111903
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

19 Jun 2023 Diag: Wes Davis

FUEL



We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

view report



18 Mar 2022 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



04 Jan 2021 Diag: Jonathan Hester

GLYCOL



Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. The aluminum level is abnormal. All other component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is negative. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

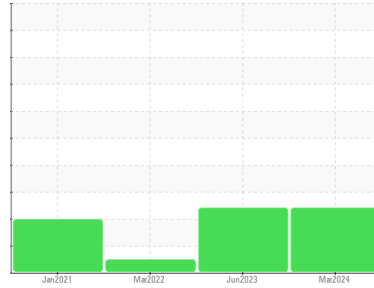

FUEL



Machine Id
210007

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (20 QTS)

DIAGNOSIS

▲ Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0096496	GFL0062009	GFL0031136
Sample Date	Client Info	04 Mar 2024	19 Jun 2023	18 Mar 2022
Machine Age	hrs	2715	2428	1655
Oil Age	hrs	350	605	355
Oil Changed	Client Info	Not Changed	Changed	Changed
Sample Status		SEVERE	SEVERE	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	17	55	29
Chromium	ppm ASTM D5185m >20	<1	1	<1
Nickel	ppm ASTM D5185m >4	0	<1	0
Titanium	ppm ASTM D5185m	0	1	5
Silver	ppm ASTM D5185m >3	0	0	<1
Aluminum	ppm ASTM D5185m >20	8	31	17
Lead	ppm ASTM D5185m >40	0	<1	0
Copper	ppm ASTM D5185m >330	1	5	2
Tin	ppm ASTM D5185m >15	0	<1	<1
Antimony	ppm ASTM D5185m	---	---	---
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	11	7	15
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	56	62	54
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 1010	803	866	902
Calcium	ppm ASTM D5185m 1070	954	1089	1080
Phosphorus	ppm ASTM D5185m 1150	842	906	1024
Zinc	ppm ASTM D5185m 1270	1045	1192	1174
Sulfur	ppm ASTM D5185m 2060	2619	3107	2814

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	4	8	5
Sodium	ppm ASTM D5185m	2	0	1
Potassium	ppm ASTM D5185m >20	16	80	22
Fuel	% ASTM D3524 >5	▲ 9.9	▲ 8.8	<1.0

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.3	0.7	0.3
Nitration	Abs/cm *ASTM D7624 >20	9.6	10.5	7.0
Sulfation	Abs/.1mm *ASTM D7415 >30	20.5	21.7	18.0

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	19.9	20.2	14.0
Base Number (BN)	mg KOH/g ASTM D2896 9.8	6.5	5.7	8.3







OIL ANALYSIS REPORT

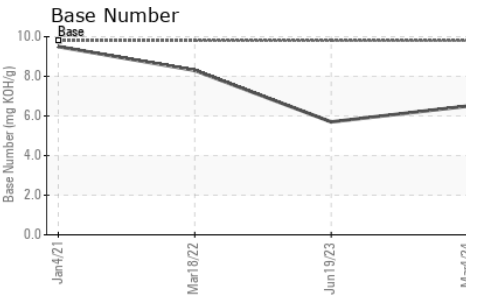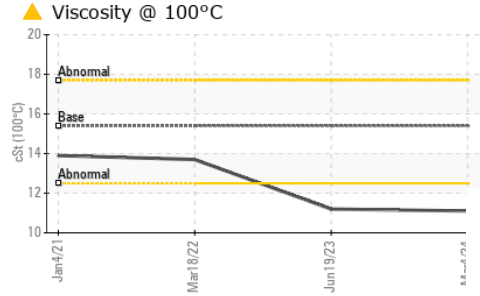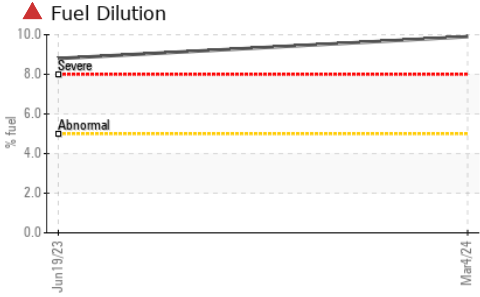

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.1	▲ 11.2	13.7

GRAPHS

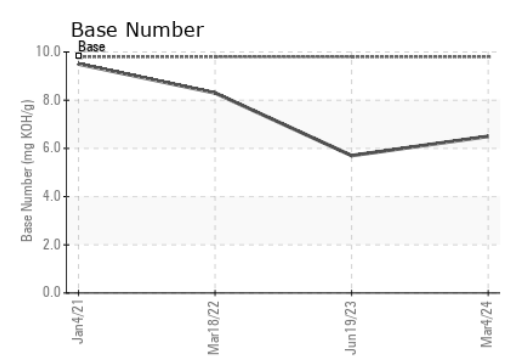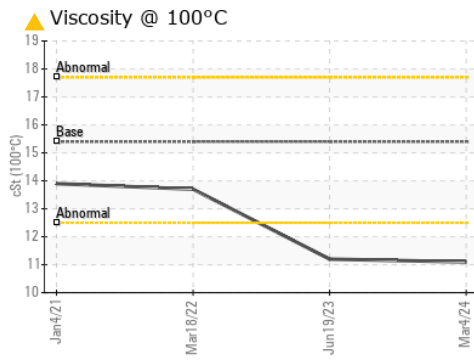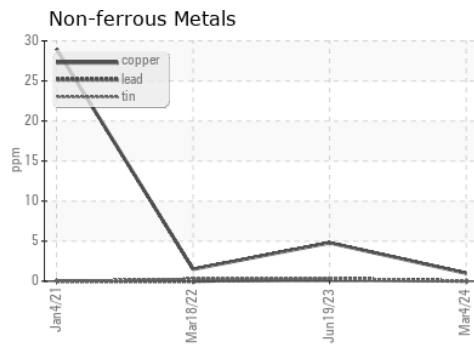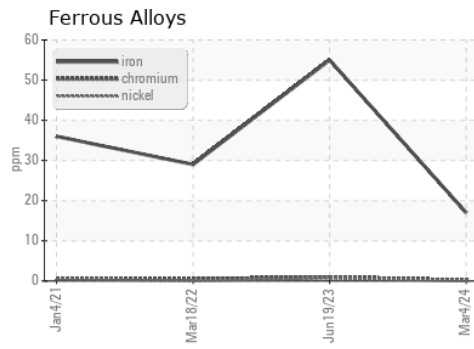

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0096496 **Received** : 07 Mar 2024
Lab Number : 06111903 **Tested** : 11 Mar 2024
Unique Number : 10915400 **Diagnosed** : 11 Mar 2024 - Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 656 - Culpeper Hauling
 15490 Montanus Drive
 Culpeper, VA
 US 22701
 Contact: Matt Hanna
 mhanna@gflenv.com
 T: (540)727-0887
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)