



# OIL ANALYSIS REPORT


Sample Rating Trend

**NORMAL**



Area  
**(43316HA)**  
Machine Id  
**426030-4031**

Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

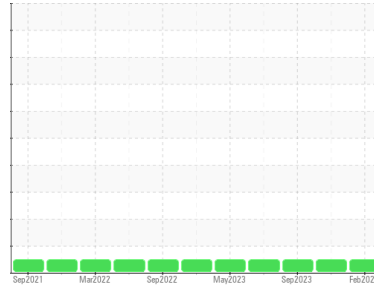

## DIAGNOSIS

**Recommendation**  
Resample at the next service interval to monitor.

**Wear**  
All component wear rates are normal.

**Contamination**  
There is no indication of any contamination in the oil.

**Fluid Condition**  
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0112792</b>	GFL0101336	GFL0091781
Sample Date	Client Info			<b>29 Feb 2024</b>	13 Dec 2023	01 Sep 2023
Machine Age	hrs	Client Info		<b>18549</b>	18010	17374
Oil Age	hrs	Client Info		<b>0</b>	456	0
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>12</b>	13	11
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	<1
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>1</b>	1	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>0</b>	2	5
Barium	ppm	ASTM D5185m	0	<b>0</b>	12	0
Molybdenum	ppm	ASTM D5185m	60	<b>62</b>	59	63
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	1010	<b>965</b>	924	1024
Calcium	ppm	ASTM D5185m	1070	<b>1081</b>	1038	1146
Phosphorus	ppm	ASTM D5185m	1150	<b>994</b>	989	1051
Zinc	ppm	ASTM D5185m	1270	<b>1215</b>	1201	1289
Sulfur	ppm	ASTM D5185m	2060	<b>3137</b>	3274	3797



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>5</b>	4	6
Sodium	ppm	ASTM D5185m		<b>1</b>	0	<1
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.9	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.5</b>	5.8	7.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.0</b>	18.5	17.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.0</b>	13.0	13.8
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>9.0</b>	9.7	8.8







# OIL ANALYSIS REPORT

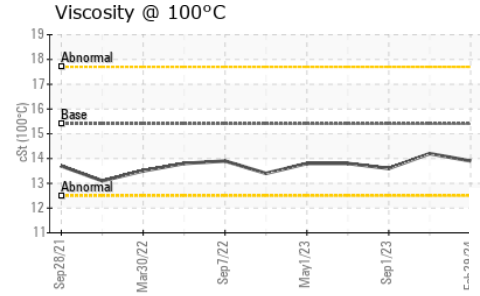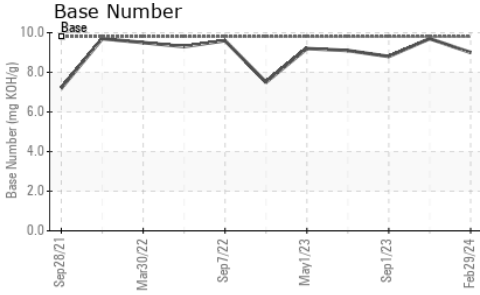

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	14.2

## GRAPHS

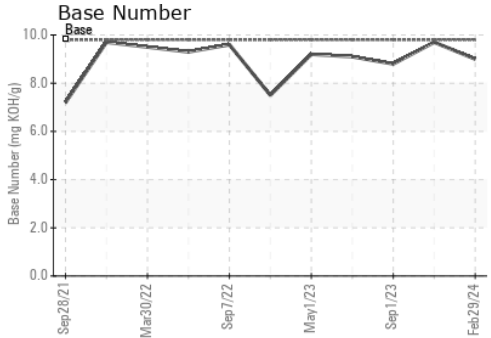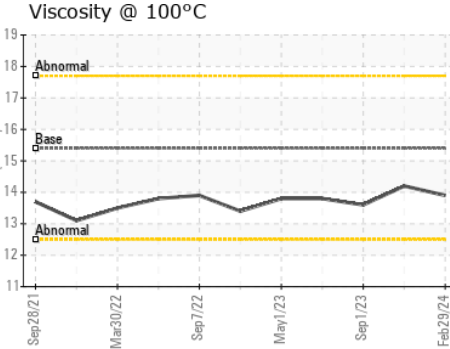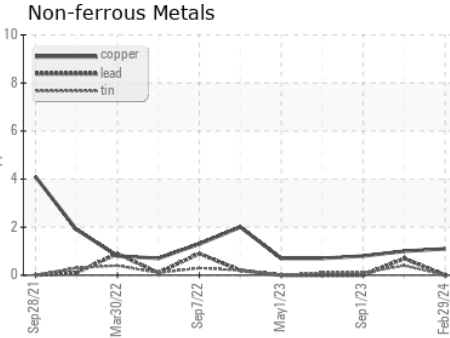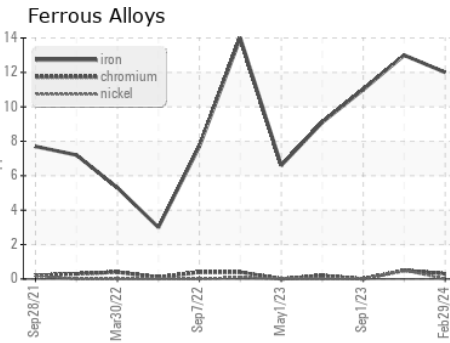

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0112792  
 Lab Number : 06111948  
 Unique Number : 10915445  
 Test Package : FLEET

Received : 07 Mar 2024  
 Tested : 08 Mar 2024  
 Diagnosed : 08 Mar 2024 - Wes Davis

GFL Environmental - 654 - Richmond Hauling  
 11800 Lewis Road  
 Chester, VA  
 US 23831  
 Contact: Jimmy Mayes  
 jmayes@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: