


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

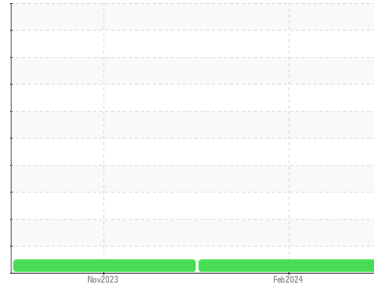

Area
(57264Z) Walgreens - Tractor
Machine Id
[Walgreens - Tractor] 136A63368
Component
Diesel Engine
Fluid
PETRO CANADA DURON UHP 10W40 (11 GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0117906	PCA0105429	---
Sample Date	Client Info		13 Feb 2024	06 Nov 2023	---
Machine Age	mls	Client Info	49910	37694	---
Oil Age	mls	Client Info	25000	9061	---
Oil Changed	Client Info		Changed	Not Changd	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	36	30	---
Chromium	ppm	ASTM D5185m >20	3	1	---
Nickel	ppm	ASTM D5185m >4	3	4	---
Titanium	ppm	ASTM D5185m	0	<1	---
Silver	ppm	ASTM D5185m >3	<1	<1	---
Aluminum	ppm	ASTM D5185m >20	20	8	---
Lead	ppm	ASTM D5185m >40	4	2	---
Copper	ppm	ASTM D5185m >330	7	10	---
Tin	ppm	ASTM D5185m >15	1	<1	---
Vanadium	ppm	ASTM D5185m	<1	0	---
Cadmium	ppm	ASTM D5185m	<1	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	7	12	---
Barium	ppm	ASTM D5185m 0	0	0	---
Molybdenum	ppm	ASTM D5185m 60	59	59	---
Manganese	ppm	ASTM D5185m 0	2	1	---
Magnesium	ppm	ASTM D5185m 1010	892	790	---
Calcium	ppm	ASTM D5185m 1070	1191	1149	---
Phosphorus	ppm	ASTM D5185m 1150	1007	949	---
Zinc	ppm	ASTM D5185m 1270	1254	1179	---
Sulfur	ppm	ASTM D5185m 2060	2847	3009	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	12	12	---
Sodium	ppm	ASTM D5185m	2	0	---
Potassium	ppm	ASTM D5185m >20	53	28	---
Fuel	%	ASTM D3524 >2.0	<1.0	<1.0	---





INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	0.1	---
Nitration	Abs/cm	*ASTM D7624 >20	7.6	6.2	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.4	19.1	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.6	14.9	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.6	8.5	---





OIL ANALYSIS REPORT

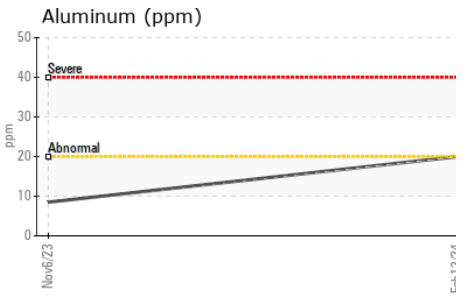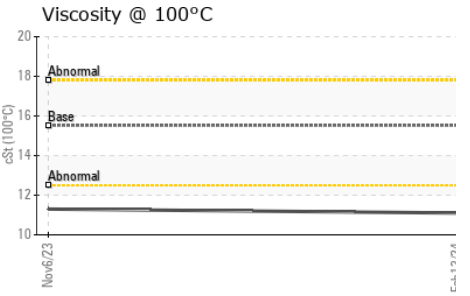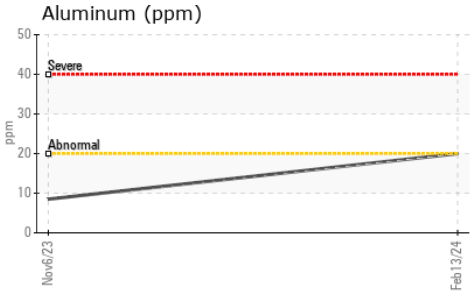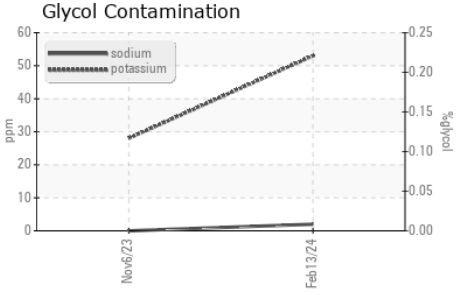

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.52	11.1	11.3

GRAPHS

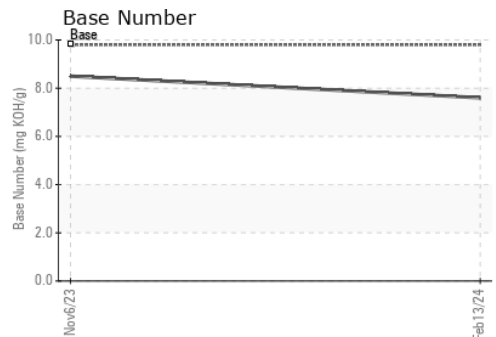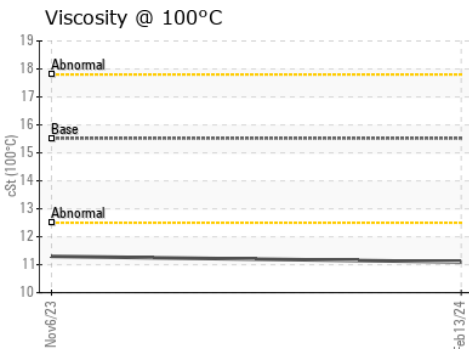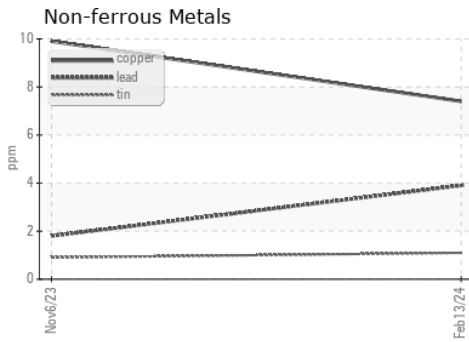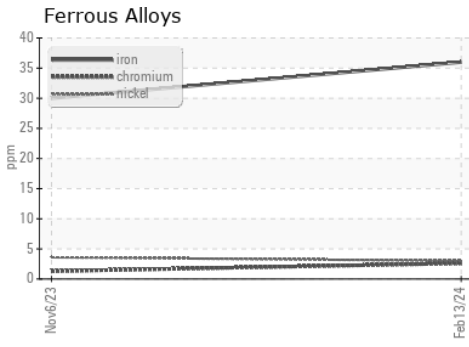

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0117906 **Received** : 08 Mar 2024
Lab Number : 06112442 **Tested** : 11 Mar 2024
Unique Number : 10915939 **Diagnosed** : 11 Mar 2024 - Don Baldrige
Test Package : FLEET (Additional Tests: FuelDilution)

Transervice - Shop 1366 - Berkeley-Woodland
 2370 East Main Street
 Woodland, CA
 US 95776
 Contact: Gary Mann
 gmanna@transervice.com
 T: (530)666-7771
 F: (530)406-7971

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)