


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

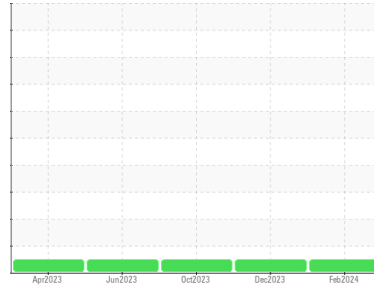

Area  
**(16092Z) Walgreens - Tractor**  
Machine Id  
**[Walgreens - Tractor] 136A61409**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0117916</b>	PCA0105469	PCA0105421
Sample Date	Client Info	<b>20 Feb 2024</b>	14 Dec 2023	24 Oct 2023
Machine Age	mls Client Info	<b>268368</b>	252014	226190
Oil Age	mls Client Info	<b>39000</b>	26000	25000
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Not Changd
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>18</b>	16	7
Chromium	ppm ASTM D5185m >5	<b>2</b>	1	<1
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	0
Titanium	ppm ASTM D5185m	<b>0</b>	0	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >30	<b>7</b>	5	3
Lead	ppm ASTM D5185m >30	<b>1</b>	0	0
Copper	ppm ASTM D5185m >150	<b>6</b>	6	4
Tin	ppm ASTM D5185m >5	<b>0</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>2</b>	2	4
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 50	<b>61</b>	62	62
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m 950	<b>973</b>	1004	931
Calcium	ppm ASTM D5185m 1050	<b>1096</b>	1100	1089
Phosphorus	ppm ASTM D5185m 995	<b>968</b>	1071	1012
Zinc	ppm ASTM D5185m 1180	<b>1211</b>	1311	1250
Sulfur	ppm ASTM D5185m 2600	<b>2386</b>	2902	3115

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>7</b>	6	4
Sodium	ppm ASTM D5185m	<b>2</b>	2	0
Potassium	ppm ASTM D5185m >20	<b>8</b>	4	3



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.8</b>	0.6	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>9.3</b>	8.5	6.7
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.3</b>	20.8	19.0

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>18.4</b>	17.0	14.2
Base Number (BN)	mg KOH/g ASTM D2896	<b>5.6</b>	6.5	8.5





# OIL ANALYSIS REPORT

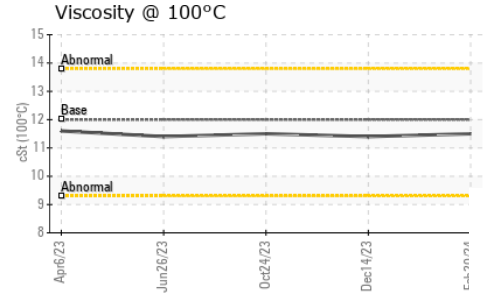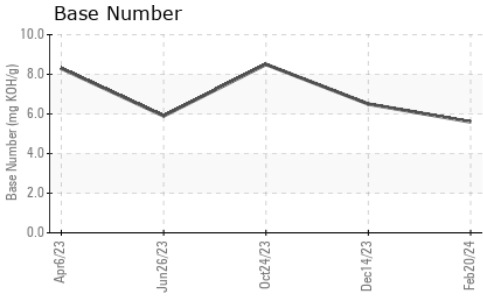

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.5</b>	11.4	11.5

## GRAPHS

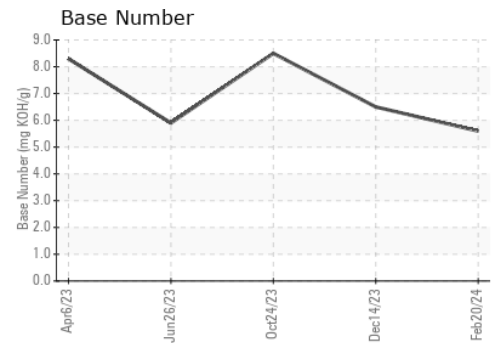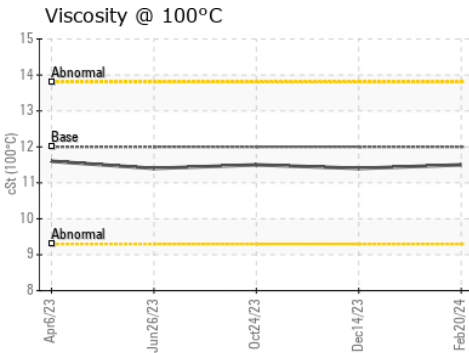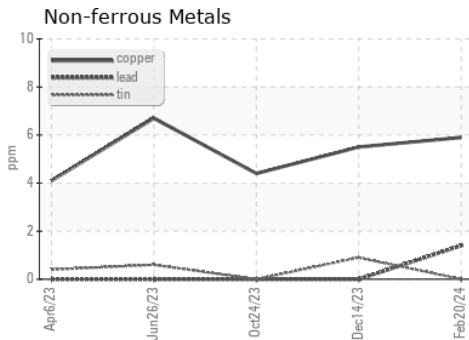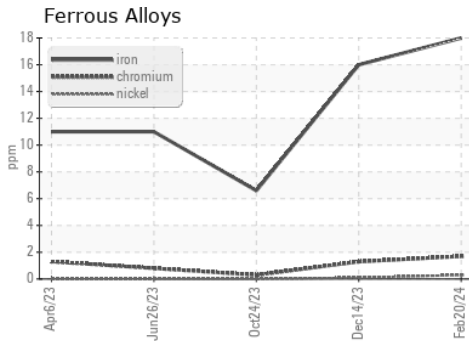

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0117916 **Received** : 08 Mar 2024  
**Lab Number** : **06112447** **Tested** : 08 Mar 2024  
**Unique Number** : 10915944 **Diagnosed** : 08 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1366 - Berkeley-Woodland**  
 2370 East Main Street  
 Woodland, CA  
 US 95776  
 Contact: Gary Mann  
 gmanna@transervice.com  
 T: (530)666-7771  
 F: (530)406-7971

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)