




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

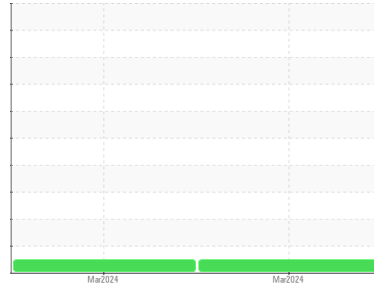

Machine Id
325053

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0068899	GFL0068905	---
Sample Date	Client Info		06 Mar 2024	01 Mar 2024	---
Machine Age	hrs	Client Info	19968	19827	---
Oil Age	hrs	Client Info	19968	19827	---
Oil Changed	Client Info		Changed	Changed	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	---
Water	WC Method	>0.2	NEG	NEG	---
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	0	8	---
Chromium	ppm	ASTM D5185m >20	<1	0	---
Nickel	ppm	ASTM D5185m >4	<1	<1	---
Titanium	ppm	ASTM D5185m	0	0	---
Silver	ppm	ASTM D5185m >3	0	0	---
Aluminum	ppm	ASTM D5185m >20	1	3	---
Lead	ppm	ASTM D5185m >40	<1	0	---
Copper	ppm	ASTM D5185m >330	0	1	---
Tin	ppm	ASTM D5185m >15	0	0	---
Vanadium	ppm	ASTM D5185m	<1	<1	---
Cadmium	ppm	ASTM D5185m	<1	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	5	2	---
Barium	ppm	ASTM D5185m 0	0	0	---
Molybdenum	ppm	ASTM D5185m 60	54	57	---
Manganese	ppm	ASTM D5185m 0	<1	<1	---
Magnesium	ppm	ASTM D5185m 1010	949	916	---
Calcium	ppm	ASTM D5185m 1070	1010	1032	---
Phosphorus	ppm	ASTM D5185m 1150	989	966	---
Zinc	ppm	ASTM D5185m 1270	1208	1125	---
Sulfur	ppm	ASTM D5185m 2060	3004	2948	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	3	4	---
Sodium	ppm	ASTM D5185m	2	4	---
Potassium	ppm	ASTM D5185m >20	2	0	---

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	0.2	---
Nitration	Abs/cm	*ASTM D7624 >20	5.3	7.5	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	17.5	17.8	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	13.5	14.2	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.1	7.5	---







OIL ANALYSIS REPORT

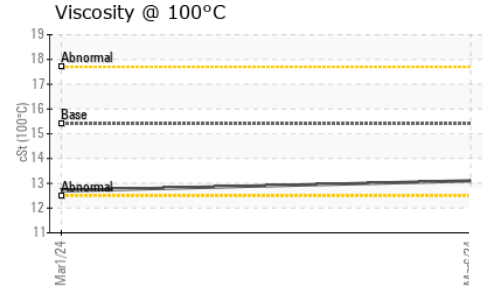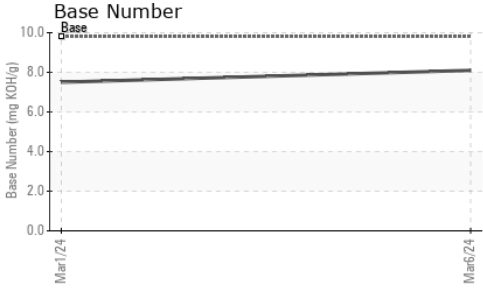

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.1	12.7	---

GRAPHS

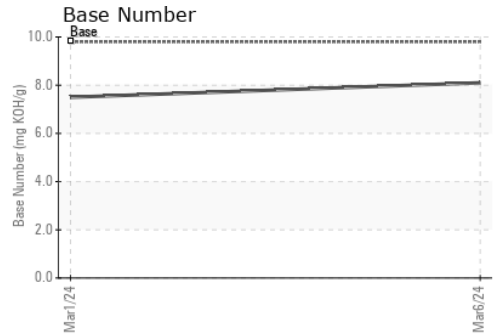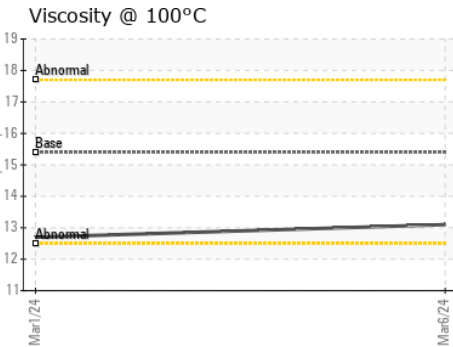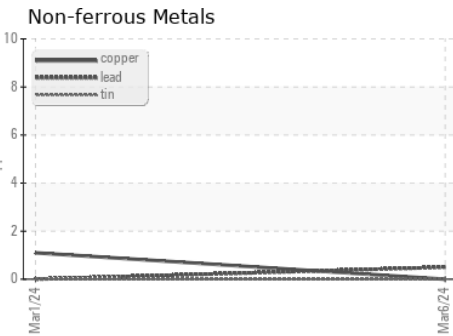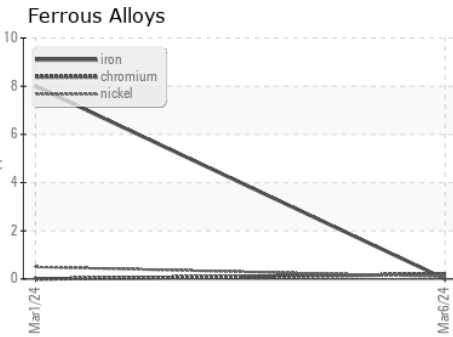

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0068899
Lab Number : **06112499**
Unique Number : 10915996
Test Package : FLEET

Received : 08 Mar 2024
Tested : 08 Mar 2024
Diagnosed : 08 Mar 2024 - Wes Davis

GFL Environmental - 073 - Warner Robins - Transwaste
 155 Story Road
 Warner Robins, GA
 US 31093
 Contact: JOSH MALONEY
 jmaloney@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: