


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

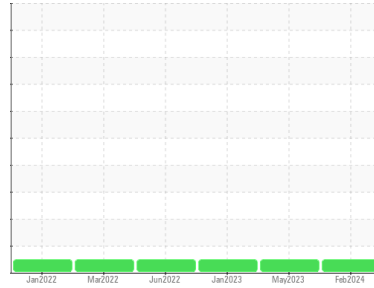

Machine Id

**39**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON HP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0096663</b>	PCA0096630	PCA0088227
Sample Date	Client Info		<b>01 Feb 2024</b>	22 May 2023	04 Jan 2023
Machine Age	mls	Client Info	<b>602321</b>	578456	557086
Oil Age	mls	Client Info	<b>23865</b>	21370	30723
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>33</b>	20	21
Chromium	ppm	ASTM D5185m >20	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>6</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>11</b>	7	6
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>6</b>	6	5
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>6</b>	3	4
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>68</b>	62	64
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>991</b>	982	940
Calcium	ppm	ASTM D5185m	<b>1194</b>	1141	1195
Phosphorus	ppm	ASTM D5185m	<b>1134</b>	1003	1052
Zinc	ppm	ASTM D5185m	<b>1307</b>	1231	1276
Sulfur	ppm	ASTM D5185m	<b>2878</b>	2784	2605

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	5	6
Sodium	ppm	ASTM D5185m	<b>0</b>	3	<1
Potassium	ppm	ASTM D5185m >20	<b>3</b>	<1	3



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1</b>	0.8	0.8
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.7</b>	11.2	12.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.4</b>	24.6	25.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>22.3</b>	21.8	22.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.3</b>	6.3	6.0









# OIL ANALYSIS REPORT

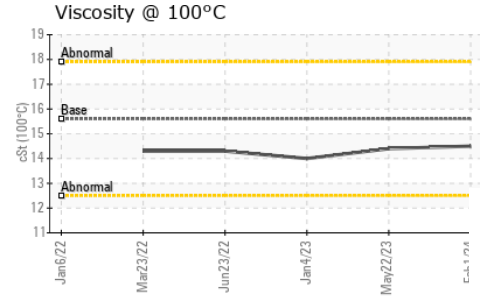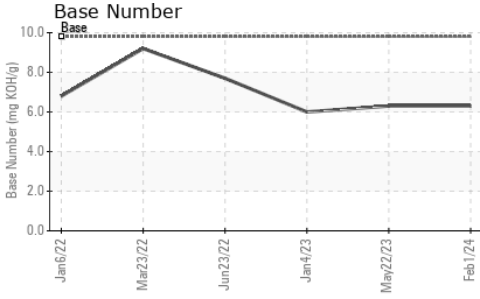

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.6	14.5	14.4

## GRAPHS

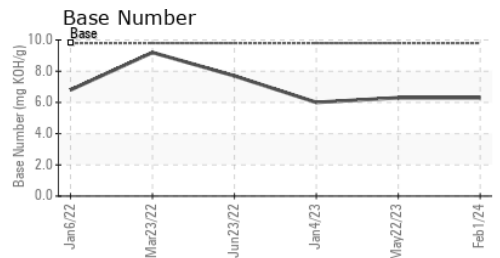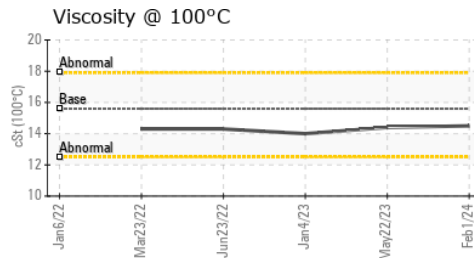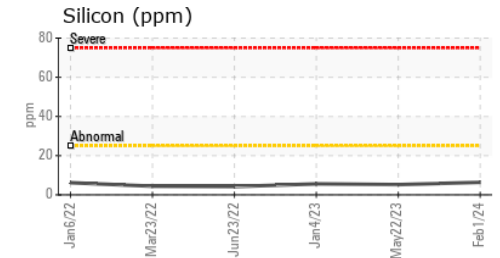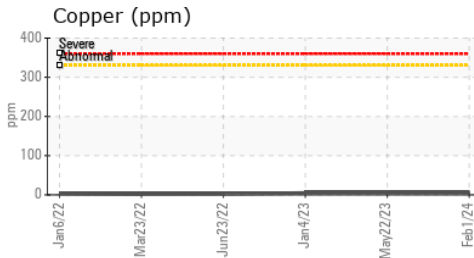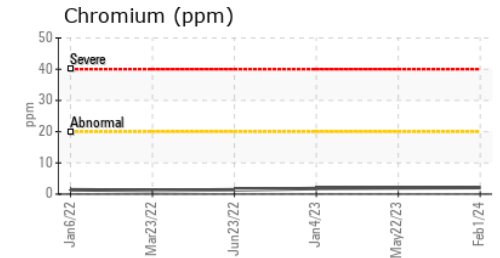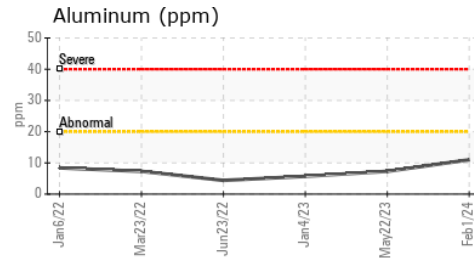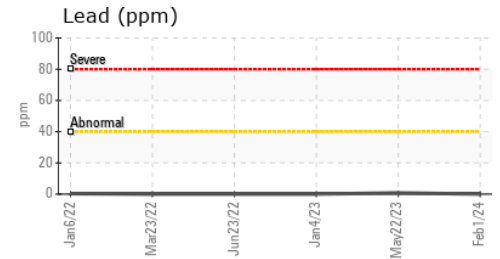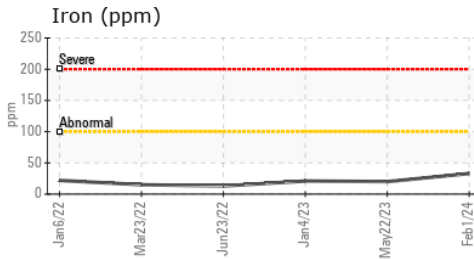

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0096663      **Received** : 08 Mar 2024  
**Lab Number** : 06112566      **Tested** : 11 Mar 2024  
**Unique Number** : 10916063      **Diagnosed** : 11 Mar 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**AREA WIDE TRANSPORTATION**  
 3085 IL RT 71  
 OTTAWA, IL  
 US 61350  
 Contact: JEFF  
 jeff@driveawt.com  
 T: (815)587-2947  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)