



OIL ANALYSIS REPORT


Sample Rating Trend

VISCOSITY



Area
(YA172350)
Machine Id
413020

Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 30 (24 QTS)

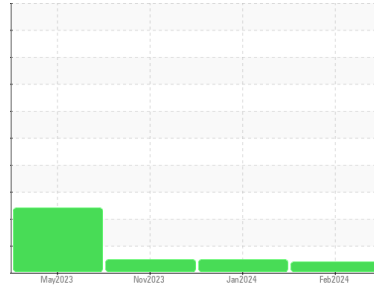

DIAGNOSIS

- Recommendation**
Resample at the next service interval to monitor.
- Wear**
All component wear rates are normal.
- Contamination**
There is no indication of any contamination in the oil.
- Fluid Condition**
The oil viscosity is higher than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0109746	GFL0109733	GFL0092657
Sample Date	Client Info	22 Feb 2024	22 Jan 2024	01 Nov 2023
Machine Age	hrs	0	969	2295
Oil Age	hrs	0	502	597
Oil Changed	Client Info	N/A	Changed	Changed
Sample Status		ATTENTION	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	6	16	40
Chromium	ppm ASTM D5185m >20	<1	<1	2
Nickel	ppm ASTM D5185m >5	0	2	3
Titanium	ppm ASTM D5185m >2	<1	<1	0
Silver	ppm ASTM D5185m >2	0	0	<1
Aluminum	ppm ASTM D5185m >20	3	5	14
Lead	ppm ASTM D5185m >40	<1	0	0
Copper	ppm ASTM D5185m >330	2	8	38
Tin	ppm ASTM D5185m >15	<1	<1	2
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	5	4	11
Barium	ppm ASTM D5185m 10	0	0	0
Molybdenum	ppm ASTM D5185m 100	63	64	74
Manganese	ppm ASTM D5185m	0	<1	2
Magnesium	ppm ASTM D5185m 450	888	933	917
Calcium	ppm ASTM D5185m 3000	1090	1123	1234
Phosphorus	ppm ASTM D5185m 1150	1046	1047	898
Zinc	ppm ASTM D5185m 1350	1161	1210	1246
Sulfur	ppm ASTM D5185m 4250	3027	2873	2426

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	4	5	21
Sodium	ppm ASTM D5185m >75	0	1	2
Potassium	ppm ASTM D5185m >20	4	8	41

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	0.2	0.3	0.6
Nitration	Abs/cm *ASTM D7624 >20	6.5	8.6	10.3
Sulfation	Abs/.1mm *ASTM D7415 >30	17.9	19.3	22.5

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	14.3	15.3	19.9
Base Number (BN)	mg KOH/g ASTM D2896 8.5	8.1	6.9	5.3







OIL ANALYSIS REPORT

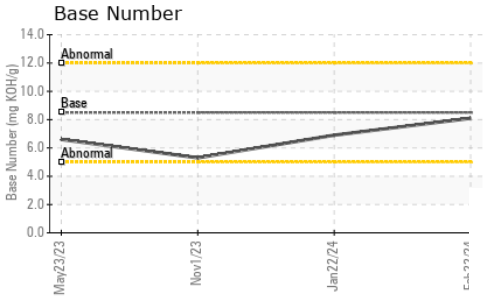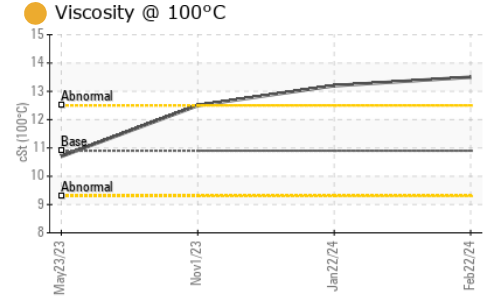

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.9 ● 13.5	13.2	12.5

GRAPHS

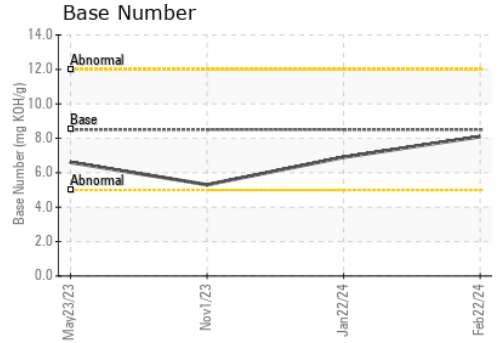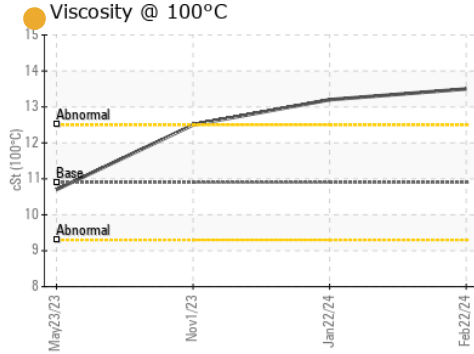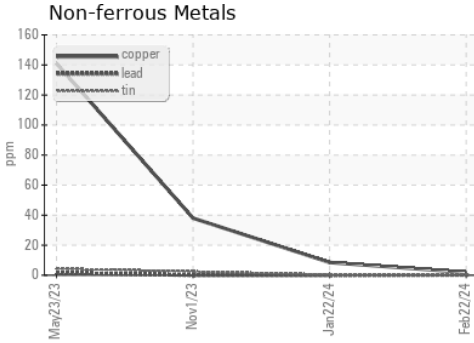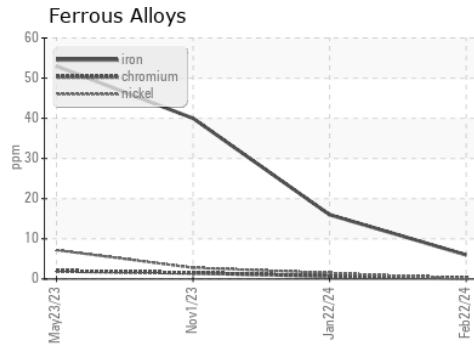

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0109746
Lab Number : 06112570
Unique Number : 10916067
Test Package : FLEET

Received : 08 Mar 2024
Tested : 11 Mar 2024
Diagnosed : 11 Mar 2024 - Don Baldrige

GFL Environmental - 005 - Wilson/Tri-East (CNG)
 2810 Contentnea Road S
 Wilson, NC
 US 27893-8501
 Contact: SPENCER LIGGON
 spencer.liggon@gflenv.com
 T: (800)207-6618
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)