


OIL ANALYSIS REPORT

(59083Z) Walgreens - Tractor

Diesel Engine

PETRO CANADA DURON SHP 10W30 (11 GAL)

[Walgreens - Tractor] 136A624219





DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

GAL)			Jan 2024	Feb2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0106555	PCA0103573	
Sample Date		Client Info		23 Feb 2024	15 Jan 2024	
Machine Age	mls	Client Info		61446	59720	
Oil Age	mls	Client Info		50000	59720	
Oil Changed		Client Info		Changed	Changed	
Sample Status				NORMAL	ABNORMAL	
CONTAMINATI	ON	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	
Water		WC Method	>0.2	NEG	NEG	
Glycol		WC Method		NEG	NEG	
WEAR METALS	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	71	54	
Chromium	ppm	ASTM D5185m	>5	5	4	
Nickel	ppm	ASTM D5185m	>2	2	<1	
Titanium	ppm	ASTM D5185m		<1	<1	
Silver	ppm	ASTM D5185m	>3	<1	<1	
Aluminum	ppm	ASTM D5185m	>30	168	94	
Lead	ppm	ASTM D5185m	>30	<1	0	
Copper	ppm	ASTM D5185m	>150	155	<u>^</u> 227	
Tin	ppm	ASTM D5185m	>5	8	6	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	21	15	
Barium	ppm	ASTM D5185m	0	0	0	
Molybdenum	ppm	ASTM D5185m	50	39	40	
Manganese	ppm	ASTM D5185m		4	5	
Magnesium	ppm	ASTM D5185m	950	580	542	
Calcium	ppm	ASTM D5185m	1050	1641	1512	
Phosphorus	ppm	ASTM D5185m	995	739	710	
Zinc	ppm	ASTM D5185m	1180	950	821	
Sulfur	ppm	ASTM D5185m	2600	1882	1658	
CONTAMINAN		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	9	8	
Sodium	ppm	ASTM D5185m	00	7	6	
Potassium	ppm	ASTM D5185m	>20	394	232	
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.9	0.7	
Nitration	Abs/cm	*ASTM D7624	>20	11.6	11.8	
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.0	24.1	
FLUID DEGRAD			limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	27.7	27.9	
Base Number (BN)	mg KOH/g	ASTM D2896		5.3	5.3	



OIL ANALYSIS REPORT

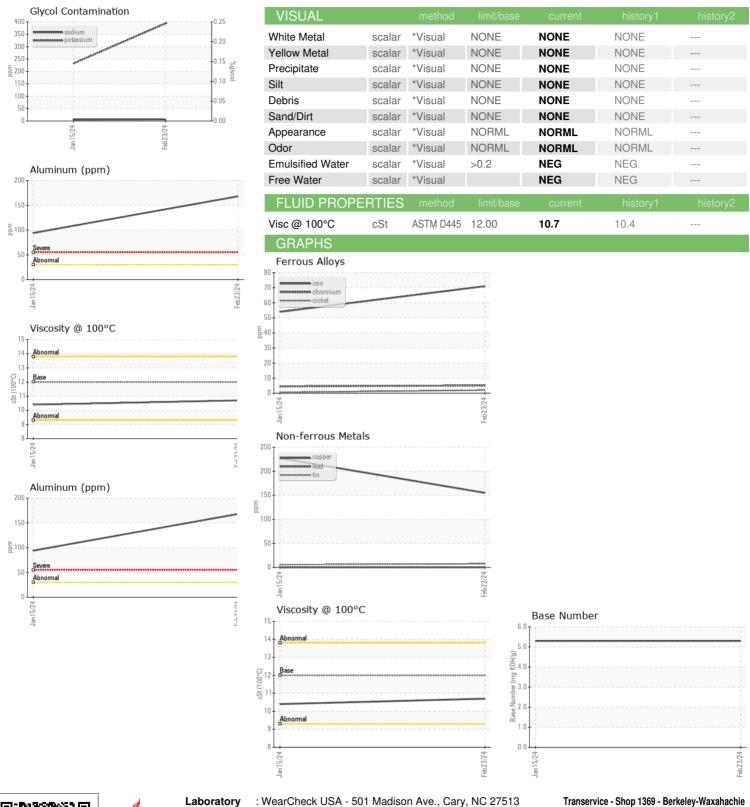





Laboratory Sample No.

: PCA0106555 Lab Number : 06112614 **Unique Number** : 10916111 Test Package : FLEET

Received : 08 Mar 2024 **Tested** : 11 Mar 2024

: 11 Mar 2024 - Don Baldridge Diagnosed

710 Ovilla Road

Waxahachie, TX US 75167

F: (972)923-9919

Contact: Robert Beal rbeal@transervice.com T: (972)923-9928

Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Robert Beal - TSV1369