




OIL ANALYSIS REPORT

Sample Rating Trend

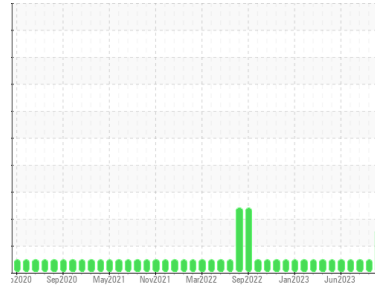

WEAR



Area
(YA133453)

Machine Id
3689C

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (38 QTS)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

The chromium level is abnormal. The aluminum level is abnormal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0111058	GFL0098522	GFL0087747
Sample Date	Client Info	06 Mar 2024	10 Jan 2024	14 Sep 2023
Machine Age	hrs	19762	19672	13715
Oil Age	hrs	1145	808	1200
Oil Changed	Client Info	Changed	Not Changd	Changed
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	45	22	12
Chromium	ppm ASTM D5185m >4	▲ 8	4	2
Nickel	ppm ASTM D5185m >2	2	<1	<1
Titanium	ppm ASTM D5185m	0	<1	<1
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >9	▲ 16	9	2
Lead	ppm ASTM D5185m >30	<1	<1	<1
Copper	ppm ASTM D5185m >35	<1	1	<1
Tin	ppm ASTM D5185m >4	1	<1	2
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	0	0	<1

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 50	5	4	25
Barium	ppm ASTM D5185m 5	0	0	44
Molybdenum	ppm ASTM D5185m 50	54	51	48
Manganese	ppm ASTM D5185m 0	2	<1	3
Magnesium	ppm ASTM D5185m 560	566	502	514
Calcium	ppm ASTM D5185m 1510	1556	1460	1399
Phosphorus	ppm ASTM D5185m 780	783	694	688
Zinc	ppm ASTM D5185m 870	967	883	862
Sulfur	ppm ASTM D5185m 2040	2348	2418	2501

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >+100	8	6	12
Sodium	ppm ASTM D5185m	8	4	2
Potassium	ppm ASTM D5185m >20	3	3	3

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	0.1	0	0
Nitration	Abs/cm *ASTM D7624 >20	12.1	10.9	7.9
Sulfation	Abs/.1mm *ASTM D7415 >30	25.1	22.3	18.2


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	20.2	18.2	15.1
Base Number (BN)	mg KOH/g ASTM D2896 10.2	3.6	3.5	7.3




OIL ANALYSIS REPORT


▲ Aluminum (ppm)

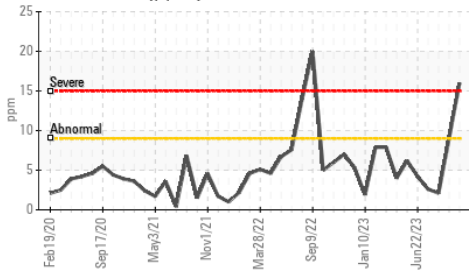


▲ Aluminum (ppm)

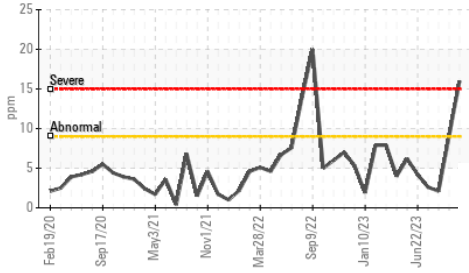

Base Number

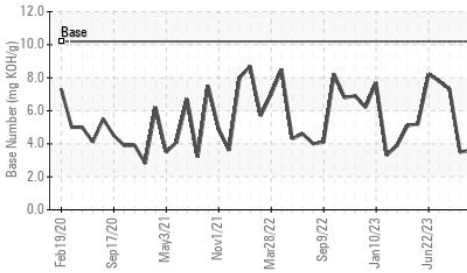

Viscosity @ 100°C

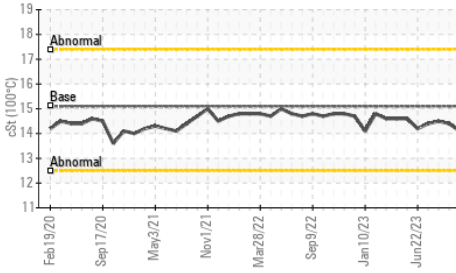

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.1	14.4

GRAPHS


▲ Ferrous Alloys

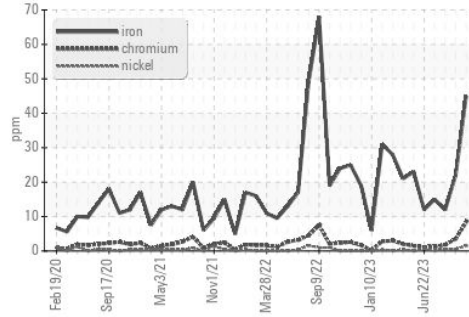


Non-ferrous Metals

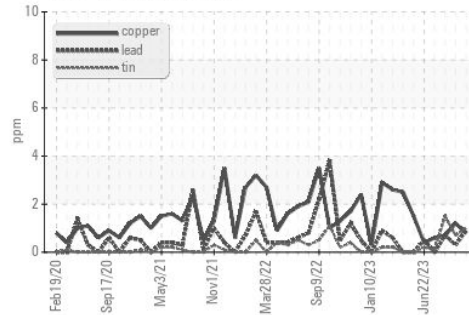

Viscosity @ 100°C

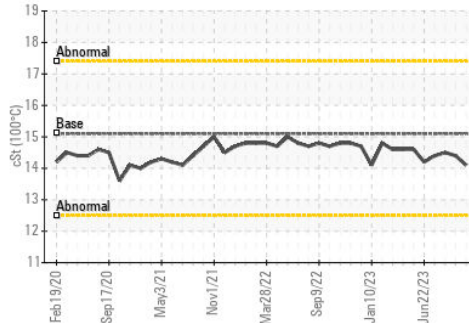

Base Number

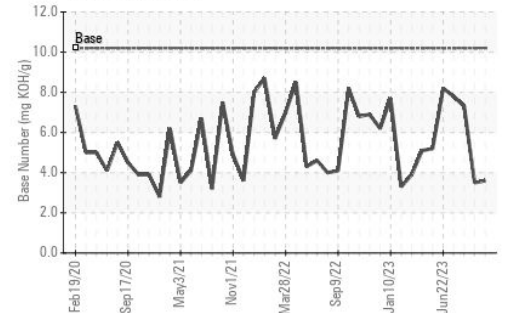

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0111058

Lab Number : 06112675

Unique Number : 10916172

Test Package : FLEET

Received : 08 Mar 2024

Tested : 11 Mar 2024

Diagnosed : 11 Mar 2024 - Don Baldrige

GFL Environmental - 006 - Wilmington

3618 US Highway 421 N

Wilmington, NC

US 28401

Contact: Eric Wood

eric.wood@gflenv.com

T: (717)723-1956

F: (910)762-6880

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)