




OIL ANALYSIS REPORT

Sample Rating Trend

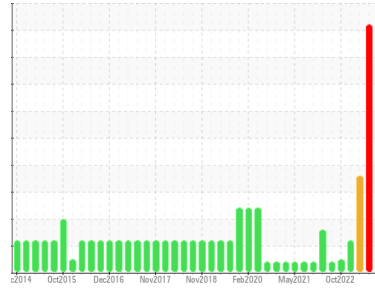

NORMAL



Area
(YA112631) [111070]

Machine Id
10293

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (36 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

No evidence of coolant present in the oil. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0111070	GFL0082260	GFL0082214
Sample Date	Client Info	06 Mar 2024	01 Jun 2023	12 May 2023
Machine Age	hrs	31728	31343	31197
Oil Age	hrs	0	600	300
Oil Changed	Client Info	Changed	Changed	Not Changed
Sample Status		NORMAL	SEVERE	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	14	20	16
Chromium	ppm ASTM D5185m >20	<1	1	1
Nickel	ppm ASTM D5185m >4	<1	0	<1
Titanium	ppm ASTM D5185m	0	0	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	3	3	2
Lead	ppm ASTM D5185m >40	<1	▲ 61	▲ 38
Copper	ppm ASTM D5185m >330	1	9	5
Tin	ppm ASTM D5185m >15	<1	2	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	3	23	3
Barium	ppm ASTM D5185m 0	0	0	2
Molybdenum	ppm ASTM D5185m 60	57	72	75
Manganese	ppm ASTM D5185m 0	<1	<1	<1
Magnesium	ppm ASTM D5185m 1010	932	794	827
Calcium	ppm ASTM D5185m 1070	1039	1227	1246
Phosphorus	ppm ASTM D5185m 1150	1071	984	1057
Zinc	ppm ASTM D5185m 1270	1269	1223	1208
Sulfur	ppm ASTM D5185m 2060	3158	3587	2911

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	4	9	7
Sodium	ppm ASTM D5185m	11	▲ 268	▲ 196
Potassium	ppm ASTM D5185m >20	21	▲ 1355	▲ 569
Fuel	% ASTM D3524 >2.0	<1.0	<1.0	<1.0
Glycol	% *ASTM D2982	NEG	▲ 0.12	NEG

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.1	0.3	0.2
Nitration	Abs/cm *ASTM D7624 >20	6.0	11.4	9.2
Sulfation	Abs/.1mm *ASTM D7415 >30	17.8	19.9	20.1


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	13.8	16.4	16.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.9	16.9	8.9




OIL ANALYSIS REPORT


Glycol Contamination

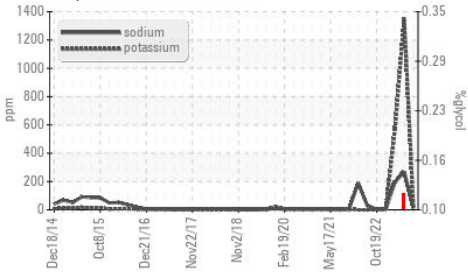


Fuel Dilution

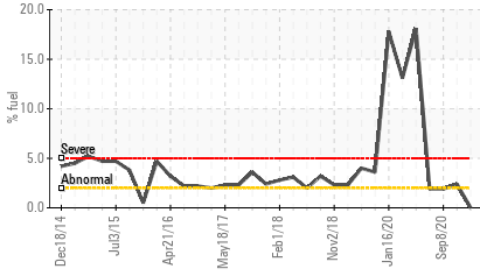

Glycol Contamination

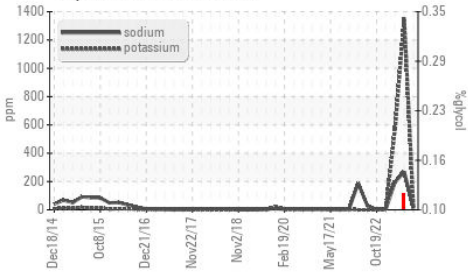

Fuel Dilution

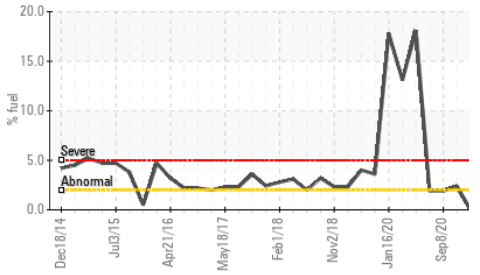


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.3	12.6

GRAPHS


Ferrous Alloys

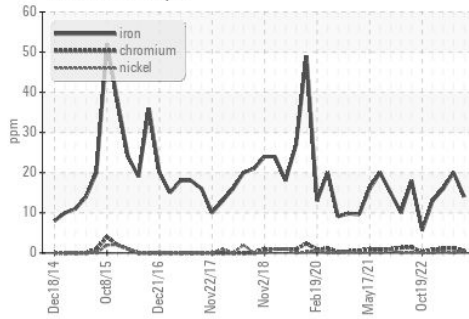


Non-ferrous Metals

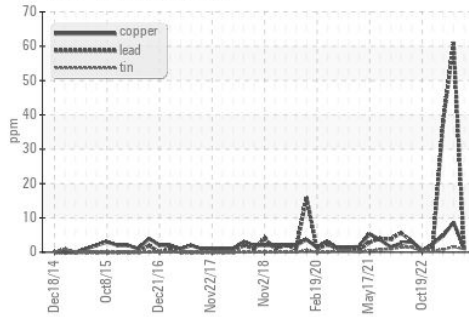

Viscosity @ 100°C

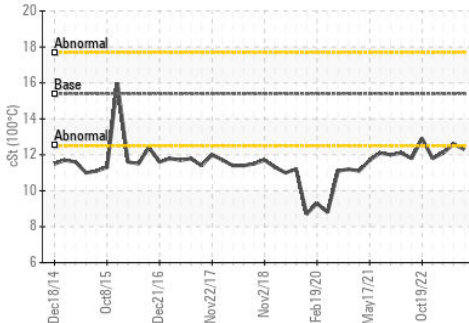

Base Number

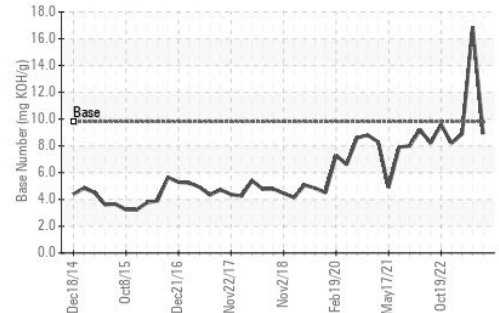

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0111070

Lab Number : 06112678

Unique Number : 10916175

Test Package : FLEET (Additional Tests: FuelDilution)

Received : 08 Mar 2024

Tested : 12 Mar 2024

Diagnosed : 12 Mar 2024 - Jonathan Hester

GFL Environmental - 006 - Wilmington

3618 US Highway 421 N

Wilmington, NC

US 28401

Contact: Eric Wood

eric.wood@gflenv.com

T: (717)723-1956

F: (910)762-6880

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)