




OIL ANALYSIS REPORT

Sample Rating Trend

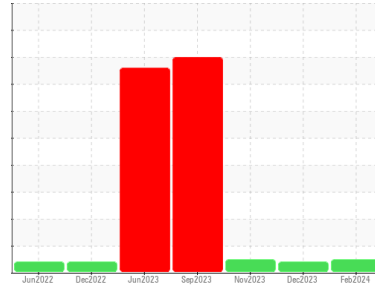

NORMAL



Machine Id
323004-846

Component
Gasoline Engine

Fluid
CHEVRON DELO 400 XLE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0104590	GFL0096325	GFL0096271
Sample Date	Client Info		04 Feb 2024	27 Dec 2023	28 Nov 2023
Machine Age	mls	Client Info	176803	174179	147360
Oil Age	mls	Client Info	174179	149605	0
Oil Changed	Client Info		Not Changed	Changed	Not Changed
Sample Status			NORMAL	ATTENTION	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	1.2	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >150	27	123	99
Chromium	ppm	ASTM D5185m >20	<1	3	2
Nickel	ppm	ASTM D5185m >5	<1	1	<1
Titanium	ppm	ASTM D5185m	9	2	2
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >40	5	12	10
Lead	ppm	ASTM D5185m >50	0	<1	0
Copper	ppm	ASTM D5185m >155	<1	2	1
Tin	ppm	ASTM D5185m >10	0	<1	0
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	47	32	34
Barium	ppm	ASTM D5185m	0	0	2
Molybdenum	ppm	ASTM D5185m	44	69	68
Manganese	ppm	ASTM D5185m	<1	4	3
Magnesium	ppm	ASTM D5185m	583	634	540
Calcium	ppm	ASTM D5185m	1153	1067	998
Phosphorus	ppm	ASTM D5185m 760	611	756	652
Zinc	ppm	ASTM D5185m 830	734	956	839
Sulfur	ppm	ASTM D5185m 2770	2831	3230	3047

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	6	16	14
Sodium	ppm	ASTM D5185m >400	6	13	10
Potassium	ppm	ASTM D5185m >20	5	2	3

INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	14.5	24.3	25.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	25.0	42.5	39.8

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	21.9	46.3	45.4
Base Number (BN)	mg KOH/g	ASTM D2896 10.7	5.4	5.4	6.4







OIL ANALYSIS REPORT

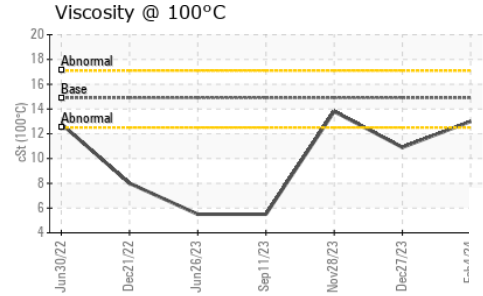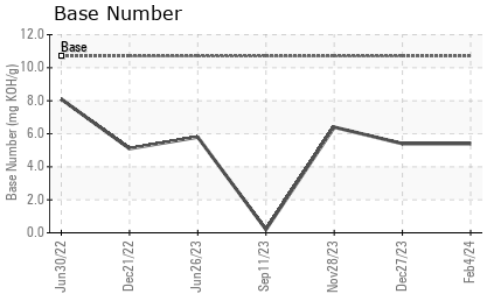

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.9	13.0	10.9	13.8

GRAPHS

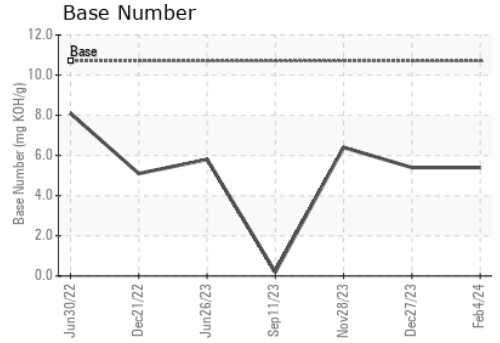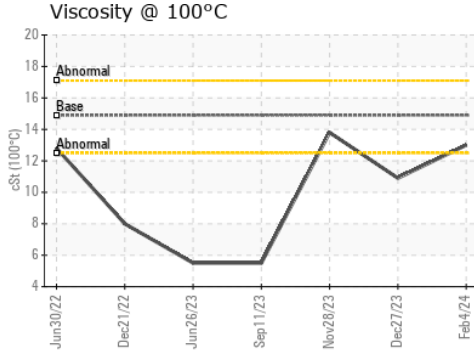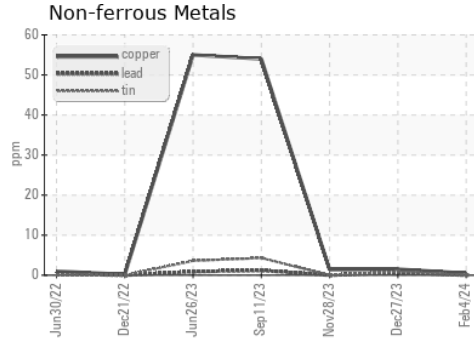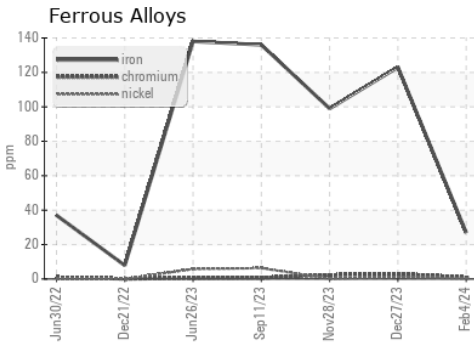

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0104590 **Received** : 08 Mar 2024
Lab Number : **06113380** **Tested** : 11 Mar 2024
Unique Number : 10916877 **Diagnosed** : 12 Mar 2024 - Sean Felton
Test Package : FLEET

GFL Environmental - 624 - Elmira Hauling
 10164 M-32
 Elmira, MI
 US 49730
 Contact: ANDY GROBASKI
 andyg@americanwaste.org
 T: (989)370-2941
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)