




PROBLEM SUMMARY

Sample Rating Trend

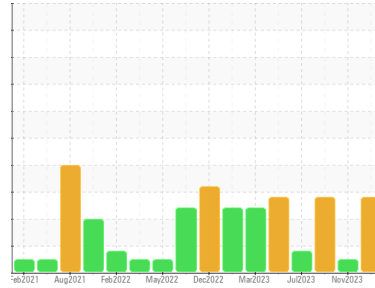

FUEL





Machine Id
827036-1040

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

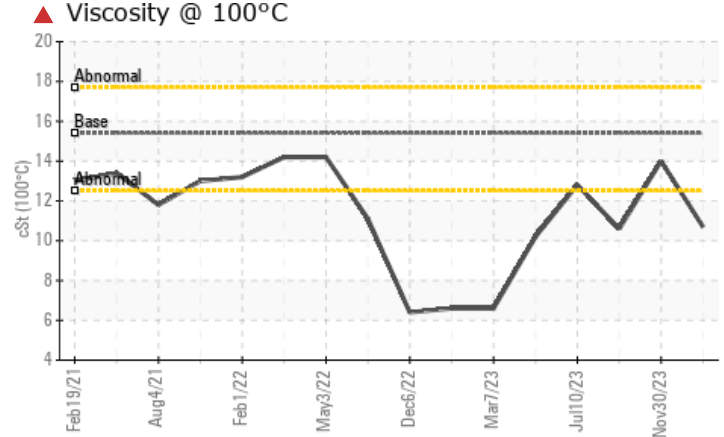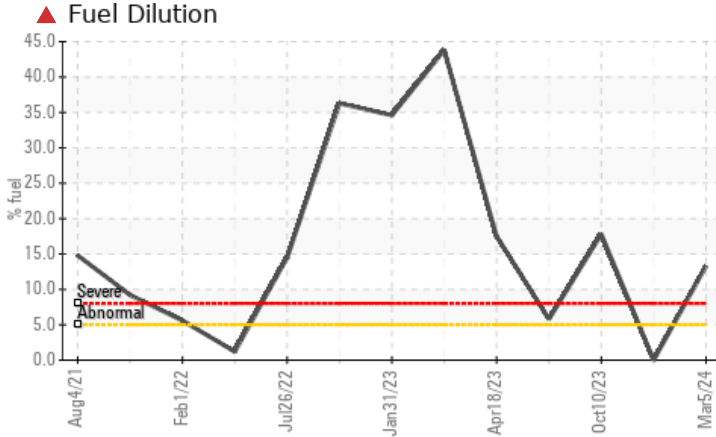

RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. (Customer Sample Comment: Sampled oil)

PROBLEMATIC TEST RESULTS

Sample Status			SEVERE	NORMAL	SEVERE
Fuel	%	ASTM D3524 >5	▲ 13.3	0.0	▲ 17.8
Visc @ 100°C	cSt	ASTM D445 15.4	▲ 10.7	14.0	▲ 10.6

Customer Id: GFL622
 Sample No.: GFL0110305
 Lab Number: 06113445
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Change Filter	---	---	?	We recommend that you drain the oil and perform a filter service on this component if not already done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

30 Nov 2023 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. Fuel content negligible. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



10 Oct 2023 Diag: Wes Davis

FUEL



We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

view report



10 Jul 2023 Diag: Jonathan Hester

FUEL



No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. Discrete particle counts [100 ml] 5-15µm = 165400, 15-25µm = 2000, 25-50µm = 400, 50-100µm = 0, >100µm = 0. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

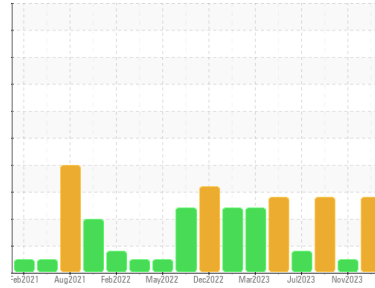

FUEL



Machine Id
827036-1040

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition. (Customer Sample Comment: Sampled oil)

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of fuel present in the oil.

▲ Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0110305	GFL0102796	GFL0090528
Sample Date	Client Info		05 Mar 2024	30 Nov 2023	10 Oct 2023
Machine Age	hrs	Client Info	14437	14196	13910
Oil Age	hrs	Client Info	241	286	580
Oil Changed	Client Info		Not Chngd	Not Chngd	Changed
Sample Status			SEVERE	NORMAL	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	47	2	15
Chromium	ppm	ASTM D5185m >5	2	<1	1
Nickel	ppm	ASTM D5185m >2	<1	<1	<1
Titanium	ppm	ASTM D5185m	<1	0	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >30	3	1	1
Lead	ppm	ASTM D5185m >30	<1	<1	<1
Copper	ppm	ASTM D5185m >150	3	0	<1
Tin	ppm	ASTM D5185m >5	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	3	8	2
Barium	ppm	ASTM D5185m 0	<1	0	3
Molybdenum	ppm	ASTM D5185m 60	49	59	48
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	732	918	701
Calcium	ppm	ASTM D5185m 1070	894	1070	833
Phosphorus	ppm	ASTM D5185m 1150	788	1086	803
Zinc	ppm	ASTM D5185m 1270	998	1284	943
Sulfur	ppm	ASTM D5185m 2060	2396	3261	2275

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	15	2	7
Sodium	ppm	ASTM D5185m	6	1	3
Potassium	ppm	ASTM D5185m >20	2	<1	2
Fuel	%	ASTM D3524 >5	▲ 13.3	0.0	▲ 17.8

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.7	0.3	0.2
Nitration	Abs/cm	*ASTM D7624 >20	10.4	4.9	10.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.1	17.4	19.1

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.9	12.5	19.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.8	8.6	7.5







OIL ANALYSIS REPORT

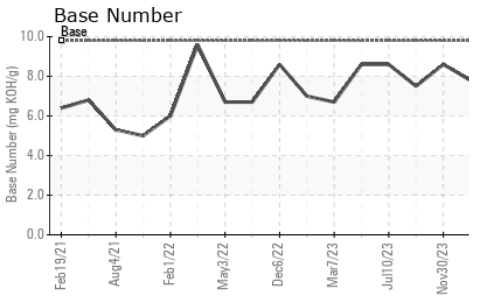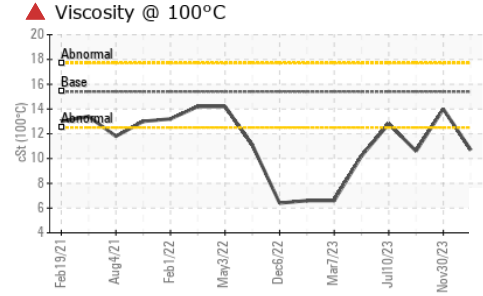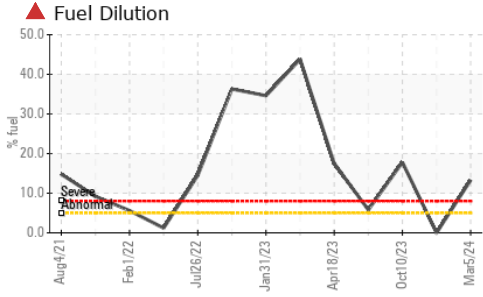

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 10.7	14.0	▲ 10.6

GRAPHS

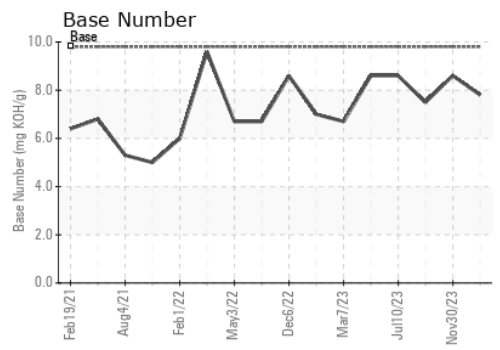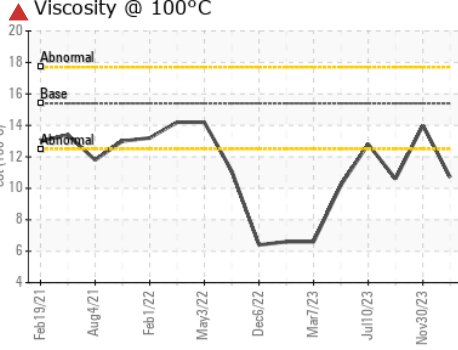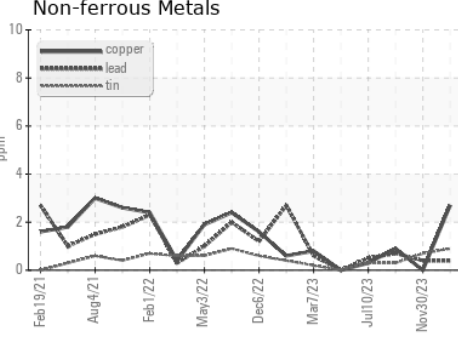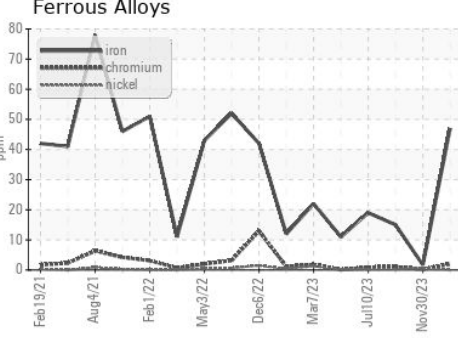

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0110305 **Received** : 08 Mar 2024
Lab Number : 06113445 **Tested** : 13 Mar 2024
Unique Number : 10916942 **Diagnosed** : 13 Mar 2024 - Jonathan Hester
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 622 - Traverse City Hauling
 160 Hughes Dr
 Traverse City, MI
 US 49686
 Contact: GARY BREWER

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: