




# OIL ANALYSIS REPORT

Sample Rating Trend

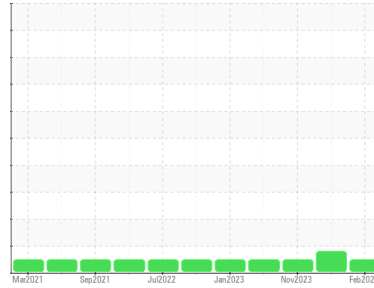

**NORMAL**



Machine Id  
**728018-1145**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 XLE 15W40 (5 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0096233</b>	GFL0096326	GFL0096278
Sample Date	Client Info		<b>04 Feb 2024</b>	27 Dec 2023	28 Nov 2023
Machine Age	hrs	Client Info	<b>14745</b>	14344	14164
Oil Age	hrs	Client Info	<b>14344</b>	12795	0
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>62</b>	▲ 85	63
Chromium	ppm	ASTM D5185m >5	<b>2</b>	2	1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>16</b>	11	11
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m >30	<b>8</b>	6	5
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	1	0
Copper	ppm	ASTM D5185m >150	<b>9</b>	23	22
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>114</b>	62	74
Barium	ppm	ASTM D5185m	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m	<b>63</b>	51	48
Manganese	ppm	ASTM D5185m	<b>1</b>	2	<1
Magnesium	ppm	ASTM D5185m	<b>942</b>	779	643
Calcium	ppm	ASTM D5185m	<b>1980</b>	1581	1411
Phosphorus	ppm	ASTM D5185m 760	<b>927</b>	781	642
Zinc	ppm	ASTM D5185m 830	<b>1091</b>	932	774
Sulfur	ppm	ASTM D5185m 2770	<b>4079</b>	3098	2860

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>19</b>	13	12
Sodium	ppm	ASTM D5185m	<b>17</b>	26	22
Potassium	ppm	ASTM D5185m >20	<b>8</b>	8	7

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.8</b>	1	1
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.9</b>	11.7	12.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.8</b>	23.9	23.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.1</b>	21.2	21.0
Base Number (BN)	mg KOH/g	ASTM D2896 10.7	<b>6.1</b>	6.9	7.4







# OIL ANALYSIS REPORT

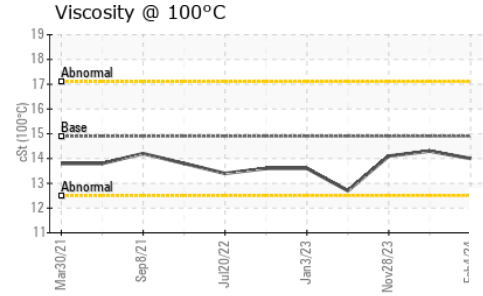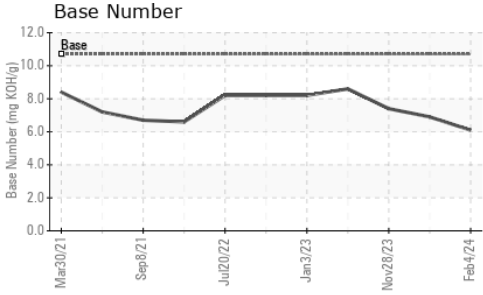

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.9	<b>14.0</b>	14.3	14.1

## GRAPHS

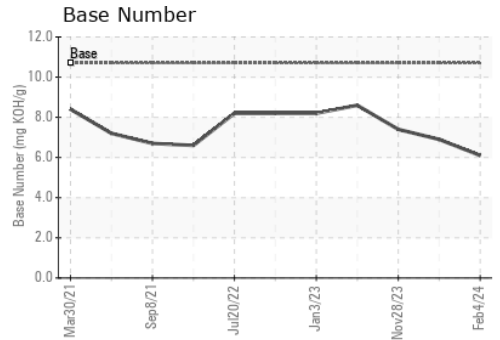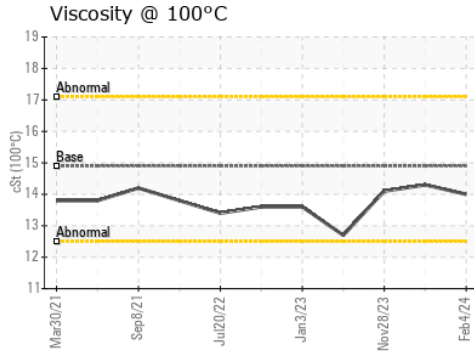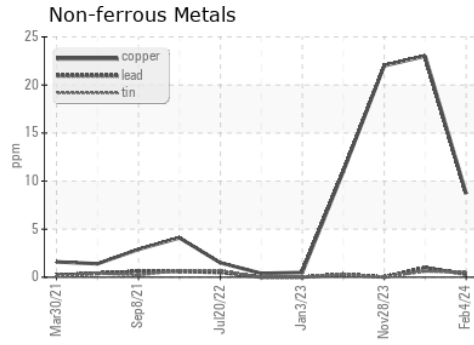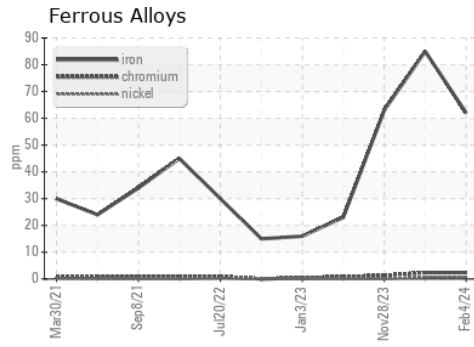

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0096233  
**Lab Number** : **06113456**  
**Unique Number** : 10916953  
**Test Package** : FLEET  
**Received** : 08 Mar 2024  
**Tested** : 11 Mar 2024  
**Diagnosed** : 12 Mar 2024 - Don Baldrige

**GFL Environmental - 624 - Elmira Hauling**  
 10164 M-32  
 Elmira, MI  
 US 49730  
 Contact: ANDY GROBASKI  
 andyg@americanwaste.org  
 T: (989)370-2941  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)