




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

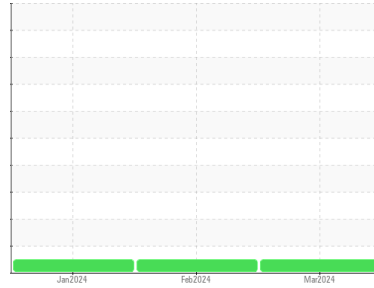

Machine Id
934033
 Component
Natural Gas Engine
 Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL011857	GFL0108283	GFL0108300
Sample Date	Client Info	07 Mar 2024	15 Feb 2024	30 Jan 2024
Machine Age	hrs	753	594	449
Oil Age	hrs	753	594	449
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	61	56	46
Chromium	ppm ASTM D5185m >4	2	1	<1
Nickel	ppm ASTM D5185m >2	2	2	1
Titanium	ppm ASTM D5185m	<1	<1	<1
Silver	ppm ASTM D5185m >3	<1	0	0
Aluminum	ppm ASTM D5185m >9	22	19	17
Lead	ppm ASTM D5185m >30	2	<1	<1
Copper	ppm ASTM D5185m >35	18	18	20
Tin	ppm ASTM D5185m >4	2	2	1
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	7	4	6
Barium	ppm ASTM D5185m	0	2	3
Molybdenum	ppm ASTM D5185m	61	51	58
Manganese	ppm ASTM D5185m	11	10	10
Magnesium	ppm ASTM D5185m	805	771	741
Calcium	ppm ASTM D5185m	1324	1161	1193
Phosphorus	ppm ASTM D5185m	778	683	653
Zinc	ppm ASTM D5185m	972	890	908
Sulfur	ppm ASTM D5185m	2490	2170	2249

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >+100	32	32	33
Sodium	ppm ASTM D5185m	5	4	<1
Potassium	ppm ASTM D5185m >20	50	46	43

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	0	0.3	0
Nitration	Abs/cm *ASTM D7624 >20	12.8	7.7	12.3
Sulfation	Abs/.1mm *ASTM D7415 >30	24.3	17.5	22.4

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	22.4	13.6	20.7
Base Number (BN)	mg KOH/g ASTM D2896	3.6	3.4	3.7







OIL ANALYSIS REPORT

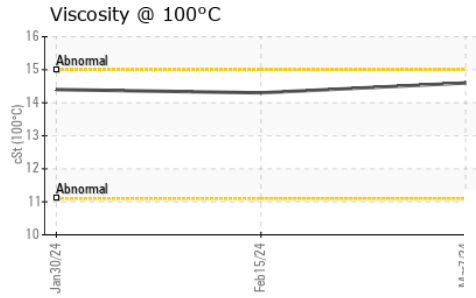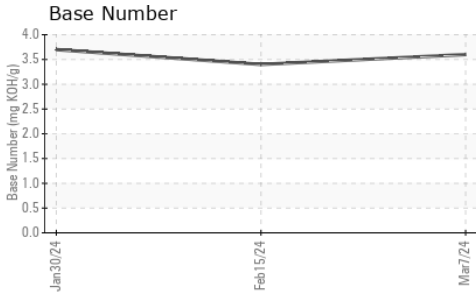

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.6	14.3	14.4

GRAPHS

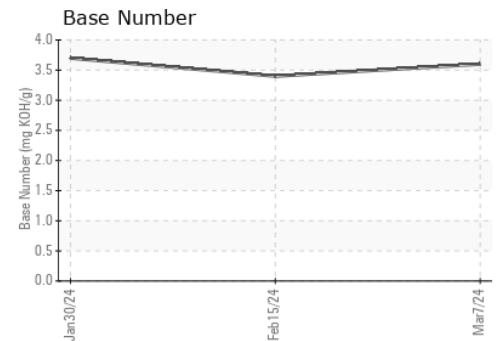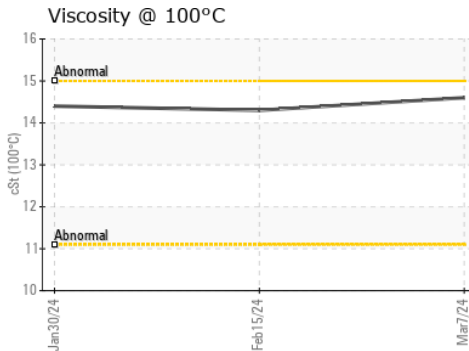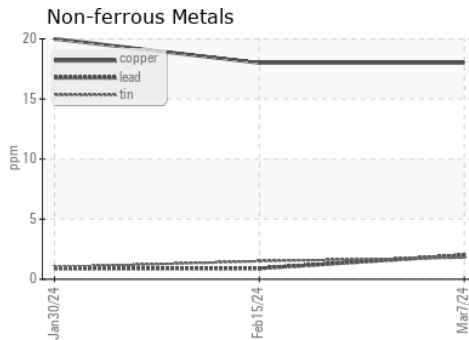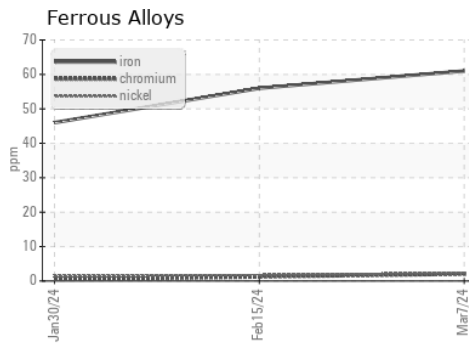

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0111857
 Lab Number : 06113488
 Unique Number : 10916985
 Test Package : FLEET

Received : 08 Mar 2024
 Tested : 11 Mar 2024
 Diagnosed : 11 Mar 2024 - Wes Davis

GFL Environmental - 652 - Fredericksburg Hauling
 10954 Houser Drive
 Fredericksburg, VA
 US 22408
 Contact: WILLIAM MILO
 wmiло@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: