




OIL ANALYSIS REPORT

Sample Rating Trend

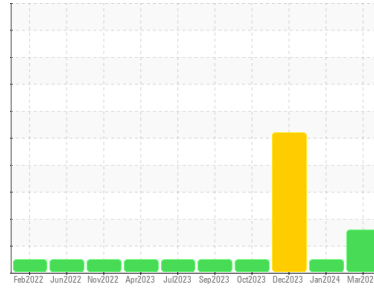

WEAR



Machine Id
721054

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

Wear

Piston, ring and cylinder wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | GFL0111861 | GFL0098172 | GFL0098228 |
| Sample Date | Client Info | 07 Mar 2024 | 12 Jan 2024 | 26 Dec 2023 |
| Machine Age | hrs | 7861 | 7615 | 7400 |
| Oil Age | hrs | 1776 | 1745 | 2014 |
| Oil Changed | Client Info | Not Chngd | N/A | N/A |
| Sample Status | | ABNORMAL | NORMAL | SEVERE |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|----------------|----------------|----------|----------|
| Fuel | WC Method >5 | <1.0 | <1.0 | <1.0 |
| Water | WC Method >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | NEG | NEG | NEG |

WEAR METALS

| method | limit/base | current | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron | ppm ASTM D5185m >100 | ▲ 183 | 71 | ▲ 156 |
| Chromium | ppm ASTM D5185m >20 | 8 | 2 | 8 |
| Nickel | ppm ASTM D5185m >4 | 3 | 1 | 3 |
| Titanium | ppm ASTM D5185m | <1 | 0 | <1 |
| Silver | ppm ASTM D5185m >3 | <1 | <1 | 0 |
| Aluminum | ppm ASTM D5185m >20 | ▲ 24 | 6 | ▲ 22 |
| Lead | ppm ASTM D5185m >40 | <1 | <1 | 0 |
| Copper | ppm ASTM D5185m >330 | 4 | 1 | 4 |
| Tin | ppm ASTM D5185m >15 | <1 | <1 | <1 |
| Vanadium | ppm ASTM D5185m | <1 | 0 | <1 |
| Cadmium | ppm ASTM D5185m | <1 | 0 | 0 |

ADDITIVES

| method | limit/base | current | history1 | history2 |
|------------|----------------------|-------------|----------|----------|
| Boron | ppm ASTM D5185m 250 | 5 | 8 | 5 |
| Barium | ppm ASTM D5185m 10 | 0 | 0 | 0 |
| Molybdenum | ppm ASTM D5185m 100 | 58 | 52 | 58 |
| Manganese | ppm ASTM D5185m | 2 | <1 | 2 |
| Magnesium | ppm ASTM D5185m 450 | 877 | 854 | 910 |
| Calcium | ppm ASTM D5185m 3000 | 1058 | 981 | 1014 |
| Phosphorus | ppm ASTM D5185m 1150 | 948 | 1020 | 956 |
| Zinc | ppm ASTM D5185m 1350 | 1142 | 1175 | 1177 |
| Sulfur | ppm ASTM D5185m 4250 | 2781 | 2898 | 2627 |

CONTAMINANTS

| method | limit/base | current | history1 | history2 |
|-----------|----------------------|-----------|----------|----------|
| Silicon | ppm ASTM D5185m >25 | 11 | 5 | 9 |
| Sodium | ppm ASTM D5185m >216 | 7 | 4 | 7 |
| Potassium | ppm ASTM D5185m >20 | 10 | 2 | 3 |

INFRA-RED

| method | limit/base | current | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot % | % *ASTM D7844 >3 | 2.4 | 1.8 | ▲ 8.2 |
| Nitration | Abs/cm *ASTM D7624 >20 | 13.9 | 8.3 | 25.4 |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | 26.3 | 21.0 | 40.4 |


FLUID DEGRADATION

| method | limit/base | current | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation | Abs/.1mm *ASTM D7414 >25 | 27.3 | 15.0 | 52.9 |
| Base Number (BN) | mg KOH/g ASTM D2896 8.5 | 7.0 | 8.9 | ▲ 0.0 |




OIL ANALYSIS REPORT


▲ Aluminum (ppm)

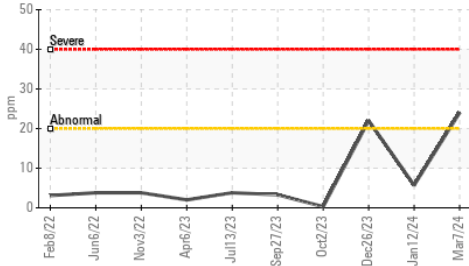


▲ Aluminum (ppm)

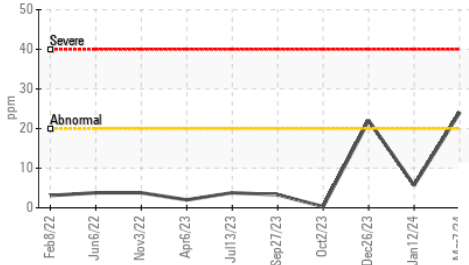

Base Number

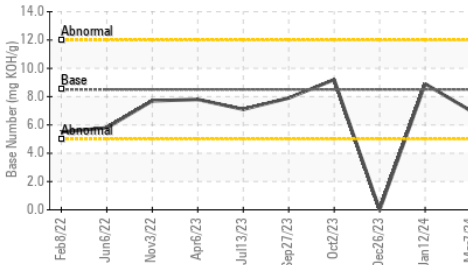

Viscosity @ 100°C

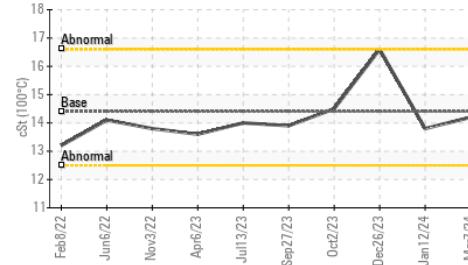


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|-------------|
| Visc @ 100°C | cSt | ASTM D445 | 14.4 | 14.2 | 13.8 ▲ 16.6 |

GRAPHS


▲ Ferrous Alloys

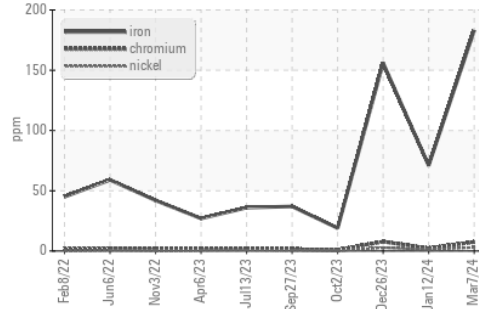


Non-ferrous Metals

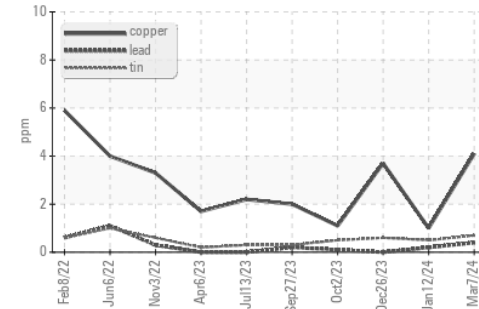

Viscosity @ 100°C

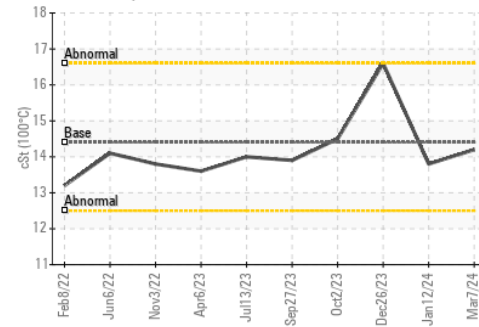

Base Number

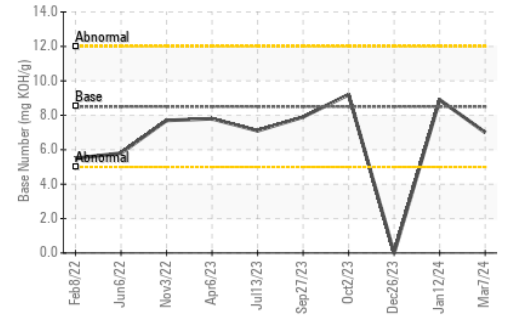

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0111861
 Lab Number : 06113493
 Unique Number : 10916990
 Test Package : FLEET

Received : 08 Mar 2024
 Tested : 11 Mar 2024
 Diagnosed : 12 Mar 2024 - Don Baldrige

GFL Environmental - 652 - Fredericksburg Hauling
 10954 Houser Drive
 Fredericksburg, VA
 US 22408
 Contact: WILLIAM MILO
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: