




# OIL ANALYSIS REPORT

Sample Rating Trend

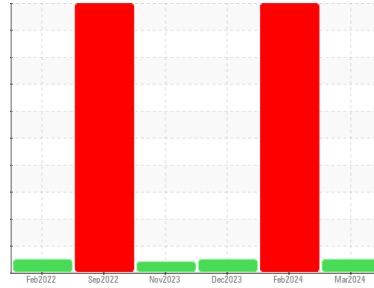

**NORMAL**



Machine Id  
**769M**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (36 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

No evidence of coolant present in the oil. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0104246</b>  | GFL0110158  | GFL0104142  |
| Sample Date   | Client Info |             | <b>07 Mar 2024</b> | 06 Feb 2024 | 15 Dec 2023 |
| Machine Age   | hrs         | Client Info | <b>10564</b>       | 10563       | 121809      |
| Oil Age       | hrs         | Client Info | <b>300</b>         | 600         | 121809      |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Changed     | N/A         |
| Sample Status |             |             | <b>NORMAL</b>      | SEVERE      | NORMAL      |

## CONTAMINATION

|       | method    | limit/base | current        | history1 | history2 |
|-------|-----------|------------|----------------|----------|----------|
| Fuel  | WC Method | >3.0       | <b>&lt;1.0</b> | <1.0     | <1.0     |
| Water | WC Method | >0.2       | <b>NEG</b>     | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base  | current | history1     | history2 |    |
|----------|--------|-------------|---------|--------------|----------|----|
| Iron     | ppm    | ASTM D5185m | >75     | <b>11</b>    | 38       | 11 |
| Chromium | ppm    | ASTM D5185m | >5      | <b>0</b>     | 2        | <1 |
| Nickel   | ppm    | ASTM D5185m | >4      | <b>0</b>     | 0        | 0  |
| Titanium | ppm    | ASTM D5185m | >2      | <b>0</b>     | 0        | 0  |
| Silver   | ppm    | ASTM D5185m | >2      | <b>0</b>     | 0        | 0  |
| Aluminum | ppm    | ASTM D5185m | >15     | <b>&lt;1</b> | 7        | 2  |
| Lead     | ppm    | ASTM D5185m | >25     | <b>0</b>     | 5        | 0  |
| Copper   | ppm    | ASTM D5185m | >100    | <b>0</b>     | 2        | <1 |
| Tin      | ppm    | ASTM D5185m | >4      | <b>0</b>     | <1       | <1 |
| Vanadium | ppm    | ASTM D5185m |         | <b>0</b>     | 0        | <1 |
| Cadmium  | ppm    | ASTM D5185m |         | <b>0</b>     | 0        | <1 |

## ADDITIVES

|            | method | limit/base  | current | history1    | history2 |      |
|------------|--------|-------------|---------|-------------|----------|------|
| Boron      | ppm    | ASTM D5185m | 0       | <b>0</b>    | 29       | 0    |
| Barium     | ppm    | ASTM D5185m | 0       | <b>0</b>    | 0        | 0    |
| Molybdenum | ppm    | ASTM D5185m | 60      | <b>56</b>   | 101      | 62   |
| Manganese  | ppm    | ASTM D5185m | 0       | <b>0</b>    | <1       | 0    |
| Magnesium  | ppm    | ASTM D5185m | 1010    | <b>862</b>  | 780      | 1058 |
| Calcium    | ppm    | ASTM D5185m | 1070    | <b>933</b>  | 911      | 1146 |
| Phosphorus | ppm    | ASTM D5185m | 1150    | <b>788</b>  | 793      | 1147 |
| Zinc       | ppm    | ASTM D5185m | 1270    | <b>1053</b> | 1104     | 1384 |
| Sulfur     | ppm    | ASTM D5185m | 2060    | <b>2438</b> | 2528     | 3517 |

## CONTAMINANTS

|           | method | limit/base  | current | history1   | history2 |     |
|-----------|--------|-------------|---------|------------|----------|-----|
| Silicon   | ppm    | ASTM D5185m | >25     | <b>3</b>   | ▲ 33     | 6   |
| Sodium    | ppm    | ASTM D5185m |         | <b>10</b>  | ▲ 1502   | 3   |
| Potassium | ppm    | ASTM D5185m | >20     | <b>0</b>   | ▲ 34     | 2   |
| Glycol    | %      | *ASTM D2982 |         | <b>NEG</b> | ▲ 0.10   | NEG |

## INFRA-RED

|           | method   | limit/base  | current | history1    | history2 |      |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot %    | %        | *ASTM D7844 | >6      | <b>0.3</b>  | 0.6      | 0.2  |
| Nitration | Abs/cm   | *ASTM D7624 | >20     | <b>7.9</b>  | 12.9     | 6.8  |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30     | <b>19.0</b> | 23.5     | 18.4 |


## FLUID DEGRADATION

|                  | method   | limit/base  | current | history1    | history2 |      |
|------------------|----------|-------------|---------|-------------|----------|------|
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25     | <b>15.6</b> | 20.4     | 14.8 |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 9.8     | <b>8.1</b>  | 8.3      | 8.9  |




# OIL ANALYSIS REPORT


Glycol Contamination

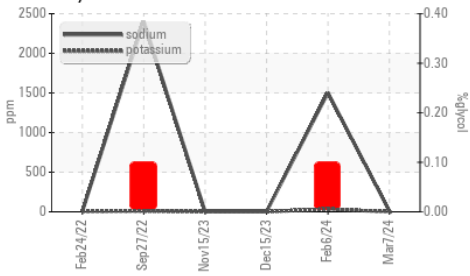

Viscosity @ 100°C

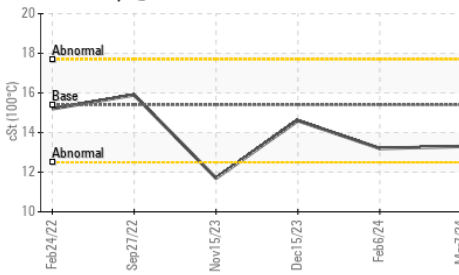

Glycol Contamination

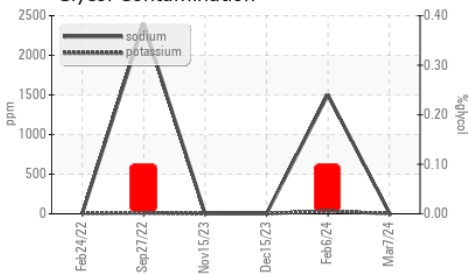


| PARAMETER        | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |


| PARAMETER    | method | limit/base | current | history1 | history2 |
|--------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt    | ASTM D445  | 15.4    | 13.3     | 13.2     |

## GRAPHS


Ferrous Alloys

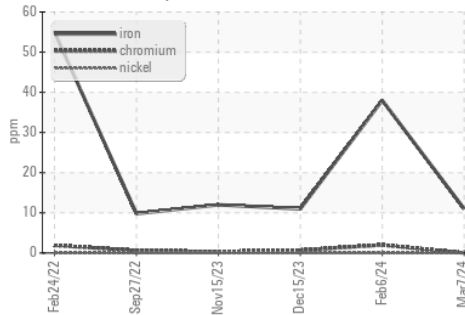


Non-ferrous Metals

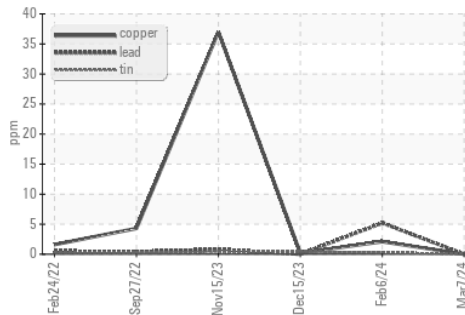

Viscosity @ 100°C

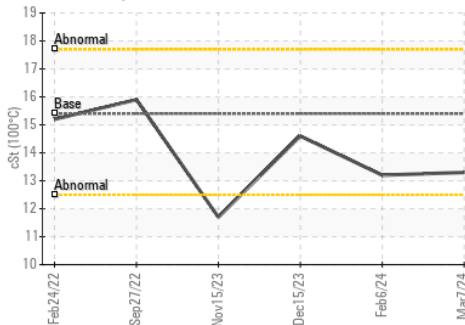

Base Number

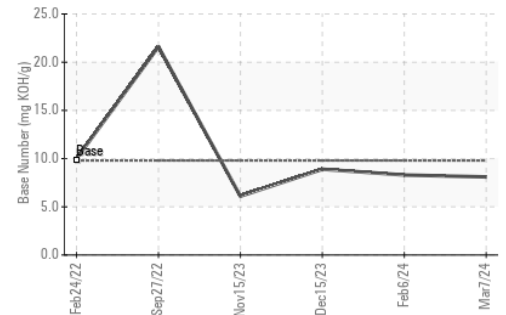

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0104246  
 Lab Number : 06113866  
 Unique Number : 10922699  
 Test Package : FLEET

Received : 11 Mar 2024  
 Tested : 13 Mar 2024  
 Diagnosed : 13 Mar 2024 - Jonathan Hester

GFL Environmental - 410 - Michigan West  
 39000 Van Born Rd  
 Wayne, MI  
 US 48184

Contact: Belal Dgheish  
 bdgheish@gflenv.com

T: (734)714-2340

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)