


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**


Area  
**(P1184215) Preferred Service-Tractor**  
 Machine Id  
**[Preferred Service-Tractor] 192A32026B**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON UHP 5W30 (11 GAL)**

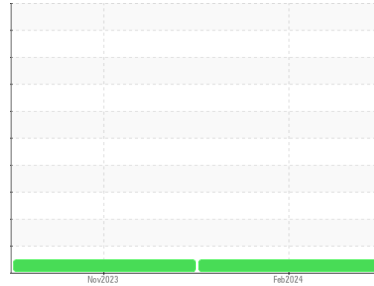

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0116675</b>	PCA0109412	---
Sample Date	Client Info		<b>22 Feb 2024</b>	04 Nov 2023	---
Machine Age	mls	Client Info	<b>40396</b>	25787	---
Oil Age	mls	Client Info	<b>25787</b>	13245	---
Oil Changed	Client Info		<b>Changed</b>	Not Changd	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	0.0	---

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>100	<b>48</b>	25	---
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	---
Nickel	ppm	ASTM D5185m	>2	<b>2</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	2	---
Aluminum	ppm	ASTM D5185m	>25	<b>15</b>	11	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>269</b>	360	---
Tin	ppm	ASTM D5185m	>15	<b>4</b>	2	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<b>14</b>	24	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	64	<b>65</b>	66	---
Manganese	ppm	ASTM D5185m	0	<b>2</b>	1	---
Magnesium	ppm	ASTM D5185m	1160	<b>1101</b>	1029	---
Calcium	ppm	ASTM D5185m	820	<b>936</b>	894	---
Phosphorus	ppm	ASTM D5185m	1160	<b>1058</b>	937	---
Zinc	ppm	ASTM D5185m	1260	<b>1283</b>	1212	---
Sulfur	ppm	ASTM D5185m	3000	<b>3271</b>	3104	---

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>17</b>	21	---
Sodium	ppm	ASTM D5185m		<b>5</b>	3	---
Potassium	ppm	ASTM D5185m	>20	<b>57</b>	46	---



## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.1</b>	10.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.3</b>	22.7	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>22.6</b>	20.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	11.0	<b>6.2</b>	7.5	---





# OIL ANALYSIS REPORT

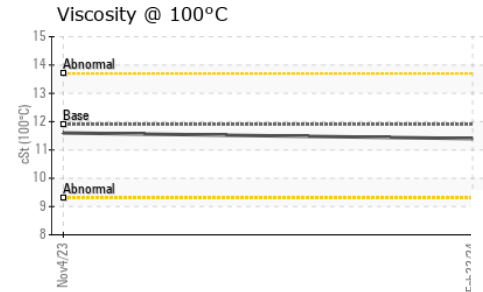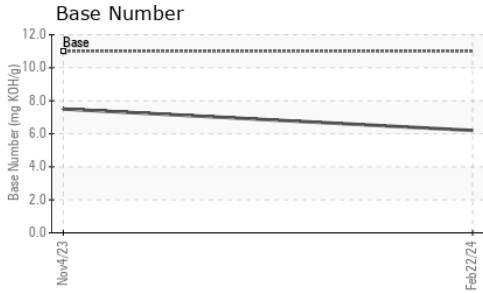

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.9	<b>11.4</b>	11.6

## GRAPHS

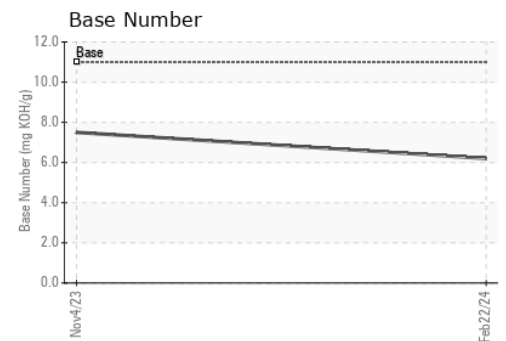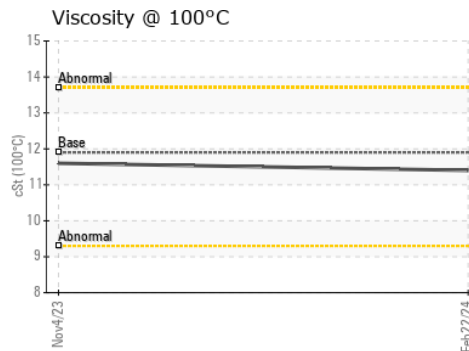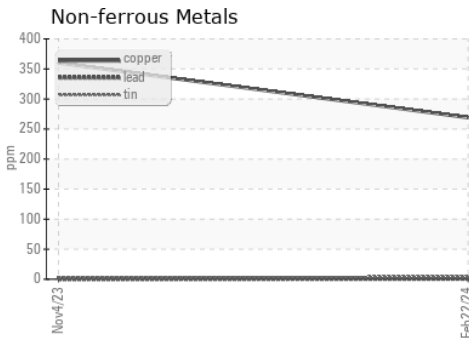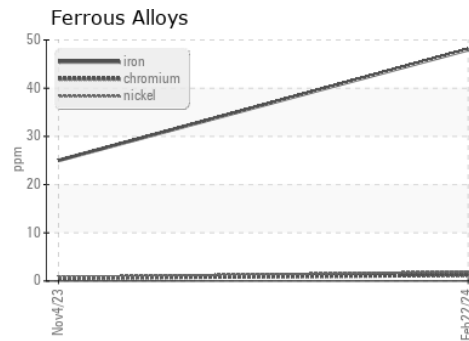

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0116675  
**Lab Number** : **06114025**  
**Unique Number** : 10922858  
**Test Package** : FLEET

**Received** : 11 Mar 2024  
**Tested** : 12 Mar 2024  
**Diagnosed** : 12 Mar 2024 - Wes Davis

**Transervice - Shop 1920 - Preferred Service**  
 1955 W. North Avenue, Bldg K  
 Melrose Park, IL  
 US 60160  
 Contact: Tom Lindeman  
 tlindemann@transervice.com  
 T: (630)376-8946  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)