


# **OIL ANALYSIS REPORT**

# (P1184216) Preferred Service-Tractor [Preferred Service-Tractor] 192A32027B

**Diesel Engine** 

PETRO CANADA DURON UHP 5W30 (36 QTS)





### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


#### **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sample Date Client Info 22 Feb 2024 30 Oct 2023	
Sample Date Client Info 22 Feb 2024 30 Oct 2023	history2
Sample Date Client Info 22 Feb 2024 30 Oct 2023	
Machine Age mls Client Info 53365 35258	
Oil Changed Client Info Changed Not Changed	
Sample Status NORMAL NORMAL	
CONTAMINATION method limit/base current history1	history2
Fuel WC Method >6.0 <1.0 <1.0	
Water WC Method >0.2 NEG NEG	
Glycol WC Method NEG NEG	
WEAR METALS method limit/base current history1	history2
Iron ppm ASTM D5185m >100 <b>66</b> 26	
Chromium         ppm         ASTM D5185m         >20         2         <1	
<b>Nickel</b> ppm ASTM D5185m >2 <b>2</b> <1	
Titanium ppm ASTM D5185m <1 <1	
Silver ppm ASTM D5185m >2 <1 <1	
<b>Aluminum</b> ppm ASTM D5185m >25 <b>16</b> 10	
<b>Lead</b> ppm ASTM D5185m >40 <b>&lt;1</b> 0	
Copper         ppm         ASTM D5185m         >330         160         136	
Tin ppm ASTM D5185m >15 <b>5</b> 2	
Vanadium ppm ASTM D5185m <1 0	
Cadmium ppm ASTM D5185m <1 0	
ADDITIVES method limit/base current history1	history2
<b>Boron</b> ppm ASTM D5185m 0 <b>12</b> 20	
Boron         ppm         ASTM D5185m         0         12         20           Barium         ppm         ASTM D5185m         0         0         0	
Barium         ppm         ASTM D5185m         0         0         0	
Barium         ppm         ASTM D5185m         0         0         0           Molybdenum         ppm         ASTM D5185m         64         66         63	
Barium         ppm         ASTM D5185m         0         0         0           Molybdenum         ppm         ASTM D5185m         64         66         63           Manganese         ppm         ASTM D5185m         0         2         <1	
Barium         ppm         ASTM D5185m         0         0         0           Molybdenum         ppm         ASTM D5185m         64         66         63           Manganese         ppm         ASTM D5185m         0         2         <1	
Barium         ppm         ASTM D5185m         0         0         0           Molybdenum         ppm         ASTM D5185m         64         66         63           Manganese         ppm         ASTM D5185m         0         2         <1	
Barium         ppm         ASTM D5185m         0         0         0           Molybdenum         ppm         ASTM D5185m         64         66         63           Manganese         ppm         ASTM D5185m         0         2         <1	
Barium         ppm         ASTM D5185m         0         0         0           Molybdenum         ppm         ASTM D5185m         64         66         63           Manganese         ppm         ASTM D5185m         0         2         <1	
Barium         ppm         ASTM D5185m         0         0         0           Molybdenum         ppm         ASTM D5185m         64         66         63           Manganese         ppm         ASTM D5185m         0         2         <1	
Barium         ppm         ASTM D5185m         0         0         0           Molybdenum         ppm         ASTM D5185m         64         66         63           Manganese         ppm         ASTM D5185m         0         2         <1	
Barium         ppm         ASTM D5185m         0         0         0           Molybdenum         ppm         ASTM D5185m         64         66         63           Manganese         ppm         ASTM D5185m         0         2         <1	history2
Barium         ppm         ASTM D5185m         0         0         0           Molybdenum         ppm         ASTM D5185m         64         66         63           Manganese         ppm         ASTM D5185m         0         2         <1	history2
Barium         ppm         ASTM D5185m         0         0         0           Molybdenum         ppm         ASTM D5185m         64         66         63           Manganese         ppm         ASTM D5185m         0         2         <1	history2
Barium         ppm         ASTM D5185m         0         0         0           Molybdenum         ppm         ASTM D5185m         64         66         63           Manganese         ppm         ASTM D5185m         0         2         <1	history2 history2
Barium         ppm         ASTM D5185m         0         0         0           Molybdenum         ppm         ASTM D5185m         64         66         63           Manganese         ppm         ASTM D5185m         0         2         <1	history2 history2
Barium         ppm         ASTM D5185m         0         0         0           Molybdenum         ppm         ASTM D5185m         64         66         63           Manganese         ppm         ASTM D5185m         0         2         <1	history2 history2
Barium         ppm         ASTM D5185m         0         0         0           Molybdenum         ppm         ASTM D5185m         64         66         63           Manganese         ppm         ASTM D5185m         0         2         <1	history2 history2



## **OIL ANALYSIS REPORT**

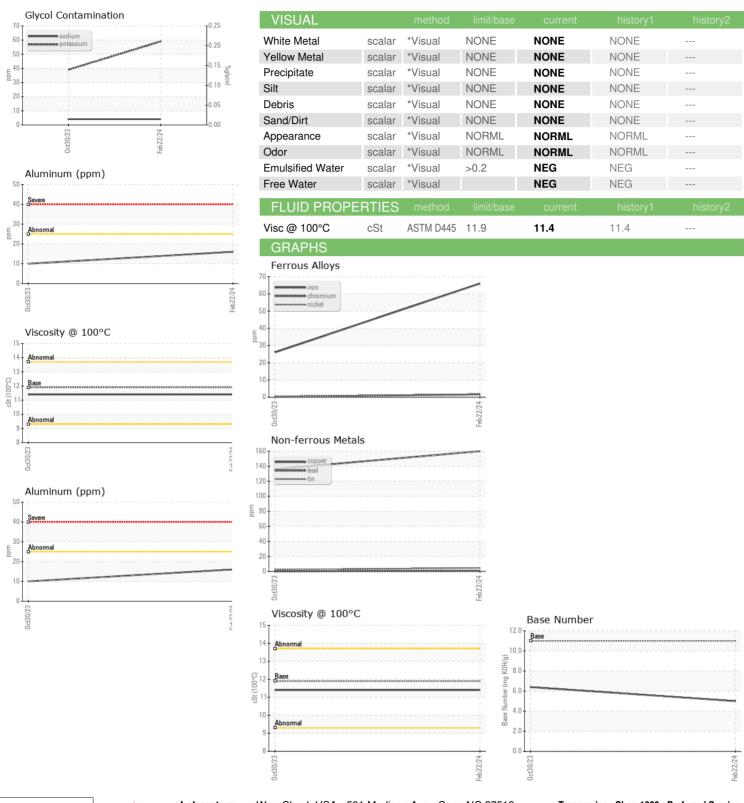





Certificate L2367

Laboratory Sample No.

Lab Number : 06114026 Unique Number: 10922859 Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0116694 Received : 11 Mar 2024 **Tested** : 12 Mar 2024

Diagnosed

: 12 Mar 2024 - Don Baldridge

Transervice - Shop 1920 - Preferred Service 1955 W. North Avenue, Bldg K Melrose Park, IL

US 60160 Contact: Tom Lindeman

tlindemann@transervice.com T: (630)376-8946

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)