

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
(P798242) Preferred Service-Tractor
 Machine Id
[Preferred Service-Tractor] 192A01750
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (36 QTS)

DIAGNOSIS

Recommendation
 Resample at the next service interval to monitor.

Wear
 Metal levels are typical for a new component breaking in.

Contamination
 There is no indication of any contamination in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0116697	---	---
Sample Date	Client Info		17 Feb 2024	---	---
Machine Age	mls	Client Info	406482	---	---
Oil Age	mls	Client Info	24497	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	22	---	---
Chromium	ppm	ASTM D5185m >20	<1	---	---
Nickel	ppm	ASTM D5185m >2	<1	---	---
Titanium	ppm	ASTM D5185m	<1	---	---
Silver	ppm	ASTM D5185m >2	<1	---	---
Aluminum	ppm	ASTM D5185m >25	4	---	---
Lead	ppm	ASTM D5185m >40	2	---	---
Copper	ppm	ASTM D5185m >330	7	---	---
Tin	ppm	ASTM D5185m >15	1	---	---
Vanadium	ppm	ASTM D5185m	<1	---	---
Cadmium	ppm	ASTM D5185m	<1	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	8	---	---
Barium	ppm	ASTM D5185m 0	0	---	---
Molybdenum	ppm	ASTM D5185m 50	65	---	---
Manganese	ppm	ASTM D5185m 0	<1	---	---
Magnesium	ppm	ASTM D5185m 950	993	---	---
Calcium	ppm	ASTM D5185m 1050	1123	---	---
Phosphorus	ppm	ASTM D5185m 995	1108	---	---
Zinc	ppm	ASTM D5185m 1180	1278	---	---
Sulfur	ppm	ASTM D5185m 2600	3223	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	---	---
Sodium	ppm	ASTM D5185m	3	---	---
Potassium	ppm	ASTM D5185m >20	5	---	---



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.9	---	---
Nitration	Abs/cm	*ASTM D7624 >20	9.1	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.0	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	17.0	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	6.7	---	---





OIL ANALYSIS REPORT

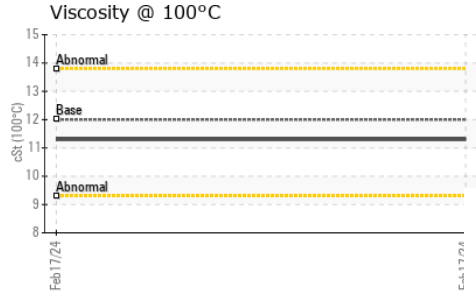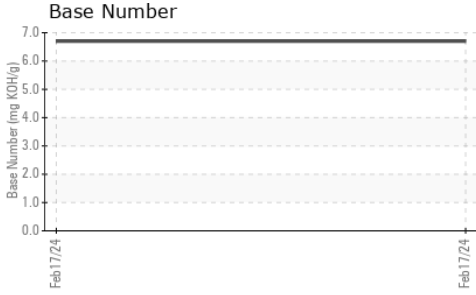

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	11.3	---	---

GRAPHS

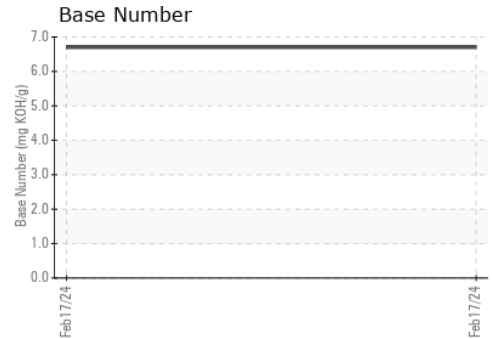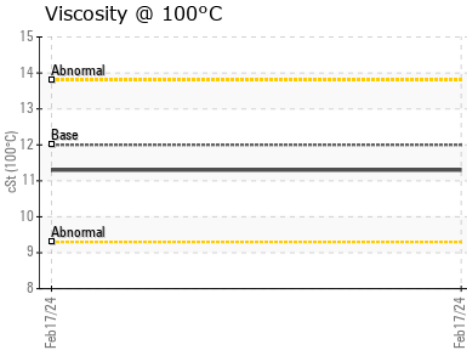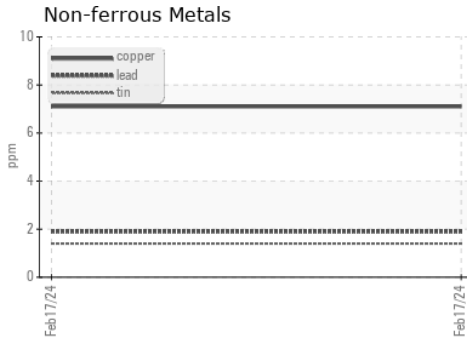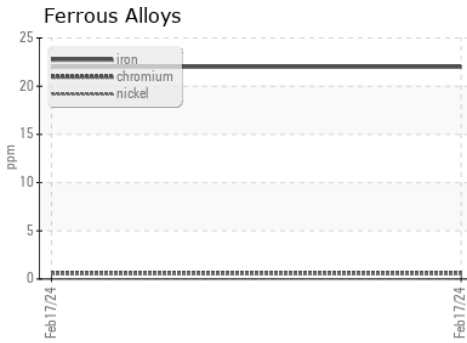

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0116697
Lab Number : 06114030
Unique Number : 10922863
Test Package : FLEET

Received : 11 Mar 2024
Tested : 12 Mar 2024
Diagnosed : 12 Mar 2024 - Wes Davis

Transervice - Shop 1920 - Preferred Service
 1955 W. North Avenue, Bldg K
 Melrose Park, IL
 US 60160
 Contact: Tom Lindeman
 tlindemann@transervice.com
 T: (630)376-8946
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)