

(P1184785) Preferred Service [Preferred Service-Tractor] 1 Component

Diesel Engine

PETRO CANADA DURON UHP 5W30 (36 QTS)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

ce-Tracto 192A320	-					
192A320	230					V
•				Feb 2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0116690		
Sample Date		Client Info		19 Feb 2024		
Machine Age	mls	Client Info Client Info		60257		
Oil Age Oil Changed	mls	Client Info		39405 Changed		
Sample Status				NORMAL		
			11 11 11	-		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel			>6.0	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	.S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	76		
Chromium	ppm	ASTM D5185m	>20	2		
Nickel	ppm	ASTM D5185m	>2	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>2	<1		
Aluminum	ppm	ASTM D5185m	>25	24		
Lead	ppm	ASTM D5185m	>40	1		
Copper Tin	ppm	ASTM D5185m ASTM D5185m	>330 >15	125 4		
Vanadium	ppm ppm	ASTM D5185m	>10	4 <1		
Cadmium	ppm	ASTM D5185m		<1		
	le le				la i a ta mut	la i ata muQ
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	12		
Barium	ppm	ASTM D5185m	0	0		
Molybdenum Manganese	ppm ppm	ASTM D5185m ASTM D5185m	64 0	66 2		
Magnesium	ppm	ASTM D5185m	1160	1123		
Calcium	ppm	ASTM D5185m	820	934		
Phosphorus	ppm	ASTM D5185m	1160	1066		
Zinc	ppm	ASTM D5185m	1260	1256		
Sulfur	ppm	ASTM D5185m	3000	3102		
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	15		
Sodium	ppm	ASTM D5185m	-	4		
Potassium	ppm	ASTM D5185m	>20	78		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1		
Nitration	Abs/cm	*ASTM D7624	>20	11.8		
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.6		
FLUID DEGRA			limit/base		history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.2		
Base Number (BN)	mg KOH/g	ASTM D2896	11.0	4.9		


Sample Rating Trend


NORMAL




OIL ANALYSIS REPORT


E 40





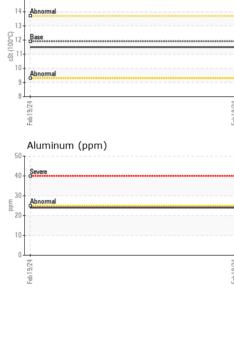

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.2	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	11.9	11.5		
GRAPHS						
Ferrous Alloys						
iron						
0 - nickel						
0-						
0						
0						
0-						
0-						
0 L						
Feb 19/24			Feb19/24			
⊥ Non-ferrous Metal			ι. Έ			
⁰ T :	15					
0 - copper						
0 -						
0-						
0						
0						
0						
24 to 0			9/24			
Feb 19/24			Feb19/			
Viscosity @ 100°C						
5T			12.0	Base Number		
4 - Abnormal				Base		
3			10.0 P			
2 Base			9.0 10 10			
			<u>لة</u> 5.0			
11-			6.0 Kokking Kokking Base Number			
Abnormal			ase			
9			2.0			
- 1 - i			0.0	L I		
84			- 52	54		4
∞ + +			Feb19/24	Feb19/24		Feh19/24

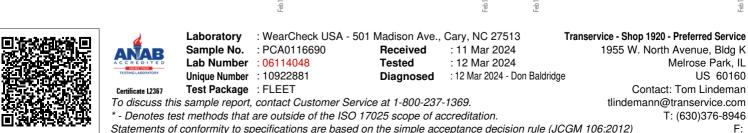

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)