




PROBLEM SUMMARY

Sample Rating Trend



FUEL



Area
(ML7015) 020
Machine Id
3425
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

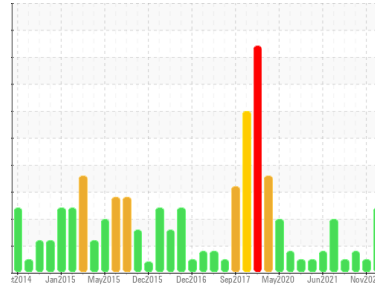

COMPONENT CONDITION SUMMARY

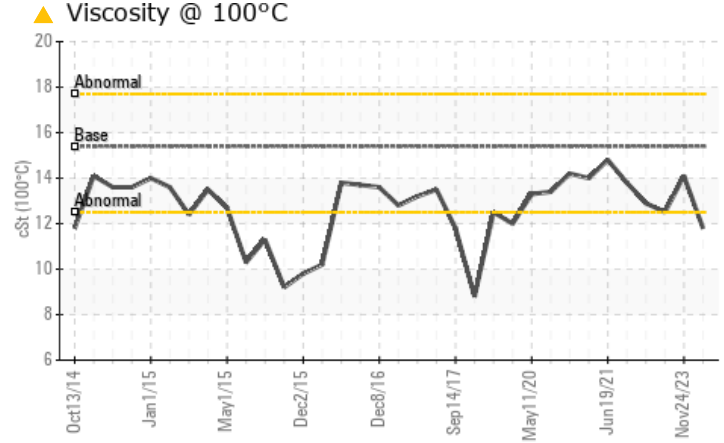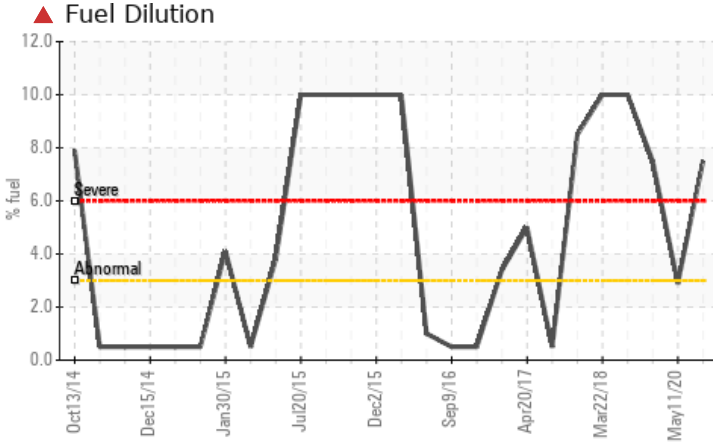

RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	NORMAL	ABNORMAL
Fuel	%	ASTM D3524	>3.0	▲ 7.5	<1.0	<1.0
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.8	14.1	12.5

Customer Id: GFL020
Sample No.: GFL0103779
Lab Number: 06114109
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	We recommend that you drain the oil from the component if this has not already been done.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

24 Nov 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



23 Jun 2023 Diag: Don Baldrige

WEAR



Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



09 Dec 2022 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

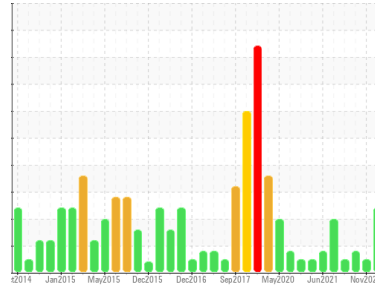

FUEL



Area (ML7015) 020

Machine Id 3425

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0103779	GFL0091163	GFL0061891
Sample Date	Client Info	07 Mar 2024	24 Nov 2023	23 Jun 2023
Machine Age	hrs	21013	20526	20164
Oil Age	hrs	690	690	20164
Oil Changed	Client Info	Not Chngd	Changed	Changed
Sample Status		SEVERE	NORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	48	19	▲ 85
Chromium	ppm ASTM D5185m >20	2	<1	3
Nickel	ppm ASTM D5185m >2	<1	0	<1
Titanium	ppm ASTM D5185m >2	2	0	0
Silver	ppm ASTM D5185m >2	<1	0	0
Aluminum	ppm ASTM D5185m >20	4	1	5
Lead	ppm ASTM D5185m >40	<1	0	1
Copper	ppm ASTM D5185m >330	23	3	3
Tin	ppm ASTM D5185m >15	2	<1	1
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	7	9	6
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	59	55	59
Manganese	ppm ASTM D5185m 0	<1	<1	1
Magnesium	ppm ASTM D5185m 1010	899	857	811
Calcium	ppm ASTM D5185m 1070	1100	982	1078
Phosphorus	ppm ASTM D5185m 1150	1053	983	922
Zinc	ppm ASTM D5185m 1270	1187	1162	1109
Sulfur	ppm ASTM D5185m 2060	3039	2903	2595

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	16	6	10
Sodium	ppm ASTM D5185m	25	60	6
Potassium	ppm ASTM D5185m >20	3	3	2
Fuel	% ASTM D3524 >3.0	▲ 7.5	<1.0	<1.0

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	1	0.2	2.4
Nitration	Abs/cm *ASTM D7624 >20	10.4	5.3	14.8
Sulfation	Abs/.1mm *ASTM D7415 >30	20.9	17.8	27.1

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	18.5	13.4	24.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.0	9.6	6.8







OIL ANALYSIS REPORT

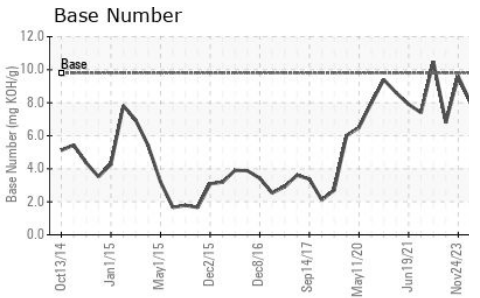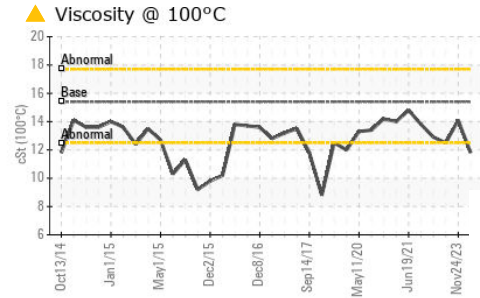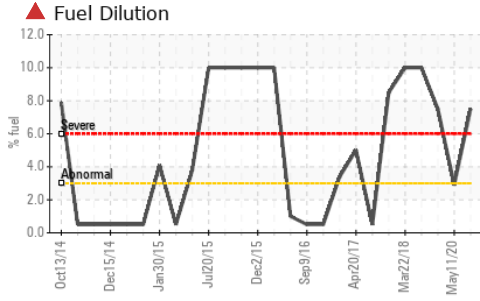

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.8	14.1

GRAPHS

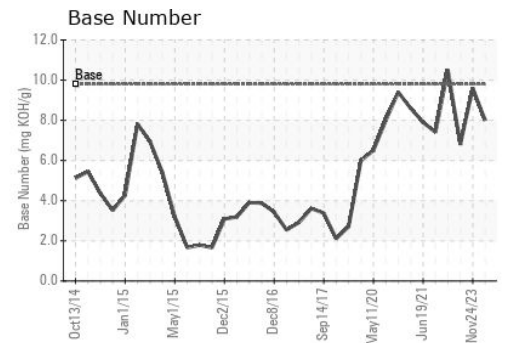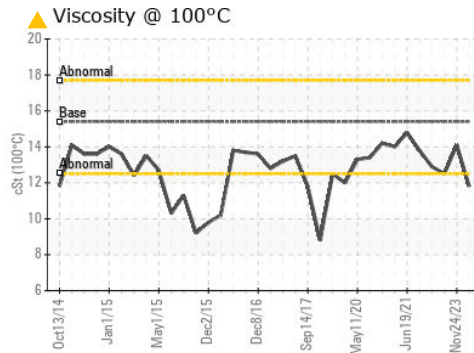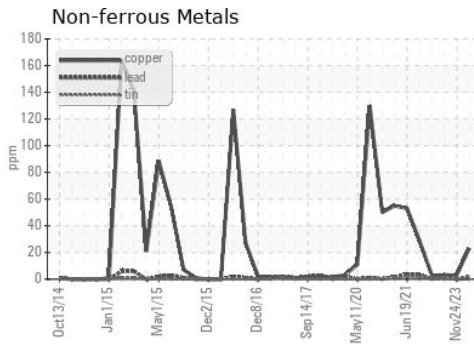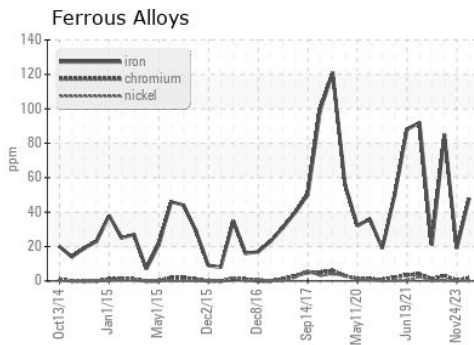

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0103779
 Lab Number : 06114109
 Unique Number : 10922942
 Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 020 - Alamance
 703 East Gilbreath St
 Graham, NC
 US 27253
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

richard.belcher@gflenv.com

T: (800)207-6618

F: (336)229-0526