

Base Number (BN) mg KOH/g ASTM D2896

(65370Z) Walgreens - Tractor [Walgreens - Tractor] 136A624198 Component

Diesel Engine

PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.






SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0103558		
Sample Date		Client Info		21 Feb 2024		
Machine Age	mls	Client Info		65688		
Oil Age	mls	Client Info		65688		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINATIO	NC	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METALS	;	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	69		
Chromium	ppm	ASTM D5185m	>5	5		
Nickel	ppm	ASTM D5185m	>2	1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>30	184		
Lead	ppm	ASTM D5185m	>30	2		
Copper	ppm	ASTM D5185m	>150	235		
Tin	ppm	ASTM D5185m	>5	6		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	18		
Barium	ppm	ASTM D5185m	0	<1		
Molybdenum	ppm	ASTM D5185m	50	36		
Manganese	ppm	ASTM D5185m	0	4		
Magnesium	ppm	ASTM D5185m	950	523		
Calcium	ppm	ASTM D5185m	1050	1590		
	ppm	ASTM D5185m	995	631		
Zinc	ppm	ASTM D5185m	1180	770		
Sulfur	ppm	ASTM D5185m	2600	1840		
CONTAMINANT	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	9		
Sodium	ppm	ASTM D5185m		8		
Potassium	ppm	ASTM D5185m	>20	413		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6		
Nitration	Abs/cm	*ASTM D7624	>20	12.9		
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.5		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	30.1		
Dese Nevel av (DNI)			. =•			

4.3




OIL ANALYSIS REPORT



Viscosity @ 100°C



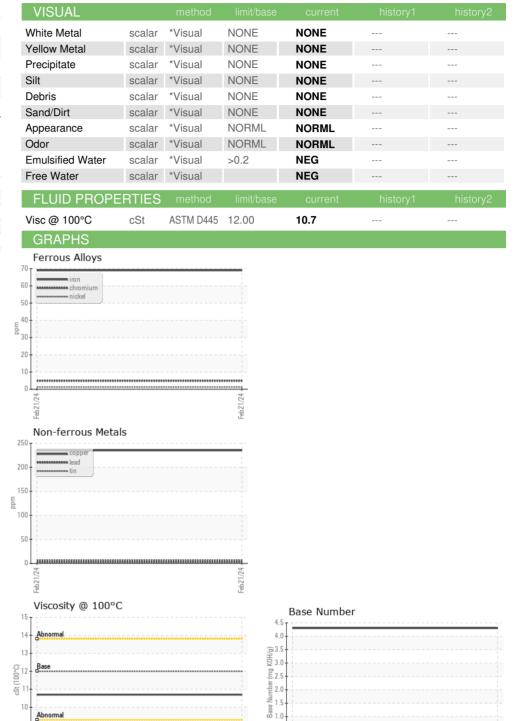

0.5 0.0

eb21/24

Feb21/24.

: 11 Mar 2024

: 12 Mar 2024



: 13 Mar 2024 - Jonathan Hester Unique Number : 10923663 Diagnosed Test Package : FLEET Contact: Robert Beal Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. rbeal@transervice.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (972)923-9928 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (972)923-9919

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Received

Tested

Abnorma

Feb21/24

: PCA0103558

Laboratory

Sample No.

Lab Number : 06114830

Transervice - Shop 1369 - Berkeley-Waxahachie

710 Ovilla Road

Waxahachie, TX

US 75167

Feb21/24