

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**


Area  
**G.LOPES CONSTRUCTION INC./ON-ROAD**  
 Machine Id  
**369**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**



## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

Metal levels are typical for a components first oil change.

### Contamination

Fuel content negligible. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0109541</b>	---	---
Sample Date	Client Info		<b>06 Mar 2024</b>	---	---
Machine Age	hrs	Client Info	<b>52000</b>	---	---
Oil Age	hrs	Client Info	<b>52000</b>	---	---
Oil Changed		Client Info	<b>N/A</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>29</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>3</b>	---	---
Nickel	ppm	ASTM D5185m >4	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>0</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>32</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>77</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	---	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m 60	<b>58</b>	---	---
Manganese	ppm	ASTM D5185m 0	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m 1010	<b>853</b>	---	---
Calcium	ppm	ASTM D5185m 1070	<b>1032</b>	---	---
Phosphorus	ppm	ASTM D5185m 1150	<b>879</b>	---	---
Zinc	ppm	ASTM D5185m 1270	<b>1017</b>	---	---
Sulfur	ppm	ASTM D5185m 2060	<b>2190</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	---	---
Sodium	ppm	ASTM D5185m	<b>3</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>71</b>	---	---
Fuel	%	ASTM D3524 >5	<b>0.5</b>	---	---





## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.7</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.3</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.6</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.65</b>	---	---









# OIL ANALYSIS REPORT

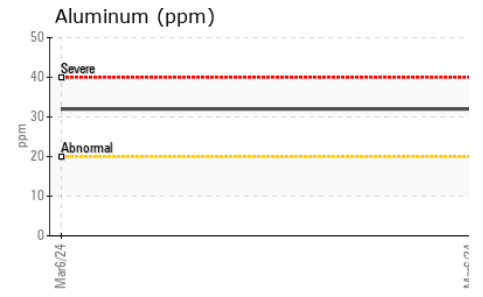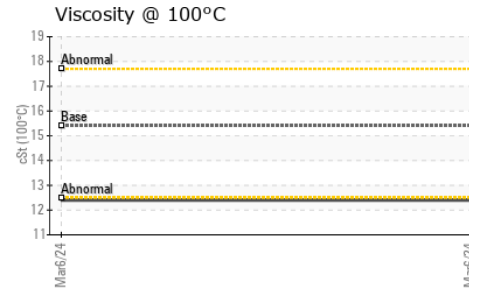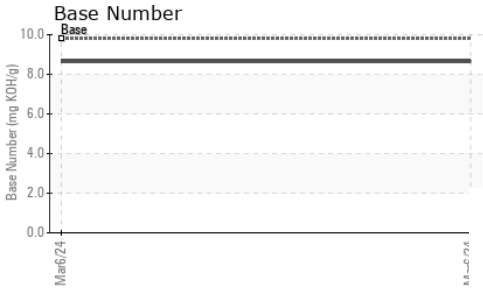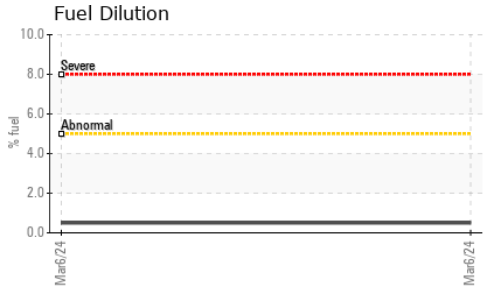

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.4	---

### GRAPHS

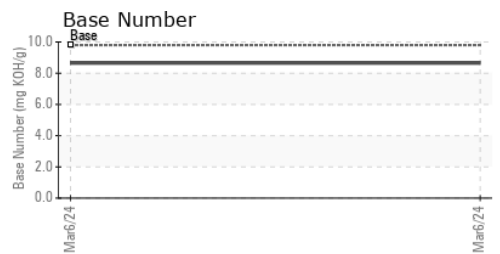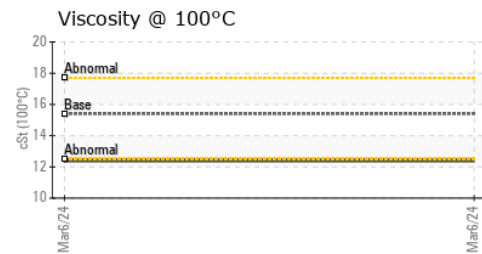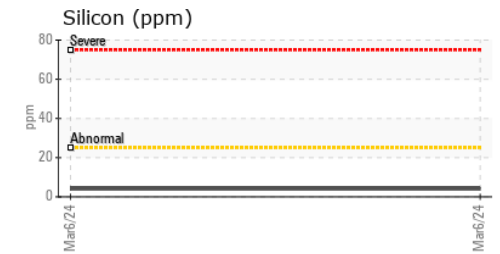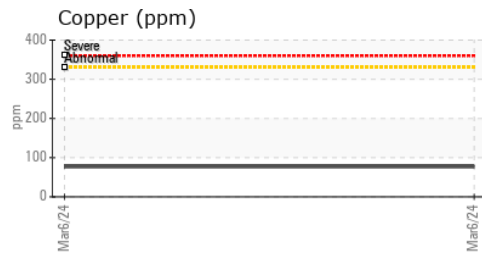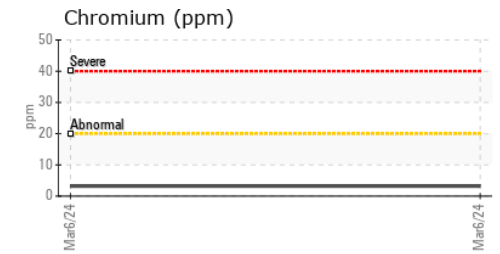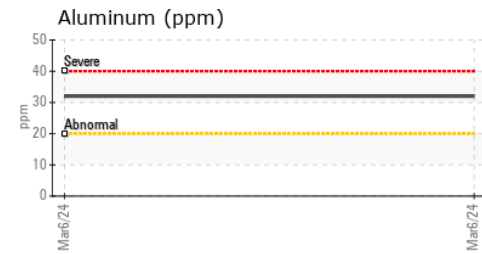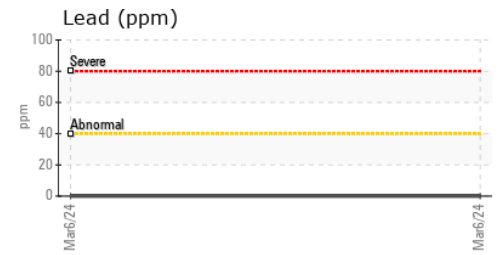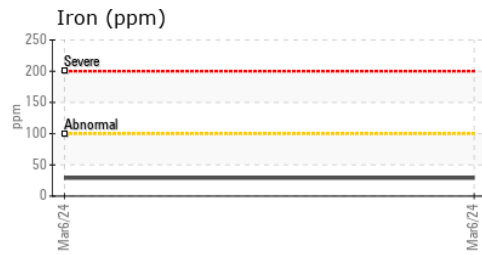

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0109541      **Received** : 11 Mar 2024  
**Lab Number** : 06115451      **Tested** : 13 Mar 2024  
**Unique Number** : 10924284      **Diagnosed** : 13 Mar 2024 - Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution, PercentFuel )

**G LOPES CONSTRUCTION**  
 565 WINTHROP ST  
 TAUNTON, MA  
 US 02780  
 Contact: BUTCH MCGRATH  
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)