


OIL ANALYSIS REPORT



Area
KEMP QUARRIES / KEMP STONE - FAIRLAND [68775]
Machine Id
WL086
Component
Front Differential
Fluid
PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)

Sample Rating Trend

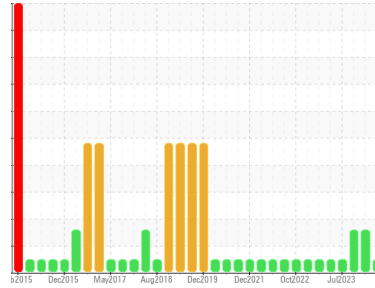

NORMAL

✓

DIAGNOSIS

Recommendation
Resample at the next service interval to monitor. (Customer Sample Comment: PM-3 sampled fluid)

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0086587	PCA0070650	PCA0084815
Sample Date	Client Info		04 Mar 2024	06 Dec 2023	18 Sep 2023
Machine Age	hrs	Client Info	55772	55193	54650
Oil Age	hrs	Client Info	55772	67475	54650
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	7	81	49
Chromium	ppm	ASTM D5185m >3	1	0	<1
Nickel	ppm	ASTM D5185m >3	0	0	<1
Titanium	ppm	ASTM D5185m >2	0	<1	<1
Silver	ppm	ASTM D5185m >2	<1	0	0
Aluminum	ppm	ASTM D5185m >30	0	2	4
Lead	ppm	ASTM D5185m >13	<1	0	0
Copper	ppm	ASTM D5185m >103	4	2	2
Tin	ppm	ASTM D5185m >5	<1	0	0
Antimony	ppm	ASTM D5185m >5	0	---	---
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<1	4	2
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 0	<1	13	6
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 9	1	19	15
Calcium	ppm	ASTM D5185m 3114	80	3371	3221
Phosphorus	ppm	ASTM D5185m 1099	614	974	1012
Zinc	ppm	ASTM D5185m 1245	828	1233	1250
Sulfur	ppm	ASTM D5185m 7086	1403	5679	5306


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >100	2	40	28
Sodium	ppm	ASTM D5185m	0	0	<1
Potassium	ppm	ASTM D5185m >20	<1	2	2

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >.2	NEG	0.2%	0.2%
Free Water	scalar	*Visual	NEG	NEG	NEG

OIL ANALYSIS REPORT








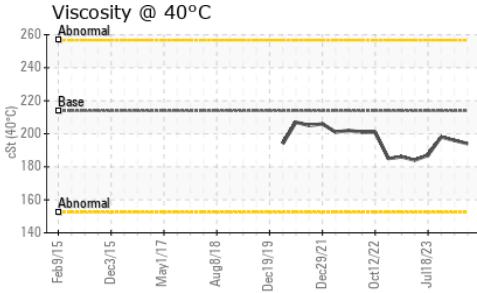


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	213.9	194	196	198

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color	no image		no image
Bottom	no image		no image

GRAPHS

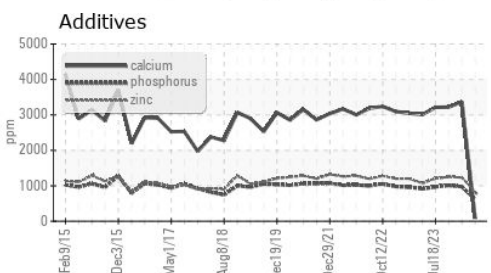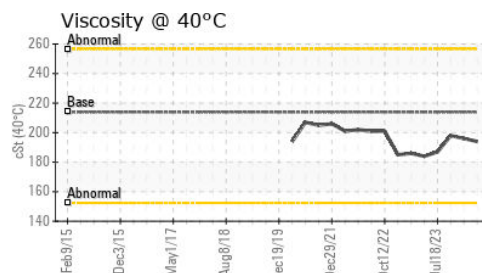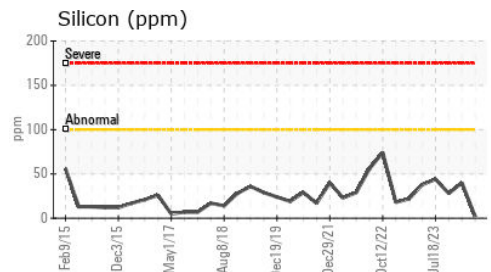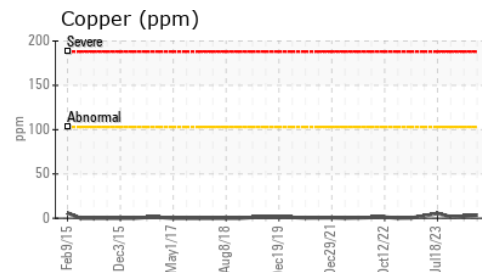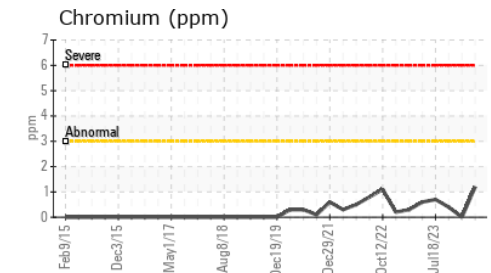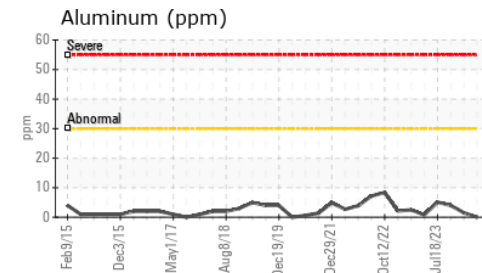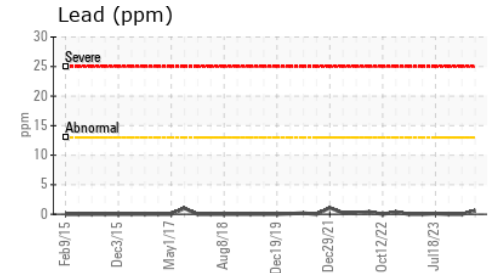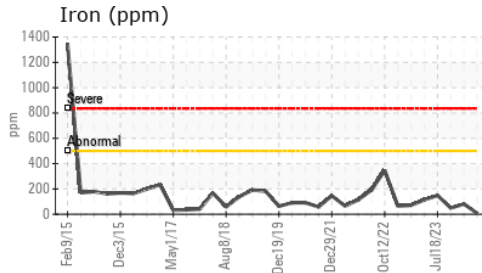

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0086587
Lab Number : **06115469**
Unique Number : 10924302
Test Package : MOB 1

Received : 11 Mar 2024
Tested : 13 Mar 2024
Diagnosed : 13 Mar 2024 - Don Baldrige

Kemp Quarries - Kemp Stone - Fairland
 18350 S 590 Rd
 Fairland, OK
 US 74343

Contact: fairland@kempstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: