


# OIL ANALYSIS REPORT



Area  
**KEMP QUARRIES / MUSKOGEE SAND [68980]**  
Machine Id  
**WL056**  
Component  
**Rear Left Final Drive**  
Fluid  
**PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)**

Sample Rating Trend

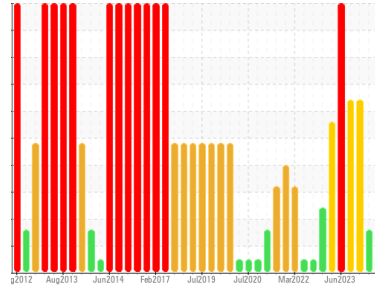

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: PM-1 sampled fluid )

### Wear

All component wear rates are normal.

### Contamination

The water content is negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0086580</b>	PCA0086555	PCA0084748
Sample Date	Client Info		<b>01 Mar 2024</b>	18 Dec 2023	03 Oct 2023
Machine Age	hrs	Client Info	<b>35093</b>	34606	34177
Oil Age	hrs	Client Info	<b>35093</b>	34606	34177
Oil Changed	Client Info		<b>N/A</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	SEVERE

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >800	<b>46</b>	71	▲ 863
Chromium	ppm	ASTM D5185m >10	<b>0</b>	<1	4
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	2
Titanium	ppm	ASTM D5185m >15	<b>0</b>	<1	3
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >75	<b>2</b>	5	● 63
Lead	ppm	ASTM D5185m >10	<b>0</b>	1	9
Copper	ppm	ASTM D5185m >75	<b>4</b>	12	77
Tin	ppm	ASTM D5185m >8	<b>&lt;1</b>	1	9
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>0</b>	1	16
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>&lt;1</b>	1	10
Manganese	ppm	ASTM D5185m 0	<b>0</b>	1	11
Magnesium	ppm	ASTM D5185m 9	<b>0</b>	32	126
Calcium	ppm	ASTM D5185m 3114	<b>2508</b>	3014	3020
Phosphorus	ppm	ASTM D5185m 1099	<b>880</b>	921	1072
Zinc	ppm	ASTM D5185m 1245	<b>947</b>	1150	1253
Sulfur	ppm	ASTM D5185m 7086	<b>4566</b>	4063	5664


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >400	<b>27</b>	47	▲ 403
Sodium	ppm	ASTM D5185m	<b>3</b>	2	36
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	29

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	MODER
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	HAZY	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	<b>NEG</b>	0.2%	▲ 0.2%
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG









# OIL ANALYSIS REPORT

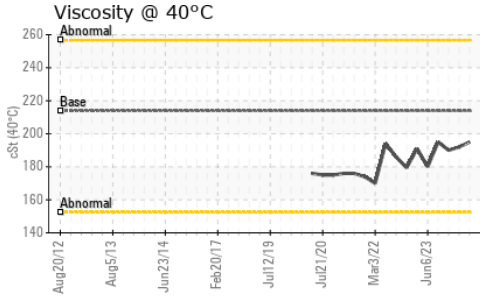

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	213.9	<b>195</b>	192	190

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color				no image	no image	
Bottom				no image	no image	

## GRAPHS

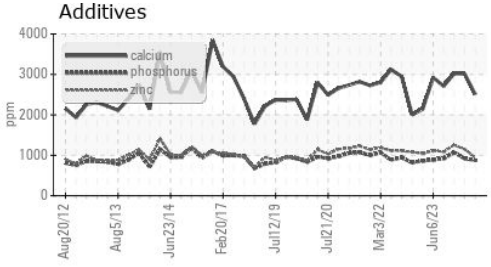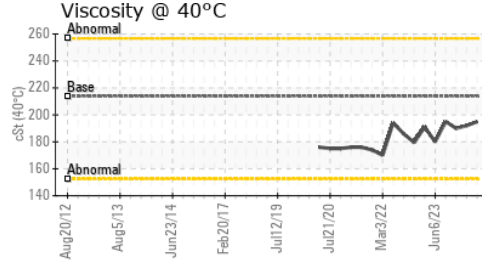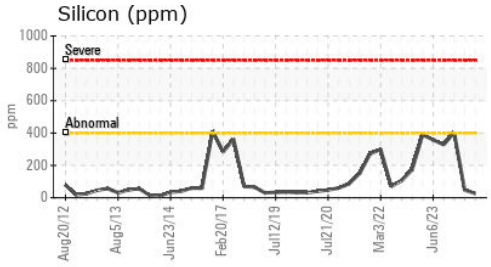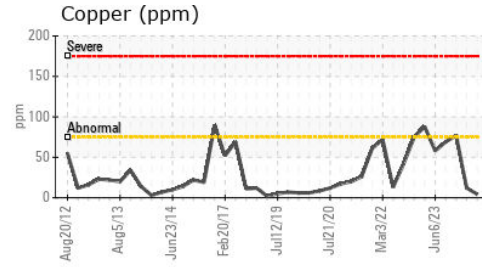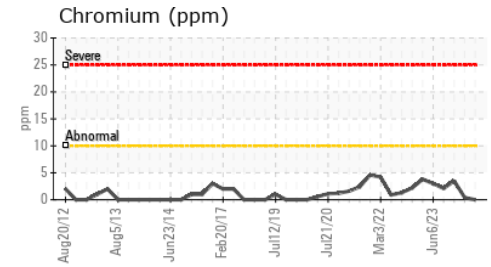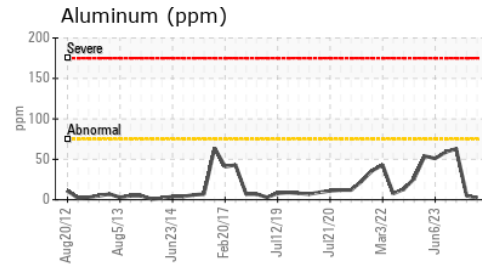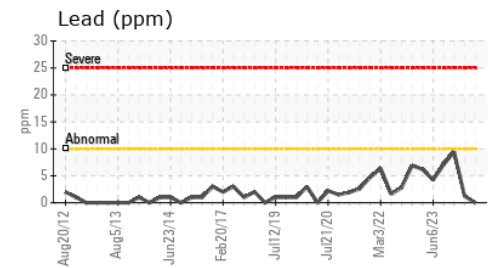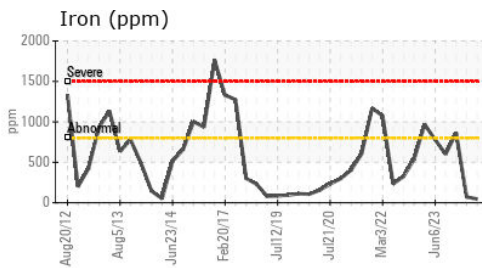

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0086580  
**Lab Number** : **06115480**  
**Unique Number** : 10924313  
**Test Package** : MOB 1

**Received** : 11 Mar 2024  
**Tested** : 12 Mar 2024  
**Diagnosed** : 13 Mar 2024 - Don Baldrige

**Kemp Quarries - Muskogee Sand**  
 3395 W 50th St N  
 Porter, OK  
 US 74454  
 Contact: MUSCOGEE NOTIFICATIONS  
 muskogee@muskogeessand.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: