




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

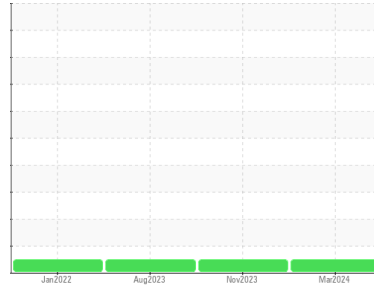

Machine Id
227014-740

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0061036	GFL0061043	GFL0030398	
Sample Date	Client Info	06 Mar 2024	25 Nov 2023	04 Aug 2023	
Machine Age	hrs	Client Info	12711	0	11363
Oil Age	hrs	Client Info	610	615	615
Oil Changed	Client Info	Changed	Changed	N/A	
Sample Status		NORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	49	65	65
Chromium	ppm ASTM D5185m >20	1	1	2
Nickel	ppm ASTM D5185m >4	0	0	<1
Titanium	ppm ASTM D5185m	0	0	<1
Silver	ppm ASTM D5185m >3	0	0	<1
Aluminum	ppm ASTM D5185m >20	4	6	8
Lead	ppm ASTM D5185m >40	<1	3	4
Copper	ppm ASTM D5185m >330	1	1	2
Tin	ppm ASTM D5185m >15	0	0	<1
Antimony	ppm ASTM D5185m	---	---	---
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	4	5	7
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	65	74	77
Manganese	ppm ASTM D5185m 0	<1	0	1
Magnesium	ppm ASTM D5185m 1010	1015	1167	1131
Calcium	ppm ASTM D5185m 1070	1161	1340	1324
Phosphorus	ppm ASTM D5185m 1150	1073	1271	1209
Zinc	ppm ASTM D5185m 1270	1268	1634	1544
Sulfur	ppm ASTM D5185m 2060	3101	3368	3707

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	5	6	7
Sodium	ppm ASTM D5185m	4	8	17
Potassium	ppm ASTM D5185m >20	3	10	13

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.8	0.9	0.9
Nitration	Abs/cm *ASTM D7624 >20	13.0	13.7	14.5
Sulfation	Abs/.1mm *ASTM D7415 >30	24.6	26.0	27.2

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	25.2	27.6	29.3
Base Number (BN)	mg KOH/g ASTM D2896 9.8	6.4	6.7	5.7







OIL ANALYSIS REPORT

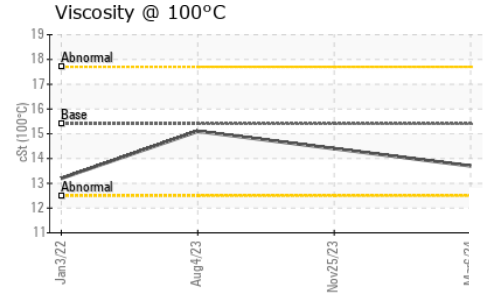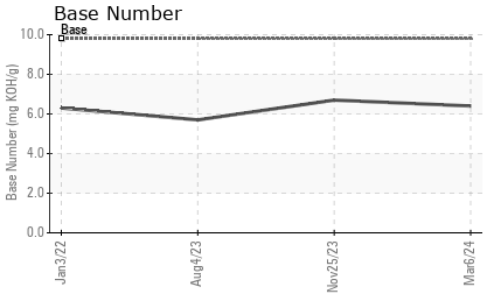

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.7	14.4	15.1

GRAPHS

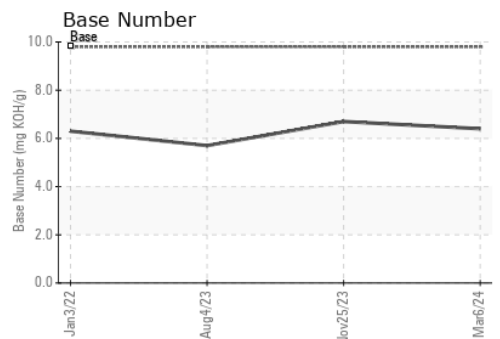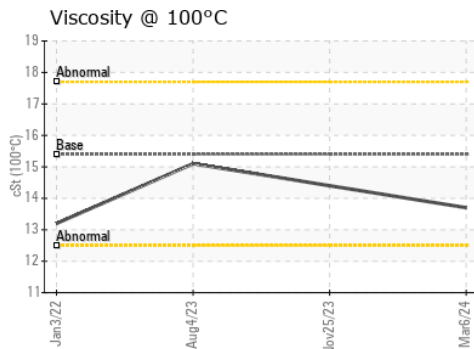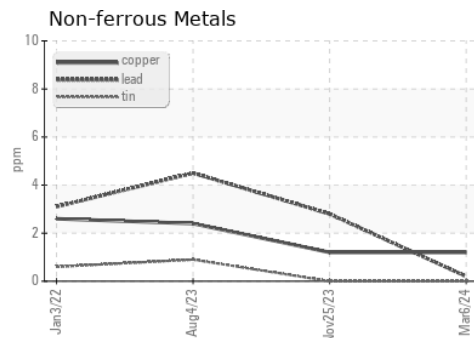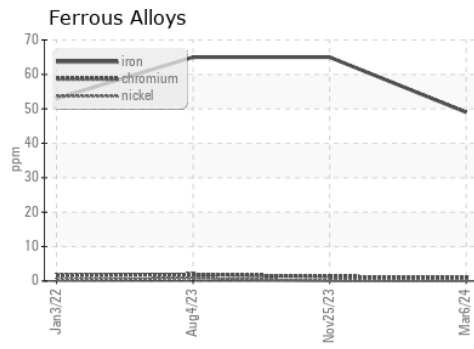

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0061036 **Received** : 12 Mar 2024
Lab Number : **06115662** **Tested** : 13 Mar 2024
Unique Number : 10924495 **Diagnosed** : 13 Mar 2024 - Don Baldrige
Test Package : FLEET

GFL ENVIRONMENTAL - 635 - WHITEHALL PC
 1680 PEACH ST
 WHITEHALL, MI
 US 49461
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: