




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**422022-402157**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

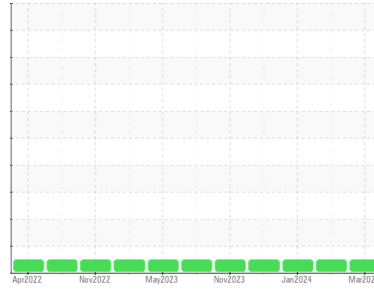

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0109256</b>	GFL0109261	GFL0048372
Sample Date	Client Info		<b>11 Mar 2024</b>	07 Feb 2024	10 Jan 2024
Machine Age	hrs	Client Info	<b>42877</b>	42815	42743
Oil Age	hrs	Client Info	<b>268</b>	206	134
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>14</b>	8	2
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185m >40	<b>0</b>	1	1
Copper	ppm	ASTM D5185m >330	<b>3</b>	3	1
Tin	ppm	ASTM D5185m >15	<b>0</b>	1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>1</b>	2	<1
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>55</b>	58	53
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m 1010	<b>913</b>	956	912
Calcium	ppm	ASTM D5185m 1070	<b>1034</b>	1034	976
Phosphorus	ppm	ASTM D5185m 1150	<b>1006</b>	1041	948
Zinc	ppm	ASTM D5185m 1270	<b>1143</b>	1243	1228
Sulfur	ppm	ASTM D5185m 2060	<b>3325</b>	3164	2925

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	3	3
Sodium	ppm	ASTM D5185m	<b>1</b>	1	<1
Potassium	ppm	ASTM D5185m >20	<b>0</b>	0	<1

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.7</b>	0.6	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.3</b>	5.1	4.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.9</b>	17.9	17.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.9</b>	12.6	12.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.9</b>	8.9	8.8







# OIL ANALYSIS REPORT

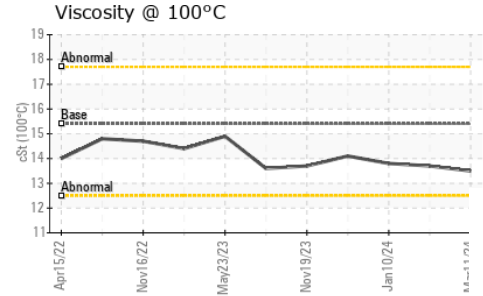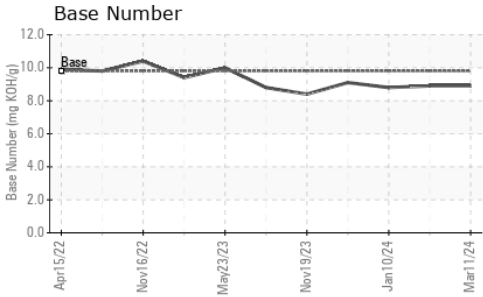

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.5</b>	13.7	13.8

## GRAPHS

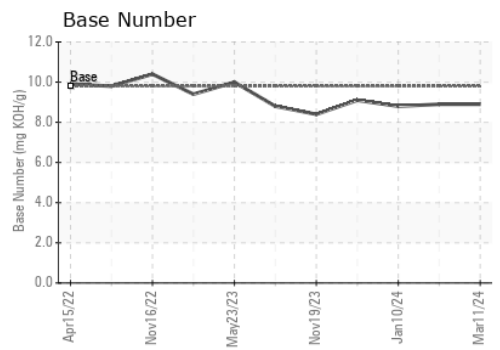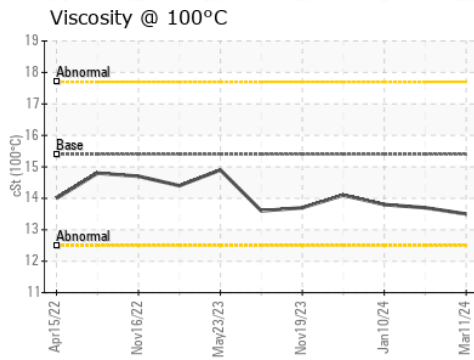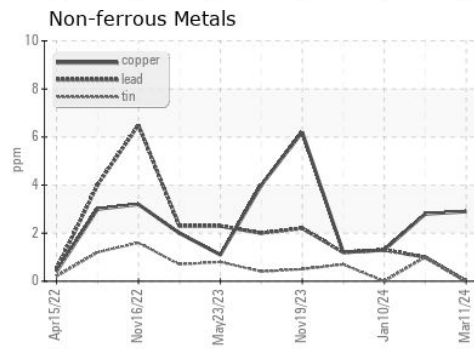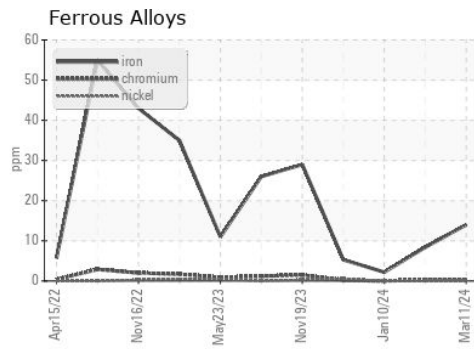

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0109256 **Received** : 12 Mar 2024  
**Lab Number** : **06115689** **Tested** : 13 Mar 2024  
**Unique Number** : 10924522 **Diagnosed** : 13 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 891 - Oklahoma City Hauling**  
 1001 South Rockwell  
 Oklahoma City, OK  
 US 73128  
 Contact: Andy Smith  
 andrew.smith@gflenv.com  
 T: (405)306-1651  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)