


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

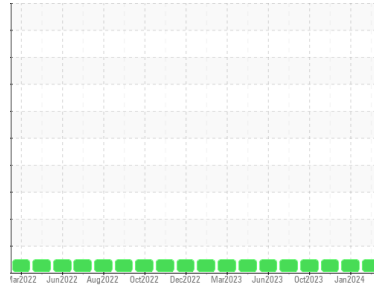

Area  
**Plymouth & Brockton**  
 Machine Id  
**11441**  
 Component  
**Diesel Engine**  
 Fluid  
 **DIESEL ENGINE OIL SAE 15W40 (36 QTS)**

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0109874</b>	PCA0104561	PCA0104710
Sample Date	Client Info	<b>22 Feb 2024</b>	10 Jan 2024	29 Nov 2023
Machine Age	mls Client Info	<b>232840</b>	221689	210508
Oil Age	mls Client Info	<b>12000</b>	24000	12000
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	<b>10</b>	13	9
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm ASTM D5185m >2	<b>0</b>	1	2
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>1</b>	2	3
Lead	ppm ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	0	<1
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	<b>7</b>	9	9
Barium	ppm ASTM D5185m 10	<b>0</b>	<1	0
Molybdenum	ppm ASTM D5185m 100	<b>55</b>	57	61
Manganese	ppm ASTM D5185m	<b>0</b>	<1	0
Magnesium	ppm ASTM D5185m 450	<b>877</b>	852	939
Calcium	ppm ASTM D5185m 3000	<b>1063</b>	1007	1094
Phosphorus	ppm ASTM D5185m 1150	<b>975</b>	924	991
Zinc	ppm ASTM D5185m 1350	<b>1135</b>	1149	1207
Sulfur	ppm ASTM D5185m 4250	<b>3355</b>	2679	3293

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>2</b>	3	3
Sodium	ppm ASTM D5185m >158	<b>3</b>	<1	0
Potassium	ppm ASTM D5185m >20	<b>1</b>	<1	2



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>1.4</b>	1.9	1
Nitration	Abs/cm *ASTM D7624 >20	<b>7.6</b>	9.2	7.1
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.8</b>	21.9	19.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.5</b>	14.9	13.5
Base Number (BN)	mg KOH/g ASTM D2896 8.5	<b>9.90</b>	8.91	9.20









# OIL ANALYSIS REPORT

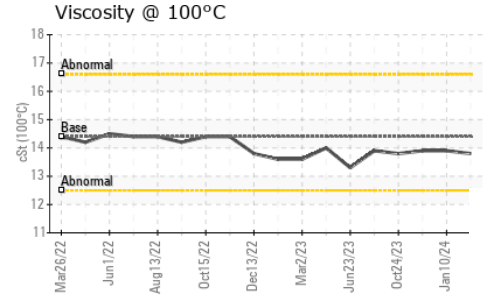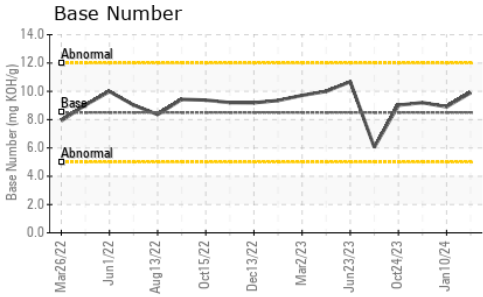

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.8</b>	13.9	13.9

## GRAPHS

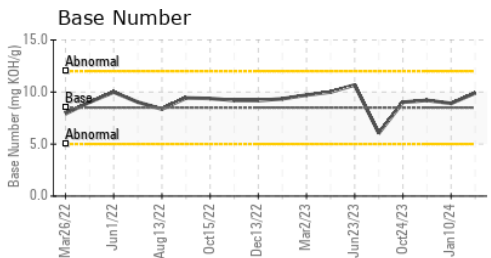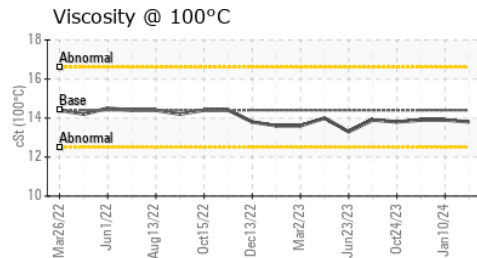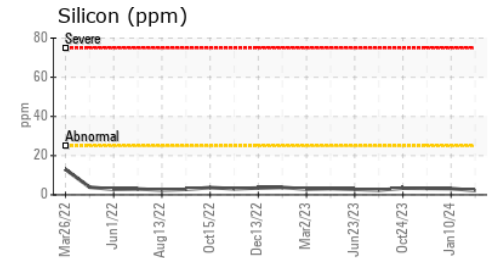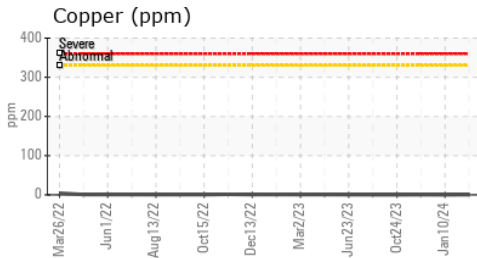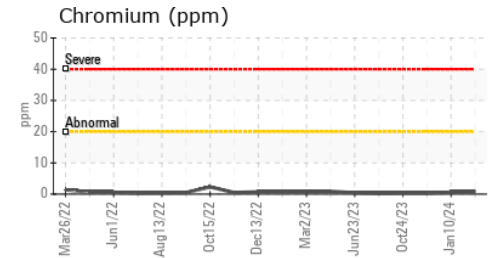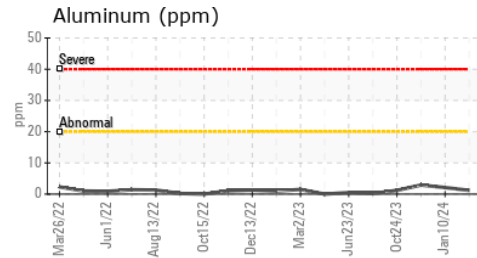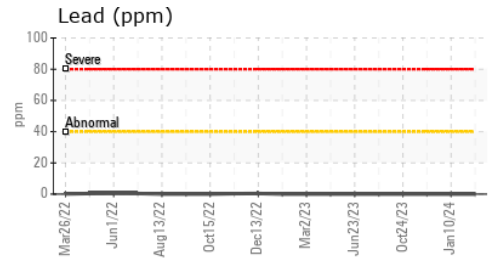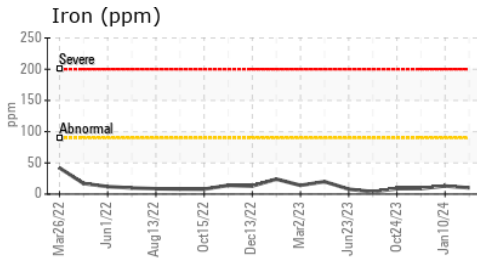

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0109874 **Received** : 12 Mar 2024  
**Lab Number** : **06116039** **Tested** : 13 Mar 2024  
**Unique Number** : 10924872 **Diagnosed** : 13 Mar 2024 - Wes Davis  
**Test Package** : MOB 2

**PLYMOUTH & BROCKTON**  
 8 INDUSTRIAL PARK RD  
 PLYMOUTH, MA  
 US 02360  
 Contact: Donald Pelquin  
 Dpelquin@P-B.com  
 T: (508)732-6039  
 F: (508)732-6091

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)