


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Machine Id
DT40
Component
Front Differential
Fluid
GEAR OIL SAE 75W90 (--- GAL)

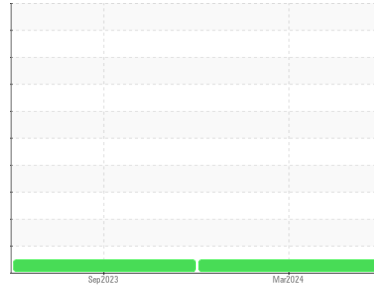

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0119960	PCA0104170	---
Sample Date	Client Info		06 Mar 2024	27 Sep 2023	---
Machine Age	mls	Client Info	53322	53322	---
Oil Age	mls	Client Info	53322	0	---
Oil Changed	Client Info		N/A	Not Changd	---
Sample Status			NORMAL	NORMAL	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >1200	203	164	---
Chromium	ppm	ASTM D5185m >8	2	2	---
Nickel	ppm	ASTM D5185m >20	<1	4	---
Titanium	ppm	ASTM D5185m >4	<1	<1	---
Silver	ppm	ASTM D5185m	0	7	---
Aluminum	ppm	ASTM D5185m >30	8	4	---
Lead	ppm	ASTM D5185m >25	0	<1	---
Copper	ppm	ASTM D5185m >50	9	1	---
Tin	ppm	ASTM D5185m >5	<1	1	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	<1	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 400	86	156	---
Barium	ppm	ASTM D5185m 200	0	0	---
Molybdenum	ppm	ASTM D5185m 12	0	0	---
Manganese	ppm	ASTM D5185m	14	3	---
Magnesium	ppm	ASTM D5185m 12	183	13	---
Calcium	ppm	ASTM D5185m 150	0	44	---
Phosphorus	ppm	ASTM D5185m 1650	1915	1083	---
Zinc	ppm	ASTM D5185m 125	0	21	---
Sulfur	ppm	ASTM D5185m 22500	30911	23777	---


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >230	38	191	---
Sodium	ppm	ASTM D5185m	3	3	---
Potassium	ppm	ASTM D5185m >20	1	1	---

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual NONE	NONE	NONE	---
Precipitate	scalar	*Visual NONE	NONE	NONE	---
Silt	scalar	*Visual NONE	NONE	NONE	---
Debris	scalar	*Visual NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	---
Appearance	scalar	*Visual NORML	NORML	NORML	---
Odor	scalar	*Visual NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual >.2	NEG	NEG	---
Free Water	scalar	*Visual	NEG	NEG	---

OIL ANALYSIS REPORT

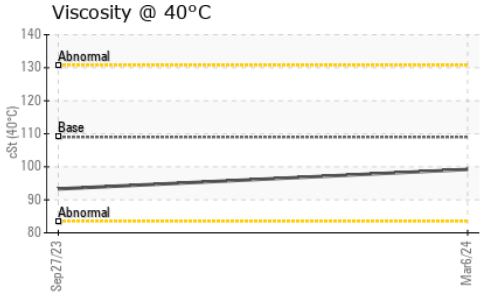




FLUID PROPERTIES	method	limit/base	current	history1	history2
------------------	--------	------------	---------	----------	----------

Visc @ 40°C	cSt	ASTM D445	109	99.2	93.3	---
-------------	-----	-----------	-----	-------------	------	-----

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

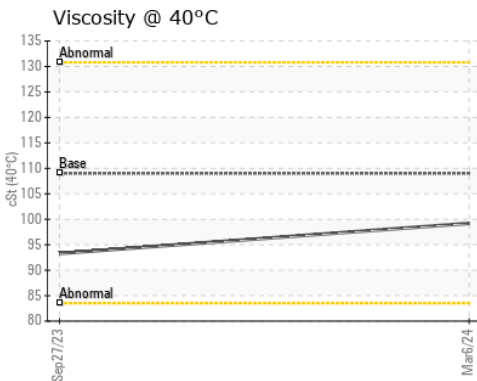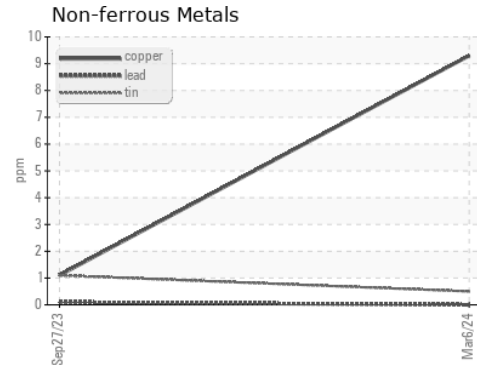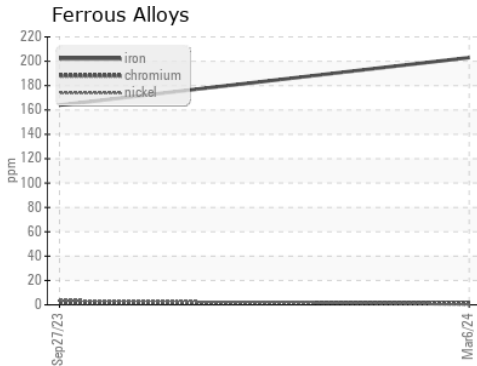

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0119960 **Received** : 12 Mar 2024
Lab Number : **06116232** **Tested** : 13 Mar 2024
Unique Number : 10925065 **Diagnosed** : 14 Mar 2024 - Don Baldrige
Test Package : FLEET

NW WHITE & CO - COLUMBIA DIVISION
 100 INDEPENDENCE BLVD
 COLUMBIA, SC
 US 29210
 Contact: GEORGE EDWARDS
 gedwards@nwwhite.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: