


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

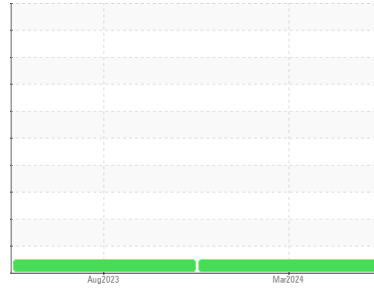

Area  
**(50931Z) Walgreens - Tractor**  
Machine Id  
**[Walgreens - Tractor] 136A63277**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0093932</b>	PCA0093990	---
Sample Date	Client Info	<b>01 Mar 2024</b>	18 Aug 2023	---
Machine Age	mls Client Info	<b>111659</b>	55283	---
Oil Age	mls Client Info	<b>55283</b>	0	---
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	---
Sample Status		<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method >0.2	<b>NEG</b>	NEG	---
Glycol	WC Method	<b>NEG</b>	NEG	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>17</b>	8	---
Chromium	ppm ASTM D5185m >5	<b>2</b>	<1	---
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	---
Titanium	ppm ASTM D5185m	<b>4</b>	<1	---
Silver	ppm ASTM D5185m >3	<b>&lt;1</b>	0	---
Aluminum	ppm ASTM D5185m >30	<b>8</b>	<1	---
Lead	ppm ASTM D5185m >30	<b>0</b>	0	---
Copper	ppm ASTM D5185m >150	<b>68</b>	88	---
Tin	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	---
Vanadium	ppm ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>0</b>	14	---
Barium	ppm ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm ASTM D5185m 50	<b>60</b>	58	---
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	---
Magnesium	ppm ASTM D5185m 950	<b>951</b>	967	---
Calcium	ppm ASTM D5185m 1050	<b>1158</b>	1183	---
Phosphorus	ppm ASTM D5185m 995	<b>1048</b>	1016	---
Zinc	ppm ASTM D5185m 1180	<b>1275</b>	1223	---
Sulfur	ppm ASTM D5185m 2600	<b>2944</b>	3617	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>4</b>	3	---
Sodium	ppm ASTM D5185m	<b>1</b>	<1	---
Potassium	ppm ASTM D5185m >20	<b>20</b>	10	---



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.5</b>	0.2	---
Nitration	Abs/cm *ASTM D7624 >20	<b>7.9</b>	5.2	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.4</b>	17.4	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.0</b>	12.9	---
Base Number (BN)	mg KOH/g ASTM D2896	<b>7.3</b>	8.7	---





# OIL ANALYSIS REPORT

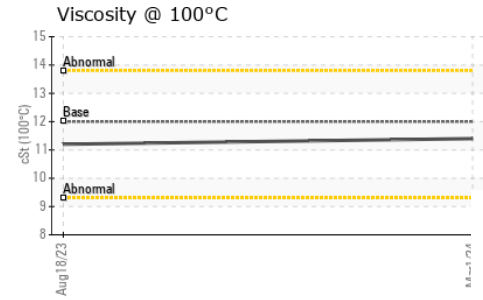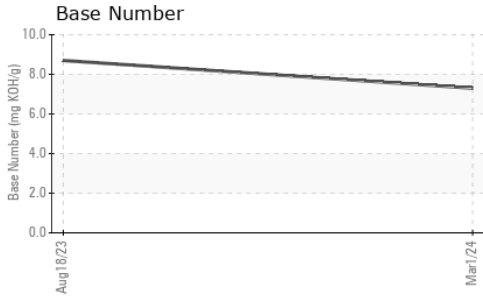

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.4</b>	11.2	---

## GRAPHS

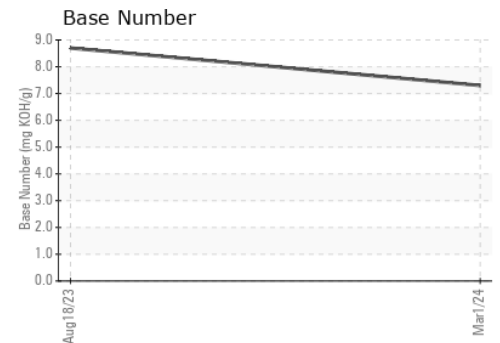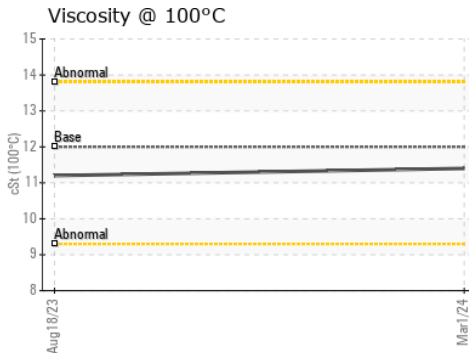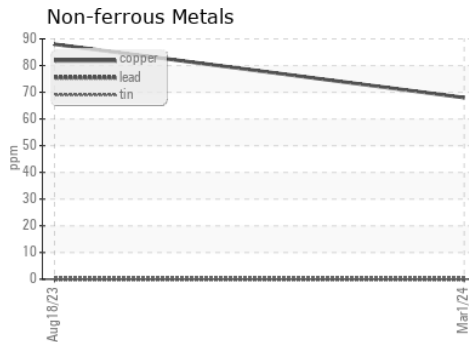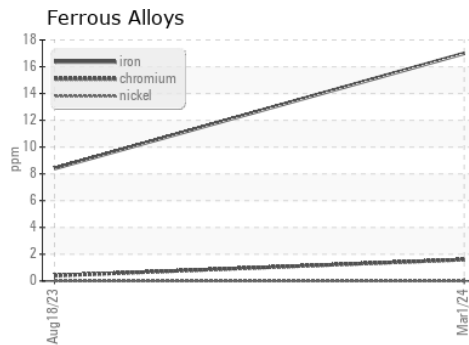

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0093932      **Received** : 12 Mar 2024  
**Lab Number** : **06116344**      **Tested** : 13 Mar 2024  
**Unique Number** : 10925177      **Diagnosed** : 13 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1372 - Berkeley-Moreno Valley**  
 17500 Perris Blvd.  
 Moreno Valley, CA  
 US 92551  
 Contact: Ryan Cruz  
 rcruz@transervice.com  
 T: (951)924-7131  
 F: (951)924-7151

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)