




PROBLEM SUMMARY

Sample Rating Trend

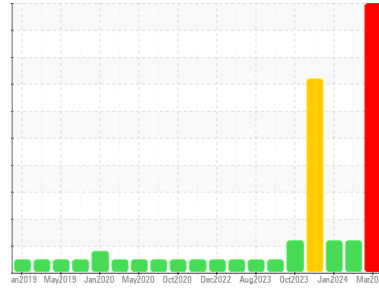

GLYCOL




Machine Id
928091-260348

Component
Diesel Engine


Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

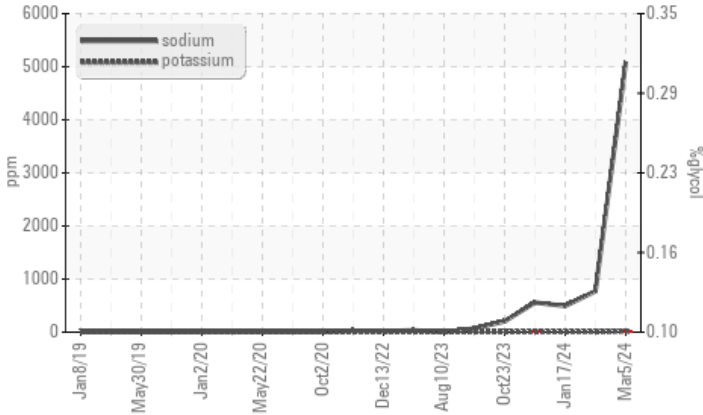

▲ Silicon (ppm)

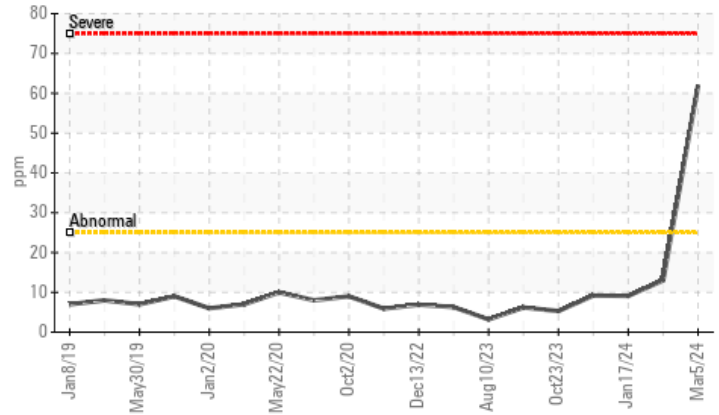

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

| Sample Status | | | | SEVERE | ABNORMAL | ABNORMAL |
|---------------|-----|-------------|-----|--------|----------|----------|
| Silicon | ppm | ASTM D5185m | >25 | ▲ 62 | 13 | 9 |
| Sodium | ppm | ASTM D5185m | | ▲ 5084 | ▲ 772 | ▲ 493 |
| Potassium | ppm | ASTM D5185m | >20 | ▲ 15 | 7 | 4 |
| Glycol | % | *ASTM D2982 | | ▲ 0.10 | NEG | NEG |

Customer Id: GFL837
 Sample No.: GFL0114121
 Lab Number: 06116357
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|---------------------|--------|------|---------|---|
| Change Fluid | --- | --- | ? | We recommend that you drain the oil and perform a filter service on this component if not already done. |
| Change Filter | --- | --- | ? | We recommend that you drain the oil and perform a filter service on this component if not already done. |
| Resample | --- | --- | ? | We recommend an early resample to monitor this condition. |
| Check Glycol Access | --- | --- | ? | We advise that you check for the source of the coolant leak. |

HISTORICAL DIAGNOSIS

07 Feb 2024 Diag: Jonathan Hester

GLYCOL



We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



17 Jan 2024 Diag: Jonathan Hester

GLYCOL



We advise that you check for possible coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels remain high. The BN result indicates that there is suitable alkalinity remaining in the oil.

view report



06 Nov 2023 Diag: Wes Davis

GLYCOL



We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition. All component wear rates are normal. Test for glycol is positive. There is a high concentration of glycol present in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

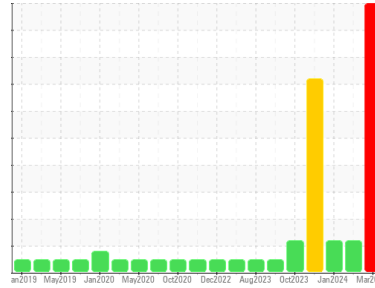

GLYCOL



Machine Id
928091-260348

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high. Test for glycol is positive. Elemental level of silicon (Si) above normal indicating ingress of seal material.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 | |
|---------------|-------------|--------------------|--------------|-------------|-------|
| Sample Number | Client Info | GFL0114121 | GFL0108084 | GFL0108146 | |
| Sample Date | Client Info | 05 Mar 2024 | 07 Feb 2024 | 17 Jan 2024 | |
| Machine Age | hrs | Client Info | 13883 | 13734 | 13599 |
| Oil Age | hrs | Client Info | 13748 | 13599 | 0 |
| Oil Changed | Client Info | N/A | Not Changd | Changed | |
| Sample Status | | SEVERE | ABNORMAL | ABNORMAL | |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|----------------|----------------|----------|----------|
| Fuel | WC Method >5 | <1.0 | <1.0 | <1.0 |
| Water | WC Method >0.2 | NEG | NEG | NEG |

WEAR METALS

| method | limit/base | current | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron | ppm ASTM D5185m >100 | 25 | 13 | 12 |
| Chromium | ppm ASTM D5185m >20 | <1 | <1 | <1 |
| Nickel | ppm ASTM D5185m >4 | 0 | 0 | 0 |
| Titanium | ppm ASTM D5185m | <1 | 0 | <1 |
| Silver | ppm ASTM D5185m >3 | 0 | 0 | 0 |
| Aluminum | ppm ASTM D5185m >20 | 7 | 4 | 2 |
| Lead | ppm ASTM D5185m >40 | 0 | 0 | 0 |
| Copper | ppm ASTM D5185m >330 | 9 | 4 | 7 |
| Tin | ppm ASTM D5185m >15 | 0 | <1 | <1 |
| Vanadium | ppm ASTM D5185m | 0 | 0 | 0 |
| Cadmium | ppm ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| method | limit/base | current | history1 | history2 |
|------------|----------------------|--------------|----------|----------|
| Boron | ppm ASTM D5185m 0 | 135 | 16 | 16 |
| Barium | ppm ASTM D5185m 0 | 0 | 0 | 0 |
| Molybdenum | ppm ASTM D5185m 60 | 228 | 79 | 68 |
| Manganese | ppm ASTM D5185m 0 | <1 | <1 | <1 |
| Magnesium | ppm ASTM D5185m 1010 | 910 | 956 | 919 |
| Calcium | ppm ASTM D5185m 1070 | 1036 | 1002 | 1026 |
| Phosphorus | ppm ASTM D5185m 1150 | 1062 | 1044 | 982 |
| Zinc | ppm ASTM D5185m 1270 | 1228 | 1225 | 1131 |
| Sulfur | ppm ASTM D5185m 2060 | 3557 | 3164 | 2907 |

CONTAMINANTS

| method | limit/base | current | history1 | history2 |
|-----------|---------------------|---------------|----------|----------|
| Silicon | ppm ASTM D5185m >25 | ▲ 62 | 13 | 9 |
| Sodium | ppm ASTM D5185m | ▲ 5084 | ▲ 772 | ▲ 493 |
| Potassium | ppm ASTM D5185m >20 | ▲ 15 | 7 | 4 |
| Glycol | % *ASTM D2982 | ▲ 0.10 | NEG | NEG |

INFRA-RED

| method | limit/base | current | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot % | % *ASTM D7844 >3 | 1.4 | 0.7 | 0.2 |
| Nitration | Abs/cm *ASTM D7624 >20 | 14.4 | 8.4 | 7.0 |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | 23.6 | 19.5 | 17.7 |


FLUID DEGRADATION

| method | limit/base | current | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation | Abs/.1mm *ASTM D7414 >25 | 14.6 | 13.7 | 13.5 |
| Base Number (BN) | mg KOH/g ASTM D2896 9.8 | 28.5 | 10.9 | 11.4 |




OIL ANALYSIS REPORT


▲ Glycol Contamination

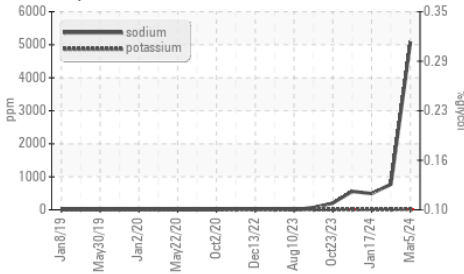


▲ Silicon (ppm)

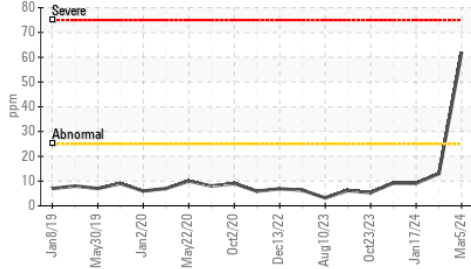

Base Number

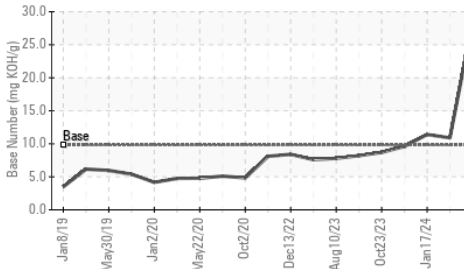

Viscosity @ 100°C

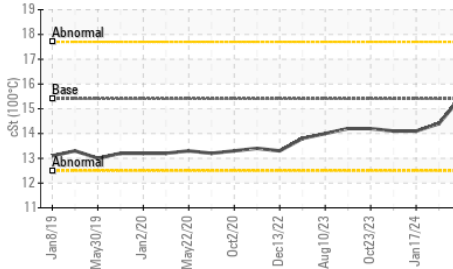

VISUAL


| method | limit/base | current | history1 | history2 | |
|------------------|------------|---------|----------|----------|-------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

FLUID PROPERTIES


| method | limit/base | current | history1 | history2 | | |
|--------------|------------|-----------|----------|----------|------|------|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 15.5 | 14.4 | 14.1 |

GRAPHS


Ferrous Alloys

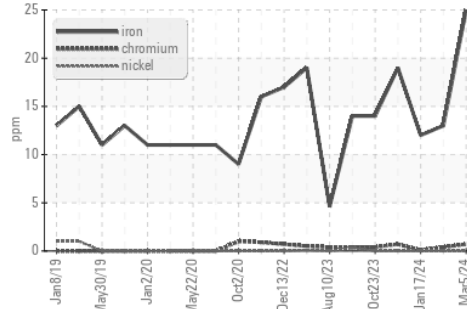


Non-ferrous Metals

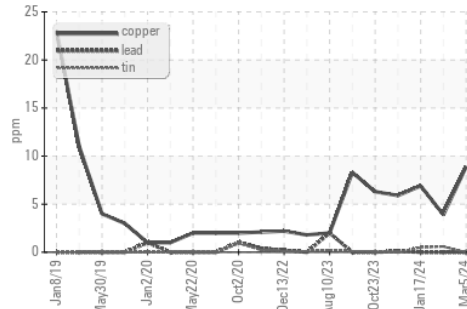

Viscosity @ 100°C

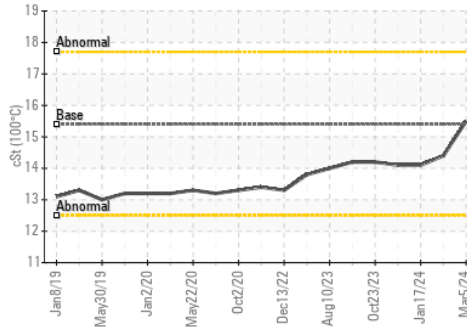

Base Number

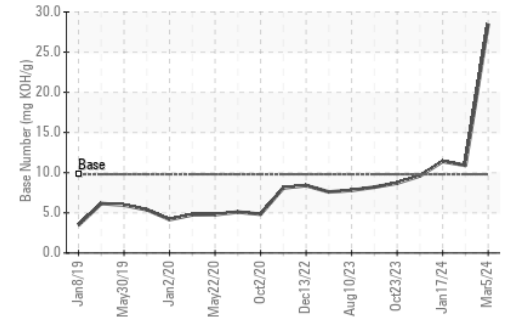

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0114121

Lab Number : 06116357

Unique Number : 10925190

Test Package : FLEET (Additional Tests: Glycol)

Received : 12 Mar 2024

Tested : 13 Mar 2024

Diagnosed : 14 Mar 2024 - Jonathan Hester

GFL Environmental - 837 - Harrison TS

22820 S State Route 291

Harrisonville, MO

US 64701

Contact: JOHNNY PEREZ

johnny.perez@gflenv.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)