




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

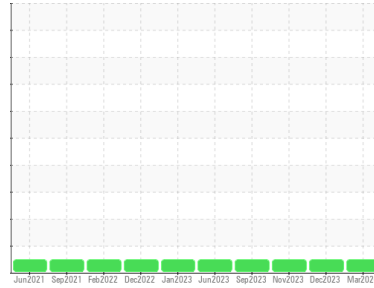

Machine Id  
**927022-597**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 XLE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0104660</b>	GFL0096323	GFL0096311
Sample Date	Client Info		<b>07 Mar 2024</b>	18 Dec 2023	28 Nov 2023
Machine Age	hrs	Client Info	<b>19789</b>	19221	19187
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	Changed	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>8</b>	8	12
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>11</b>	5	6
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	4	4
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>1</b>	1	<1
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>57</b>	126	153
Barium	ppm	ASTM D5185m	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m	<b>50</b>	77	85
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	<b>681</b>	647	632
Calcium	ppm	ASTM D5185m	<b>1510</b>	1532	1427
Phosphorus	ppm	ASTM D5185m 760	<b>712</b>	609	691
Zinc	ppm	ASTM D5185m 830	<b>800</b>	795	802
Sulfur	ppm	ASTM D5185m 2770	<b>3256</b>	2489	2604

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>8</b>	6	13
Sodium	ppm	ASTM D5185m	<b>6</b>	4	3
Potassium	ppm	ASTM D5185m >20	<b>3</b>	1	4

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.6</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.5</b>	10.3	10.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.2</b>	22.6	22.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.1</b>	18.8	18.2
Base Number (BN)	mg KOH/g	ASTM D2896 10.7	<b>5.7</b>	6.5	6.9







# OIL ANALYSIS REPORT

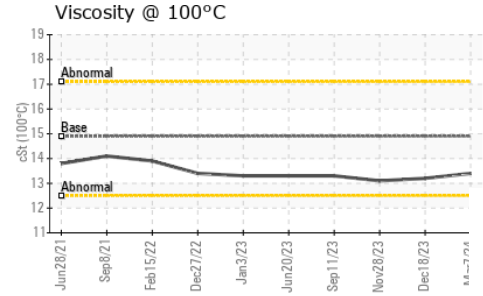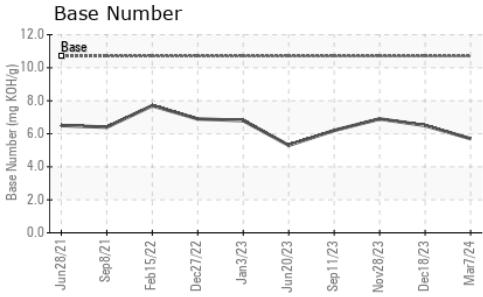

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.9	<b>13.4</b>	13.2	13.1

## GRAPHS

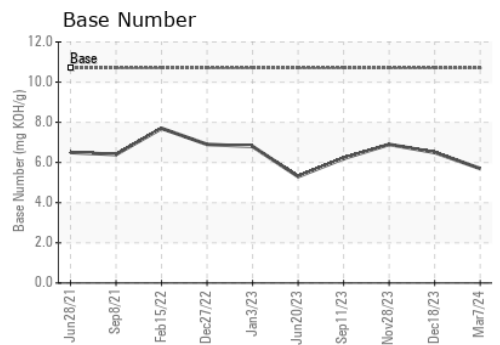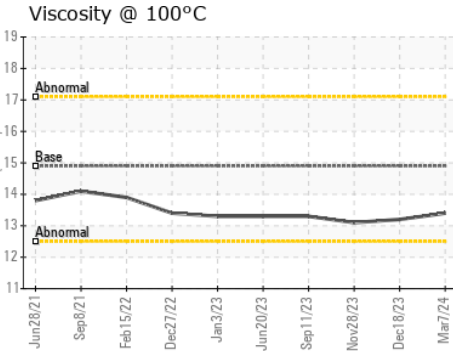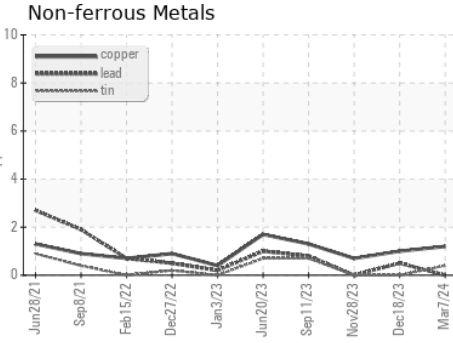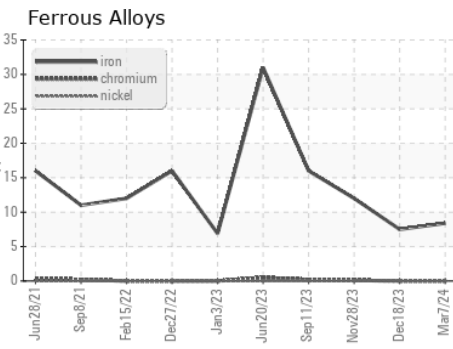

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0104660 **Received** : 12 Mar 2024  
**Lab Number** : **06116382** **Tested** : 13 Mar 2024  
**Unique Number** : 10925215 **Diagnosed** : 13 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 624 - Elmira Hauling**  
 10164 M-32  
 Elmira, MI  
 US 49730  
 Contact: ANDY GROBASKI  
 andyg@americanwaste.org  
 T: (989)370-2941  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)