




OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Machine Id
729016-1263
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (24 QTS)

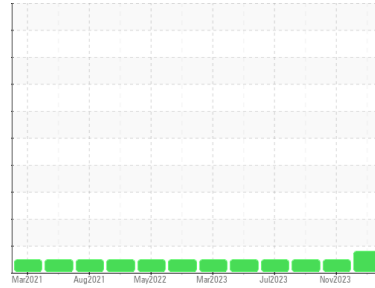

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0110344	GFL0102795	GFL0090526
Sample Date	Client Info		08 Mar 2024	30 Nov 2023	09 Oct 2023
Machine Age	hrs	Client Info	10831	10243	9982
Oil Age	hrs	Client Info	849	261	602
Oil Changed	Client Info		Changed	Not Changd	Changed
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	▲ 87	41	78
Chromium	ppm	ASTM D5185m >5	3	2	4
Nickel	ppm	ASTM D5185m >2	2	2	2
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >30	5	3	4
Lead	ppm	ASTM D5185m >30	0	0	0
Copper	ppm	ASTM D5185m >150	2	<1	3
Tin	ppm	ASTM D5185m >5	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	5	0
Barium	ppm	ASTM D5185m 0	0	0	3
Molybdenum	ppm	ASTM D5185m 60	63	61	59
Manganese	ppm	ASTM D5185m 0	<1	<1	1
Magnesium	ppm	ASTM D5185m 1010	914	914	874
Calcium	ppm	ASTM D5185m 1070	1084	1054	1024
Phosphorus	ppm	ASTM D5185m 1150	995	1052	904
Zinc	ppm	ASTM D5185m 1270	1237	1284	1125
Sulfur	ppm	ASTM D5185m 2060	2928	3073	2516

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	15	9	17
Sodium	ppm	ASTM D5185m	7	3	8
Potassium	ppm	ASTM D5185m >20	2	1	2

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.7	0.3	0.5
Nitration	Abs/cm	*ASTM D7624 >20	11.4	7.8	9.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.5	18.6	20.0


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.9	15.1	17.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	6.2	8.4	7.1




OIL ANALYSIS REPORT


▲ Ferrous Alloys

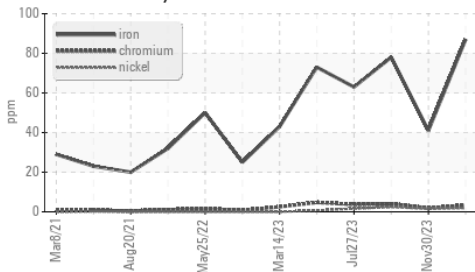

Base Number

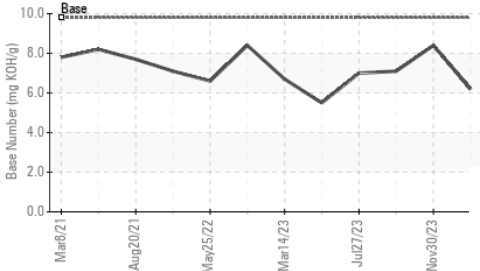

Viscosity @ 100°C

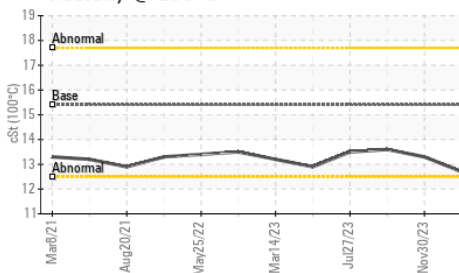


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.7	13.3

GRAPHS


▲ Ferrous Alloys

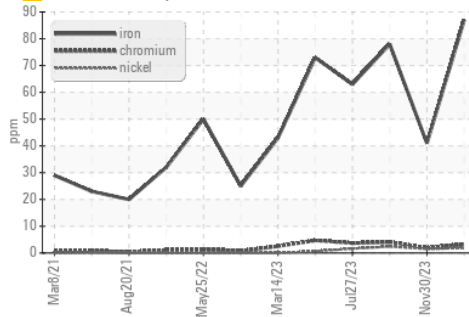


Non-ferrous Metals

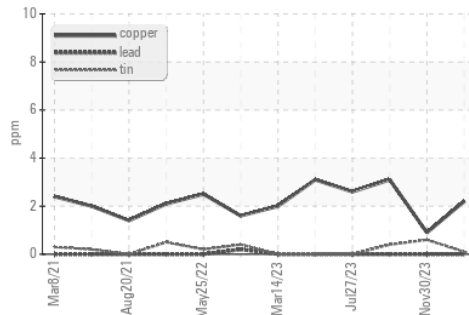

Viscosity @ 100°C

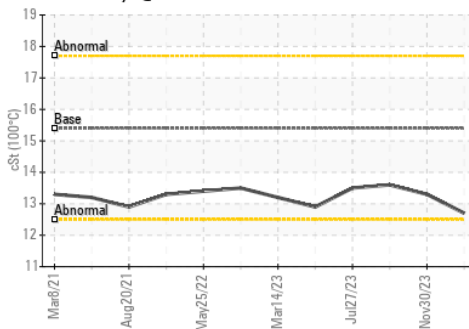

Base Number

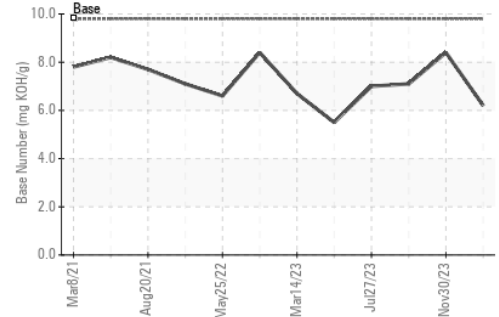

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0110344
Lab Number : 06116385
Unique Number : 10925218
Test Package : FLEET
Received : 12 Mar 2024
Tested : 13 Mar 2024
Diagnosed : 14 Mar 2024 - Don Baldrige

GFL Environmental - 622 - Traverse City Hauling
 160 Hughes Dr
 Traverse City, MI
 US 49686
 Contact: GARY BREWER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: