




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**MONTGOMERY**  
 Machine Id  
**MACK 913008**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

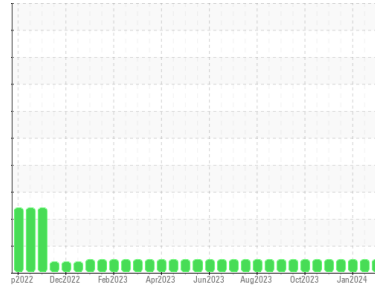

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0115583</b>	GFL0081895	GFL0081898
Sample Date	Client Info	<b>11 Mar 2024</b>	24 Jan 2024	11 Jan 2024
Machine Age	hrs	<b>4597</b>	4241	4097
Oil Age	hrs	<b>1135</b>	779	635
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>4</b>	6	5
Chromium	ppm ASTM D5185m >20	<b>0</b>	0	0
Nickel	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>1</b>	2	2
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	0	0
Copper	ppm ASTM D5185m >330	<b>0</b>	<1	<1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>4</b>	3	8
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>59</b>	58	61
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>951</b>	961	973
Calcium	ppm ASTM D5185m 1070	<b>1055</b>	1071	1102
Phosphorus	ppm ASTM D5185m 1150	<b>1067</b>	1037	1084
Zinc	ppm ASTM D5185m 1270	<b>1257</b>	1245	1268
Sulfur	ppm ASTM D5185m 2060	<b>3573</b>	3089	3150

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	5	5
Sodium	ppm ASTM D5185m	<b>4</b>	2	2
Potassium	ppm ASTM D5185m >20	<b>&lt;1</b>	11	8

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.4</b>	0.3	0.2
Nitration	Abs/cm *ASTM D7624 >20	<b>6.5</b>	7.7	6.6
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>17.8</b>	19.4	19.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.9</b>	15.7	15.3
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.3</b>	8.0	8.4







# OIL ANALYSIS REPORT

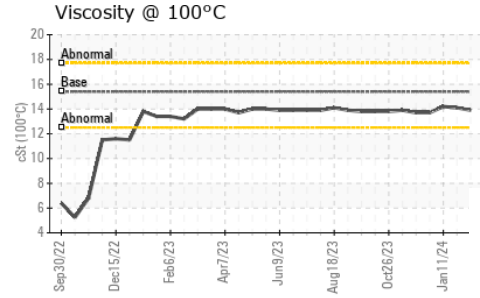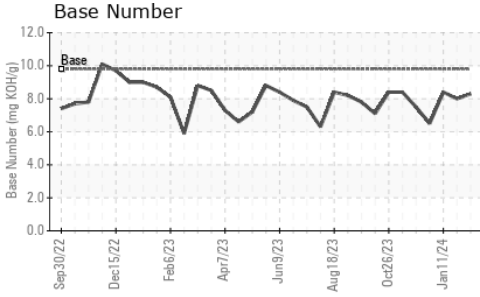

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	14.1

## GRAPHS

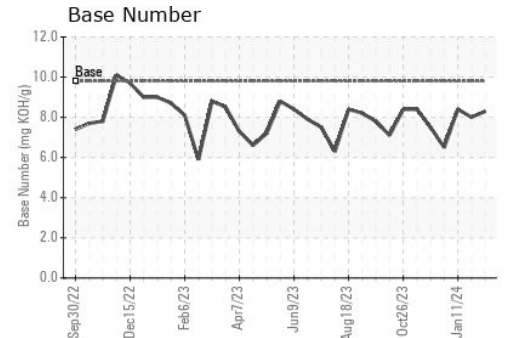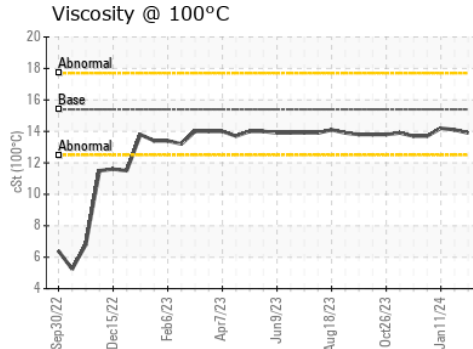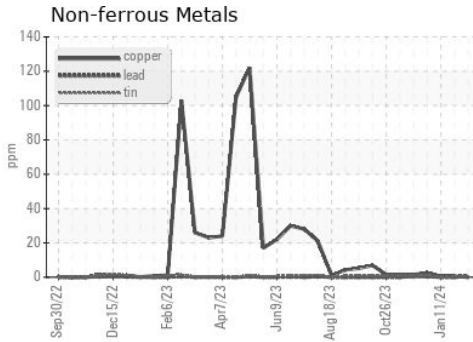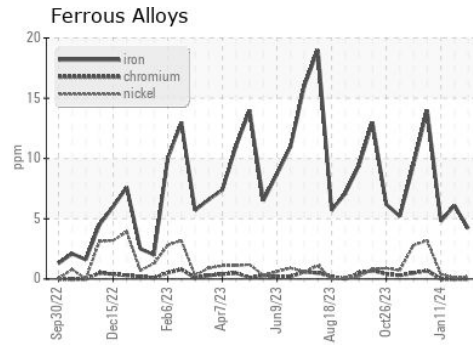

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0115583  
 Lab Number : 06116487  
 Unique Number : 10925320  
 Test Package : FLEET

GFL Environmental - 955 - Montgomery  
 1121 Wilbanks St  
 Montgomery, AL  
 US 36108  
 Contact: LISA REEVES

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: