




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**1109M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (9 GAL)**

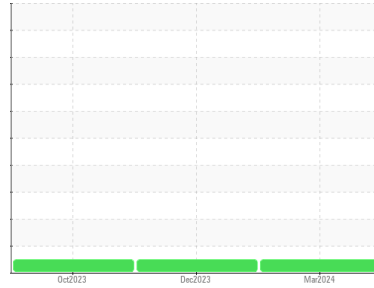

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0115021</b>	GFL0097738	GFL0087264
Sample Date	Client Info		<b>06 Mar 2024</b>	06 Dec 2023	01 Oct 2023
Machine Age	hrs	Client Info	<b>15477</b>	14891	14359
Oil Age	hrs	Client Info	<b>586</b>	532	700
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	<b>27</b>	10	15
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	4	6
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>30	<b>0</b>	6	8
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<b>4</b>	1	2
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>56</b>	60	54
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>904</b>	1004	872
Calcium	ppm	ASTM D5185m	1070	<b>978</b>	1134	1021
Phosphorus	ppm	ASTM D5185m	1150	<b>1042</b>	1141	927
Zinc	ppm	ASTM D5185m	1270	<b>1181</b>	1357	1226
Sulfur	ppm	ASTM D5185m	2060	<b>3489</b>	3193	2469

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>30	<b>11</b>	8	7
Sodium	ppm	ASTM D5185m		<b>1</b>	12	4
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	7

## INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.4	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>4.9</b>	6.4	7.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.5</b>	18.6	19.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.1</b>	14.1	14.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.7</b>	8.7	8.5







# OIL ANALYSIS REPORT

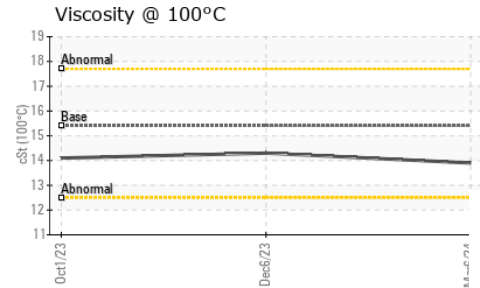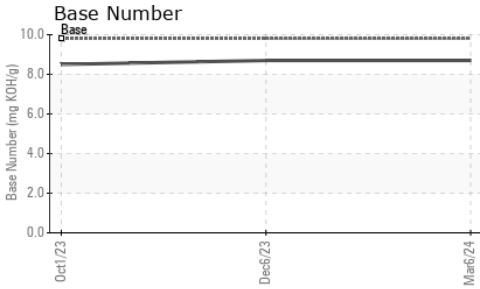

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	14.3

## GRAPHS

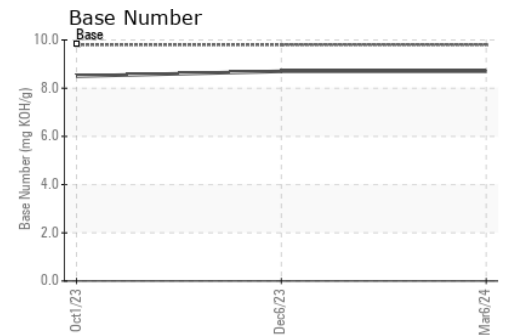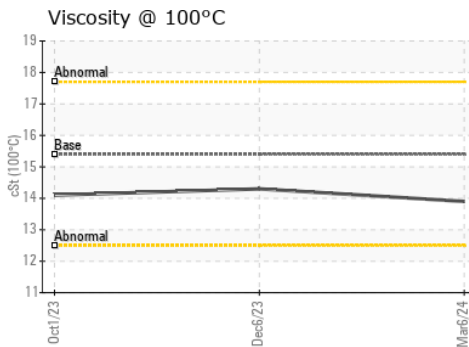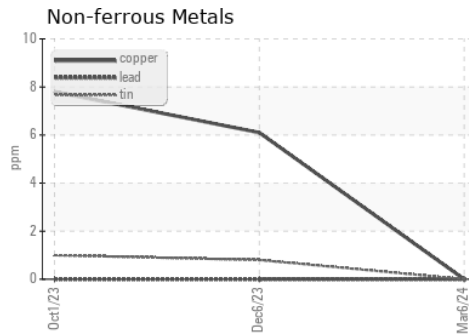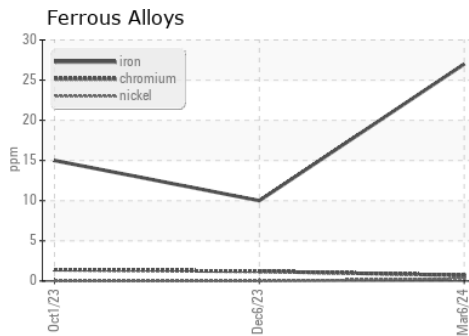

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0115021  
 Lab Number : 06116781  
 Unique Number : 10925614  
 Test Package : FLEET

Received : 13 Mar 2024  
 Tested : 14 Mar 2024  
 Diagnosed : 14 Mar 2024 - Wes Davis

GFL Environmental - 405 - Arbor Hills  
 7400 Napier Rd  
 NORTHVILLE, MI  
 US 48168

Contact: Anthony Hopkins  
 ahopkins@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: