




OIL ANALYSIS REPORT

Sample Rating Trend

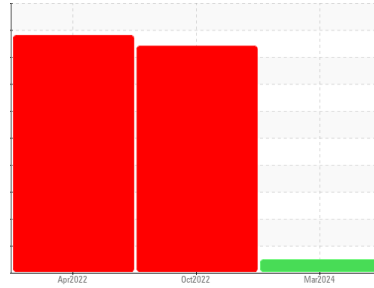

NORMAL



Machine Id
4536M

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (6 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: Resample)

Wear

All component wear rates are normal.

Contamination

No evidence of coolant present in the oil. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0115189	GFL0052068	GFL0018491
Sample Date	Client Info		10 Mar 2024	04 Oct 2022	06 Apr 2022
Machine Age	hrs	Client Info	4144	120446	120446
Oil Age	hrs	Client Info	0	120446	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	SEVERE	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	8	73	16
Chromium	ppm	ASTM D5185m >20	<1	2	1
Nickel	ppm	ASTM D5185m >2	<1	0	1
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	<1	0	1
Aluminum	ppm	ASTM D5185m >20	<1	2	<1
Lead	ppm	ASTM D5185m >40	0	<1	<1
Copper	ppm	ASTM D5185m >330	5	50	50
Tin	ppm	ASTM D5185m >15	<1	0	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	<1	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	104	129
Barium	ppm	ASTM D5185m 0	0	<1	0
Molybdenum	ppm	ASTM D5185m 60	58	68	97
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	914	480	947
Calcium	ppm	ASTM D5185m 1070	996	591	1061
Phosphorus	ppm	ASTM D5185m 1150	1015	583	1201
Zinc	ppm	ASTM D5185m 1270	1206	677	1256
Sulfur	ppm	ASTM D5185m 2060	3235	1885	2811

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	4	17	▲ 26
Sodium	ppm	ASTM D5185m	2	▲ 970	▲ 1167
Potassium	ppm	ASTM D5185m >20	0	▲ 70	35
Glycol	%	*ASTM D2982	NEG	▲ 0.10	▲ 0.10

INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	0.5	0.9	0.1
Nitration	Abs/cm	*ASTM D7624 >20	7.7	11.1	7.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.3	16.7	19.7

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	15.3	15.0	13.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	7.4	40.6	15.4







OIL ANALYSIS REPORT

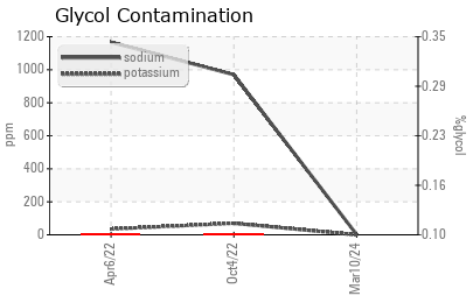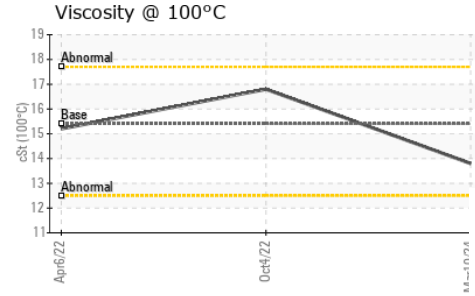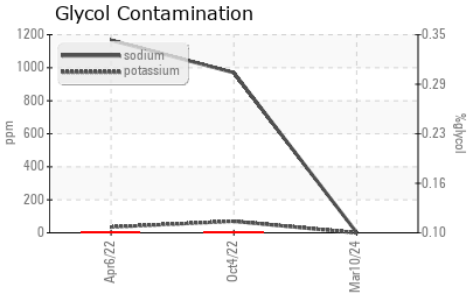

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	16.8

GRAPHS

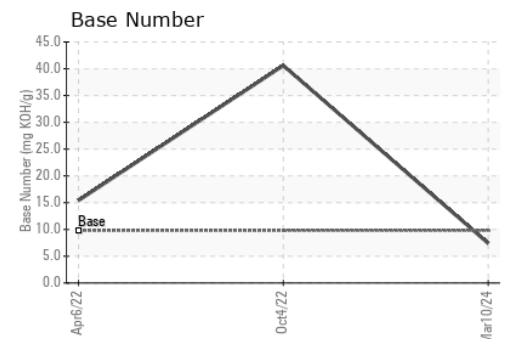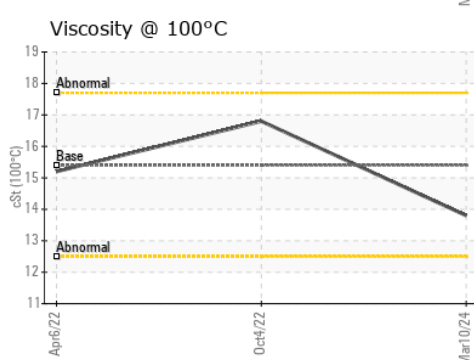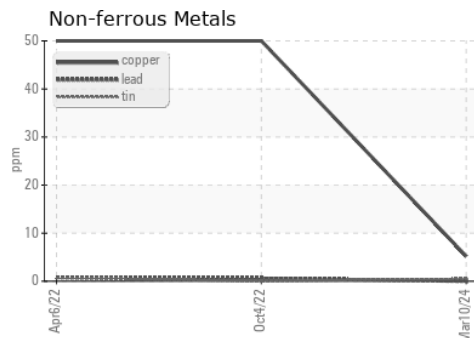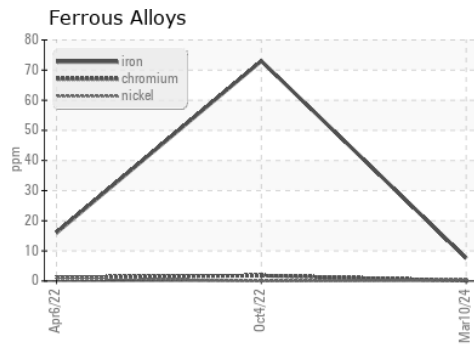

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0115189 **Received** : 13 Mar 2024
Lab Number : **06116788** **Tested** : 14 Mar 2024
Unique Number : 10925621 **Diagnosed** : 14 Mar 2024 - Jonathan Hester
Test Package : FLEET

GFL Environmental - 405 - Arbor Hills
 7400 Napier Rd
 NORTHVILLE, MI
 US 48168
 Contact: Anthony Hopkins
 ahopkins@gflenv.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)