



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**834004**

Component  
**Transmission (Auto)**

Fluid  
**PETRO CANADA DuraDrive HD Synthetic 668 (28 QTS)**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0106782</b>	---	---
Sample Date	Client Info		<b>11 Mar 2024</b>	---	---
Machine Age	hrs	Client Info	<b>2347</b>	---	---
Oil Age	hrs	Client Info	<b>17288</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>325	<b>77</b>	---
Chromium	ppm	ASTM D5185m	>2	<b>0</b>	---
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	---
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	---
Silver	ppm	ASTM D5185m	>5	<b>0</b>	---
Aluminum	ppm	ASTM D5185m	>75	<b>14</b>	---
Lead	ppm	ASTM D5185m	>40	<b>5</b>	---
Copper	ppm	ASTM D5185m	>50	<b>8</b>	---
Tin	ppm	ASTM D5185m	>10	<b>1</b>	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>84</b>	---
Barium	ppm	ASTM D5185m		<b>0</b>	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---
Manganese	ppm	ASTM D5185m		<b>2</b>	---
Magnesium	ppm	ASTM D5185m		<b>0</b>	---
Calcium	ppm	ASTM D5185m		<b>53</b>	---
Phosphorus	ppm	ASTM D5185m		<b>259</b>	---
Zinc	ppm	ASTM D5185m		<b>0</b>	---
Sulfur	ppm	ASTM D5185m		<b>1347</b>	---

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>5</b>	---
Sodium	ppm	ASTM D5185m		<b>5</b>	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---
Silt	scalar	*Visual	NONE	<b>LIGHT</b>	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---
Free Water	scalar	*Visual		<b>NEG</b>	---



# OIL ANALYSIS REPORT

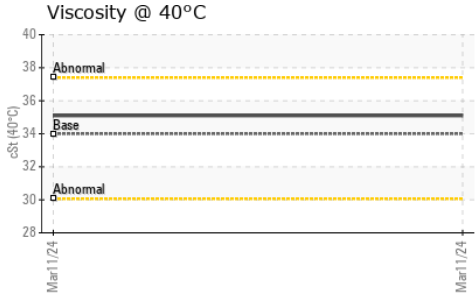




### FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 34	<b>35.1</b>	---	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

### GRAPHS

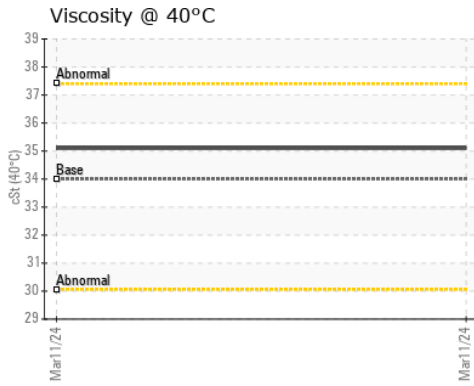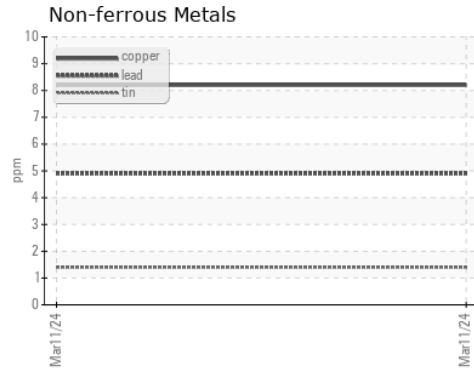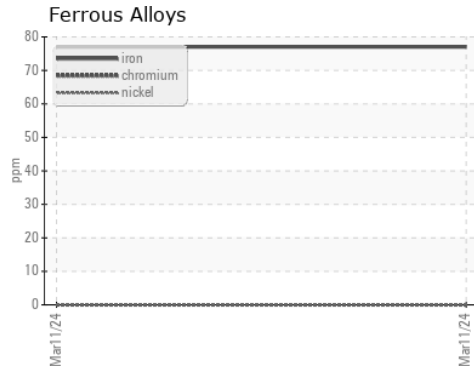

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0106782      **Received** : 13 Mar 2024  
**Lab Number** : 06117484      **Tested** : 14 Mar 2024  
**Unique Number** : 10926317      **Diagnosed** : 14 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 856 - Houston South**  
 8515 Highway 6 South  
 Houston, TX  
 US 77083  
 Contact: Apolinar Zacarias  
 pzacariascano@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: