




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

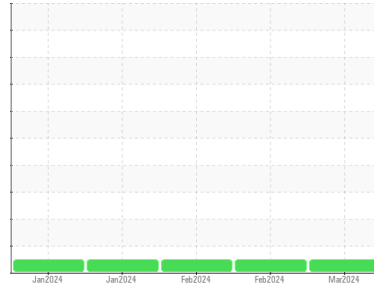

Machine Id
834090
 Component
Natural Gas Engine
 Fluid
NOT GIVEN (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL011884	GFL0108304	GFL0108269
Sample Date	Client Info	11 Mar 2024	19 Feb 2024	06 Feb 2024
Machine Age	hrs	756	599	503
Oil Age	hrs	756	599	503
Oil Changed	Client Info	Not Changed	Not Changed	Not Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	55	57	81
Chromium	ppm	ASTM D5185m	>4	2	2	3
Nickel	ppm	ASTM D5185m	>2	1	2	4
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>9	40	36	48
Lead	ppm	ASTM D5185m	>30	1	1	2
Copper	ppm	ASTM D5185m	>35	15	14	22
Tin	ppm	ASTM D5185m	>4	1	1	2
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m		11	15	17
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m		57	60	68
Manganese	ppm	ASTM D5185m		12	12	17
Magnesium	ppm	ASTM D5185m		705	758	850
Calcium	ppm	ASTM D5185m		1230	1304	1319
Phosphorus	ppm	ASTM D5185m		665	713	763
Zinc	ppm	ASTM D5185m		867	978	1007
Sulfur	ppm	ASTM D5185m		2514	2388	2559

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>+100	26	27	40
Sodium	ppm	ASTM D5185m		6	6	3
Potassium	ppm	ASTM D5185m	>20	140	115	160

INFRA-RED




method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844		0	0.1	0
Nitration	Abs/cm	*ASTM D7624	>20	12.1	11.5	12.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.0	22.5	23.0

FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.6	19.6	20.3
Base Number (BN)	mg KOH/g	ASTM D2896		3.1	4.3	3.7







OIL ANALYSIS REPORT

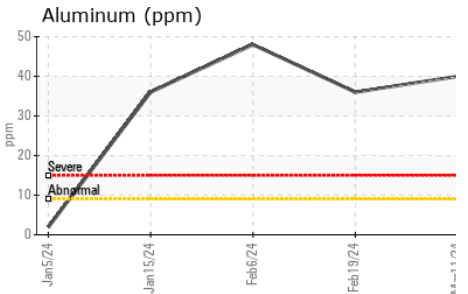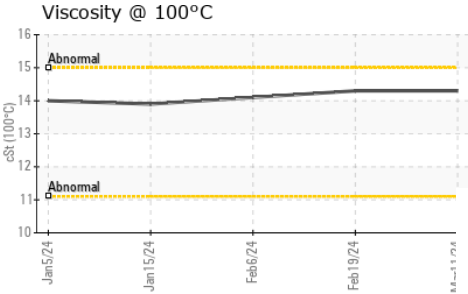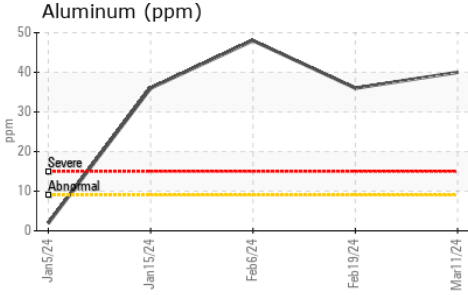

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.3	14.3	14.1

GRAPHS

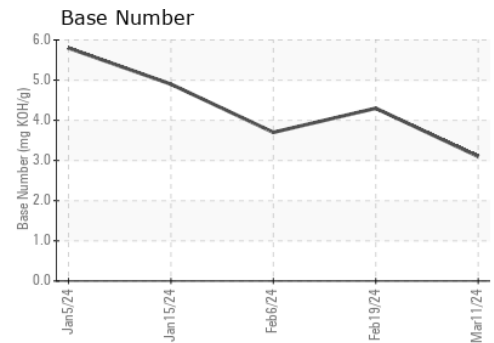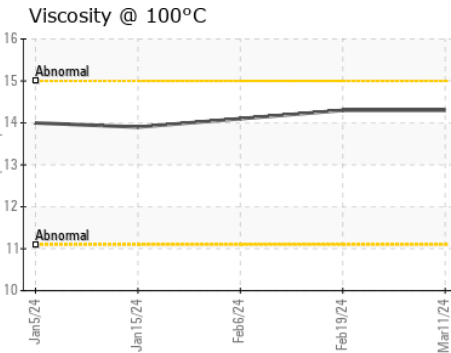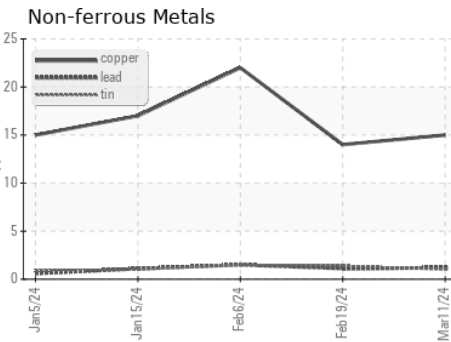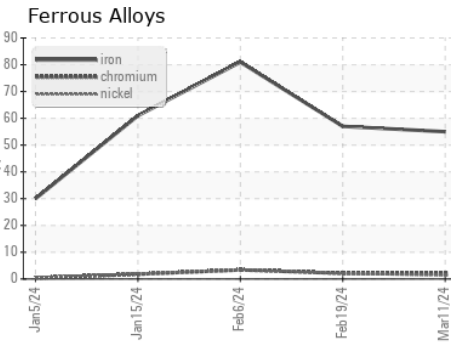

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0111884
Lab Number : 06117673
Unique Number : 10926506
Test Package : FLEET

Received : 13 Mar 2024
Tested : 14 Mar 2024
Diagnosed : 14 Mar 2024 - Wes Davis

GFL Environmental - 652 - Fredericksburg Hauling
 10954 Houser Drive
 Fredericksburg, VA
 US 22408
 Contact: WILLIAM MILO
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: