




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

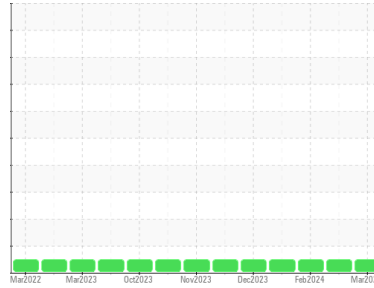

Machine Id  
**921046-260380**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0114106</b>	GFL0108063	GFL0108031
Sample Date	Client Info		<b>01 Mar 2024</b>	22 Feb 2024	15 Feb 2024
Machine Age	hrs	Client Info	<b>67041</b>	7598	7553
Oil Age	hrs	Client Info	<b>0</b>	1706	5892
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>3</b>	19	17
Chromium	ppm	ASTM D5185m >20	<b>0</b>	1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	4	4
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>3</b>	2	<1
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>56</b>	64	59
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>946</b>	992	1112
Calcium	ppm	ASTM D5185m 1070	<b>1053</b>	1122	1198
Phosphorus	ppm	ASTM D5185m 1150	<b>1058</b>	1126	1160
Zinc	ppm	ASTM D5185m 1270	<b>1267</b>	1342	1449
Sulfur	ppm	ASTM D5185m 2060	<b>3598</b>	3248	3578

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	3	3
Sodium	ppm	ASTM D5185m	<b>1</b>	4	3
Potassium	ppm	ASTM D5185m >20	<b>1</b>	6	5

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	1.2	1.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>4.7</b>	7.8	7.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.5</b>	20.3	19.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.1</b>	14.5	14.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.1</b>	8.2	8.4







# OIL ANALYSIS REPORT

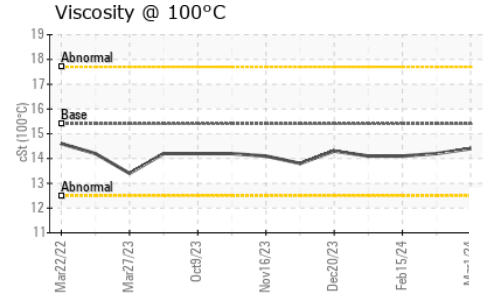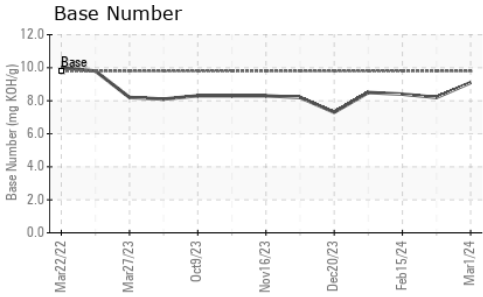

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.4</b>	14.2	14.1

## GRAPHS

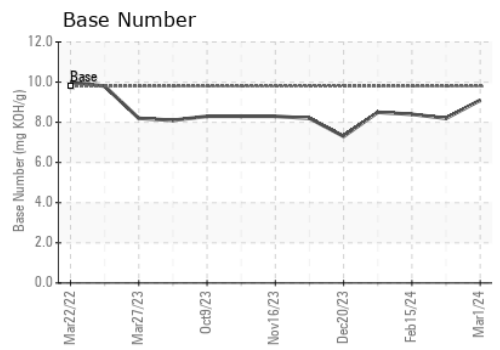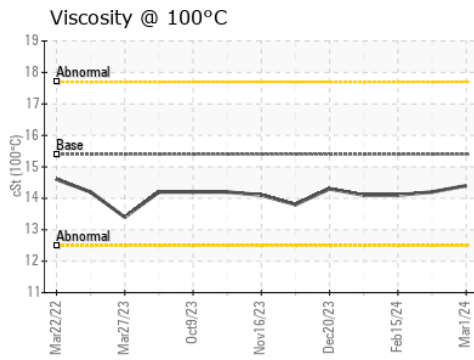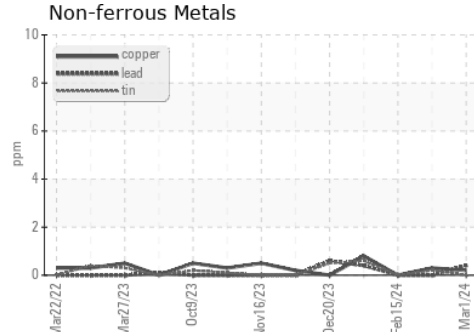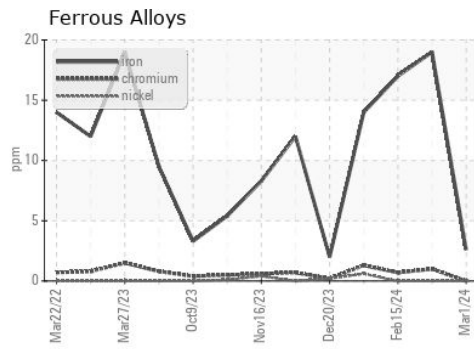

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0114106  
**Lab Number** : 06117679  
**Unique Number** : 10926512  
**Test Package** : FLEET  
**Received** : 13 Mar 2024  
**Tested** : 14 Mar 2024  
**Diagnosed** : 14 Mar 2024 - Wes Davis

**GFL Environmental - 837 - Harrison TS**  
 22820 S State Route 291  
 Harrisonville, MO  
 US 64701  
 Contact: JOHNNY PEREZ  
 johnny.perez@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)