




OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



Machine Id
934024
 Component
Natural Gas Engine
 Fluid
PETRO CANADA DURON GEO LD 15W40 (--- GAL)

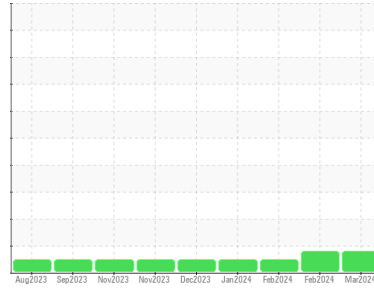

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0114020	GFL0109795	GFL0109812
Sample Date	Client Info		12 Mar 2024	27 Feb 2024	01 Feb 2024
Machine Age	hrs	Client Info	1188	1099	964
Oil Age	hrs	Client Info	1188	0	0
Oil Changed	Client Info		Changed	Not Changd	Not Changd
Sample Status			ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	▲ 53	▲ 54	14
Chromium	ppm	ASTM D5185m >5	2	2	<1
Nickel	ppm	ASTM D5185m >4	<1	2	0
Titanium	ppm	ASTM D5185m >5	0	0	0
Silver	ppm	ASTM D5185m >3	<1	0	0
Aluminum	ppm	ASTM D5185m >25	7	6	3
Lead	ppm	ASTM D5185m >40	1	3	11
Copper	ppm	ASTM D5185m >150	11	10	2
Tin	ppm	ASTM D5185m >4	2	2	1
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	8	12	8
Barium	ppm	ASTM D5185m 5	0	0	0
Molybdenum	ppm	ASTM D5185m 50	61	61	57
Manganese	ppm	ASTM D5185m 0	10	10	<1
Magnesium	ppm	ASTM D5185m 560	721	895	642
Calcium	ppm	ASTM D5185m 1510	1593	1933	1775
Phosphorus	ppm	ASTM D5185m 780	800	920	833
Zinc	ppm	ASTM D5185m 870	1035	1290	1061
Sulfur	ppm	ASTM D5185m 2040	2647	2929	2607

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	18	19	5
Sodium	ppm	ASTM D5185m	5	4	12
Potassium	ppm	ASTM D5185m >20	6	6	<1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0.1	0.1	0
Nitration	Abs/cm	*ASTM D7624 >20	13.0	12.7	12.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	25.5	23.7	27.0


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	21.7	20.4	22.5
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	3.2	6.6	3.1




OIL ANALYSIS REPORT


▲ Ferrous Alloys

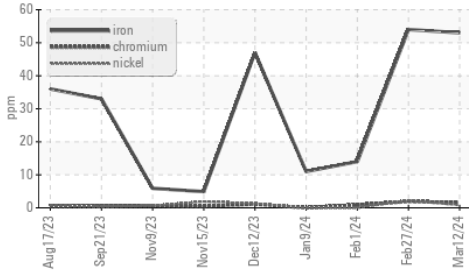

Base Number

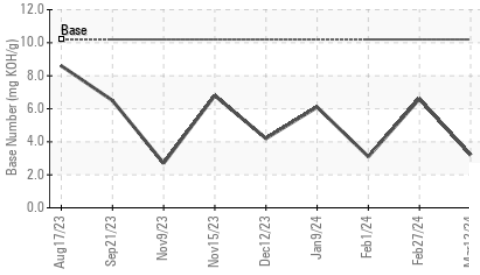

Viscosity @ 100°C

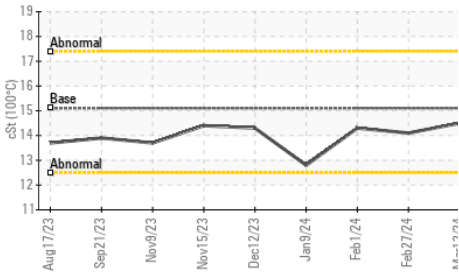


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.5	14.1

GRAPHS


▲ Ferrous Alloys

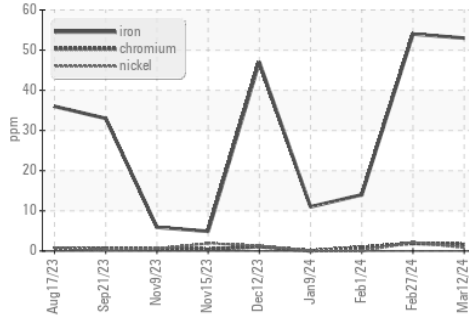


Non-ferrous Metals

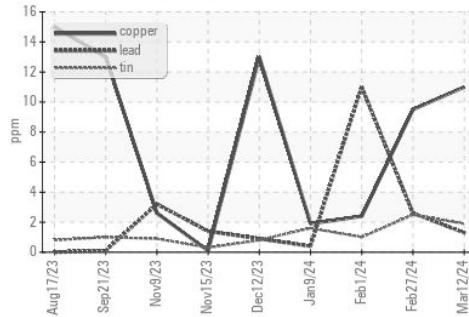

Viscosity @ 100°C

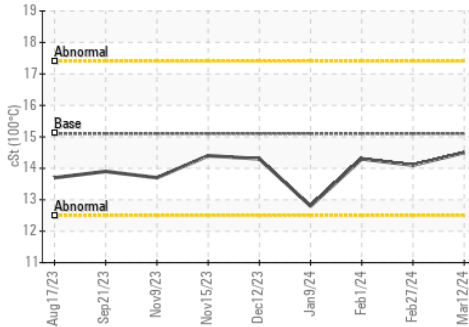

Base Number

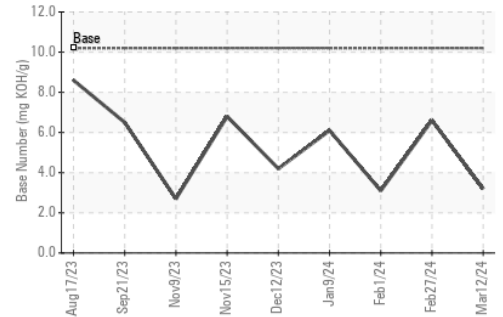

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0114020
Lab Number : 06118170
Unique Number : 10927003
Test Package : FLEET
Received : 14 Mar 2024
Tested : 15 Mar 2024
Diagnosed : 15 Mar 2024 - Don Baldrige

GFL Environmental - 836 - Kansas City Hauling
 7801 East Truman Road
 Kansas City, MO
 US 64126
 Contact: Loyce Stewart
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: