




OIL ANALYSIS REPORT

Sample Rating Trend

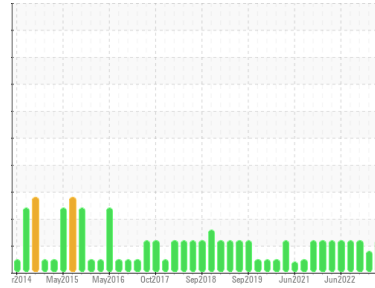

FUEL



Area
N.E.R./Off-Road
 Machine Id
TG18
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0109928	PCA0083229	PCA0071962
Sample Date	Client Info	12 Mar 2024	02 May 2023	16 Jan 2023
Machine Age	hrs	14079	13822	13577
Oil Age	hrs	12521	12509	12515
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	MARGINAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>100	18	21	16
Chromium	ppm	ASTM D5185m	>20	<1	1	<1
Nickel	ppm	ASTM D5185m	>4	1	2	1
Titanium	ppm	ASTM D5185m		1	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	0	<1
Lead	ppm	ASTM D5185m	>40	2	2	2
Copper	ppm	ASTM D5185m	>330	2	1	1
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	2	2	5
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	55	62	55
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	1010	831	1010	896
Calcium	ppm	ASTM D5185m	1070	998	1123	1041
Phosphorus	ppm	ASTM D5185m	1150	930	1049	956
Zinc	ppm	ASTM D5185m	1270	1107	1327	1198
Sulfur	ppm	ASTM D5185m	2060	2937	2918	3344

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	3	4	2
Sodium	ppm	ASTM D5185m		0	3	1
Potassium	ppm	ASTM D5185m	>20	1	<1	<1
Fuel	%	ASTM D3524	>5	▲ 7.0	▲ 4.9	▲ 4.5

INFRA-RED


method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	0.3	0.6	0.2
Nitration	Abs/cm	*ASTM D7624	>20	6.6	8.7	6.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.2	18.7	18.2

FLUID DEGRADATION


method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.6	15.9	14.0
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	9.12	9.49	8.62

OIL ANALYSIS REPORT


▲ Fuel Dilution

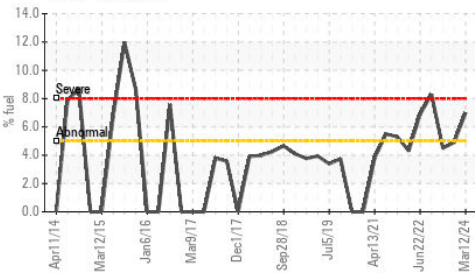

▲ Viscosity @ 100°C

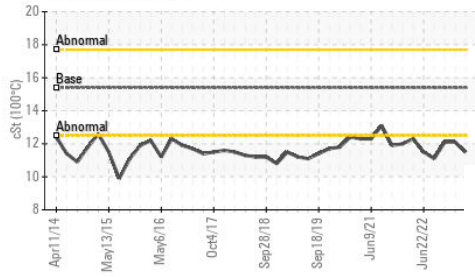









Base Number

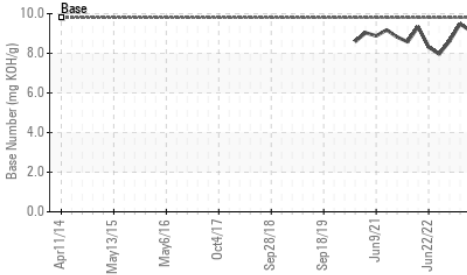

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 11.5	12.1	▲ 12.1

GRAPHS

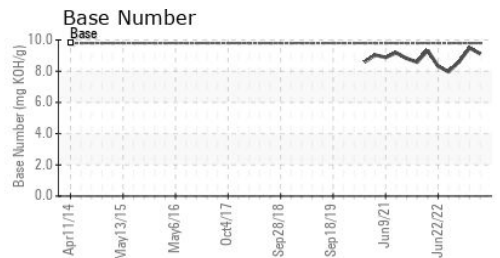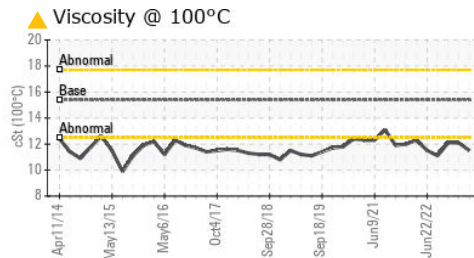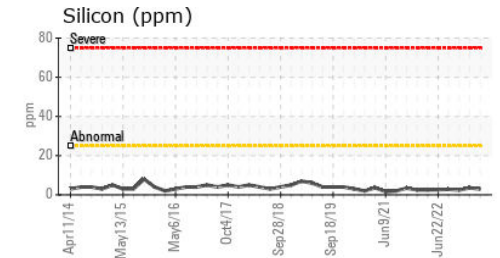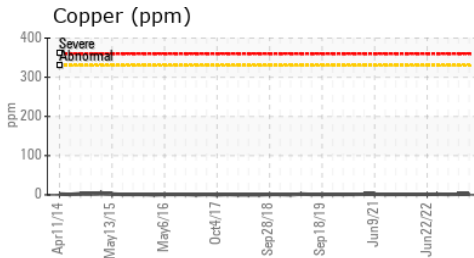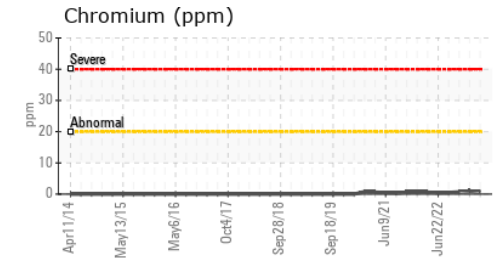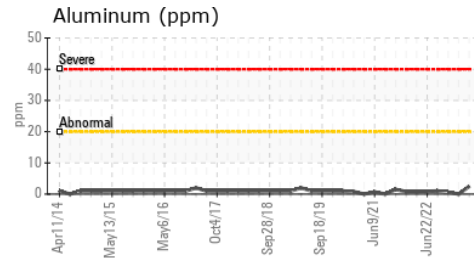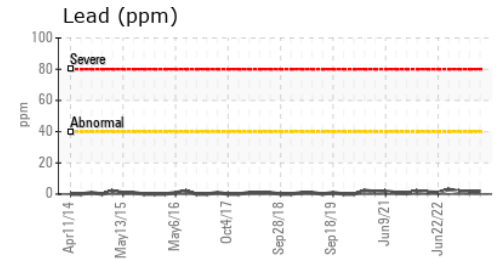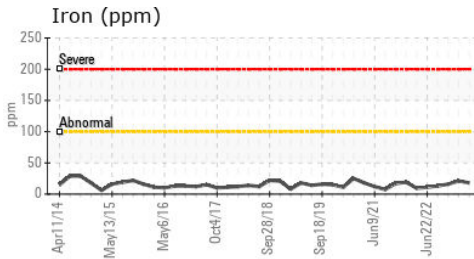

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0109928 **Received** : 14 Mar 2024
Lab Number : **06118474** **Tested** : 18 Mar 2024
Unique Number : 10927307 **Diagnosed** : 18 Mar 2024 - Wes Davis
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

G LOPES CONSTRUCTION
 565 WINTHROP ST
 TAUNTON, MA
 US 02780
 Contact: BUTCH MCGRATH
 bm McGrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: