


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

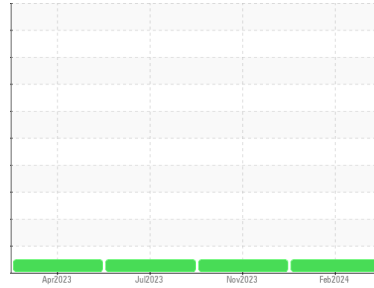

Machine Id  
**2126970**

Component  
**Front Differential**

Fluid  
**PETRO CANADA TRAXON SYNTHETIC 75W90 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0117953</b>	PCA0110942	PCA0102159
Sample Date	Client Info		<b>16 Feb 2024</b>	06 Nov 2023	26 Jul 2023
Machine Age	mls	Client Info	<b>22233</b>	0	40486
Oil Age	mls	Client Info	<b>0</b>	61458	40486
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	<b>258</b>	251	235
Chromium	ppm	ASTM D5185m >10	<b>3</b>	3	4
Nickel	ppm	ASTM D5185m >10	<b>5</b>	6	5
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	1	1
Lead	ppm	ASTM D5185m >25	<b>8</b>	9	8
Copper	ppm	ASTM D5185m >100	<b>25</b>	23	22
Tin	ppm	ASTM D5185m >10	<b>1</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 328	<b>116</b>	134	152
Barium	ppm	ASTM D5185m 1	<b>0</b>	3	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m	<b>12</b>	12	13
Magnesium	ppm	ASTM D5185m 1	<b>0</b>	0	0
Calcium	ppm	ASTM D5185m 7	<b>52</b>	13	13
Phosphorus	ppm	ASTM D5185m 1145	<b>1039</b>	1085	1090
Zinc	ppm	ASTM D5185m 3	<b>19</b>	12	22
Sulfur	ppm	ASTM D5185m 17909	<b>26217</b>	23624	26176


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	<b>56</b>	58	52
Sodium	ppm	ASTM D5185m	<b>8</b>	9	9
Potassium	ppm	ASTM D5185m >20	<b>1</b>	0	3

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	LIGHT	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT

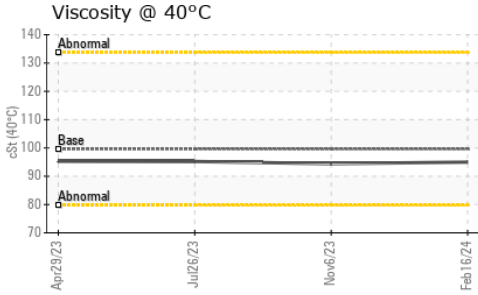




### FLUID PROPERTIES

	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	99.6	<b>95.0</b>	94.4	95.2

### SAMPLE IMAGES

	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

### GRAPHS

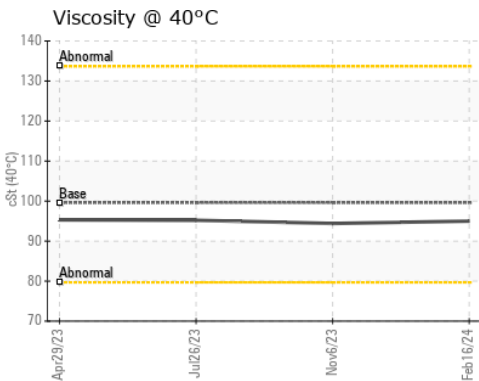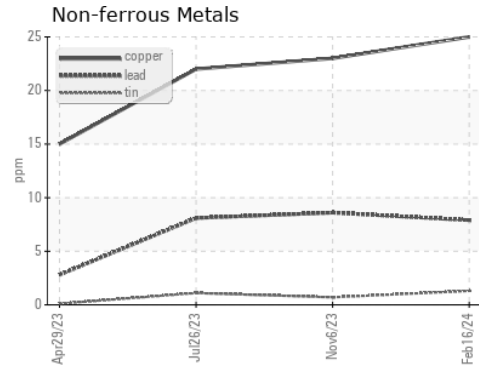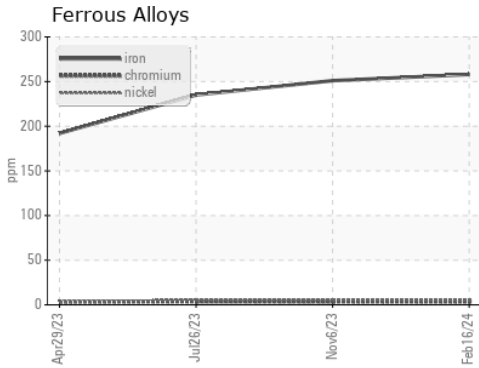

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0117953  
**Lab Number** : 06118624  
**Unique Number** : 10927457  
**Test Package** : FLEET

**PERDUE FARMS - GEORGETOWN**  
 20621 SAVANAH RD  
 GEORGETOWN, DE  
 US 19947  
 Contact: ROBERT LOCKWOOD  
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: