


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

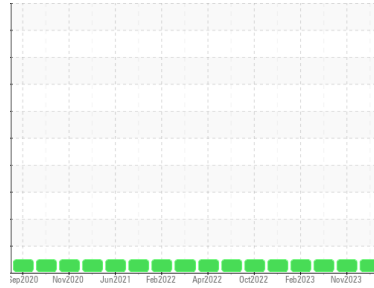

Machine Id  
**2026861**  
 Component  
**Rear Differential**  
 Fluid  
**GEAR OIL SAE 75W90 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0117955</b>	PCA0112385	PCA0104345
Sample Date	Client Info			<b>12 Feb 2024</b>	12 Nov 2023	21 Aug 2023
Machine Age	mls Client Info			<b>369661</b>	349248	328089
Oil Age	mls Client Info			<b>369661</b>	349248	328089
Oil Changed	Client Info			<b>Not Changed</b>	Not Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	<b>NEG</b>	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>192</b>	174	179
Chromium	ppm	ASTM D5185m	>10	<b>1</b>	1	2
Nickel	ppm	ASTM D5185m	>10	<b>7</b>	8	7
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>100	<b>4</b>	2	6
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	<b>262</b>	278	264
Barium	ppm	ASTM D5185m	200	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	12	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>11</b>	10	10
Magnesium	ppm	ASTM D5185m	12	<b>0</b>	0	0
Calcium	ppm	ASTM D5185m	150	<b>0</b>	0	0
Phosphorus	ppm	ASTM D5185m	1650	<b>1349</b>	1188	1315
Zinc	ppm	ASTM D5185m	125	<b>0</b>	2	0
Sulfur	ppm	ASTM D5185m	22500	<b>24747</b>	22504	23518

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	<b>25</b>	23	24
Sodium	ppm	ASTM D5185m		<b>6</b>	6	6
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	3	0

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	LIGHT
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT

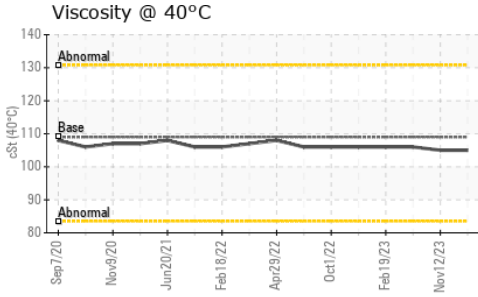




### FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D445	109	<b>105</b>	105	106

### SAMPLE IMAGES

method	limit/base	current	history1	history2	
Color			no image	no image	no image
Bottom			no image	no image	no image

### GRAPHS

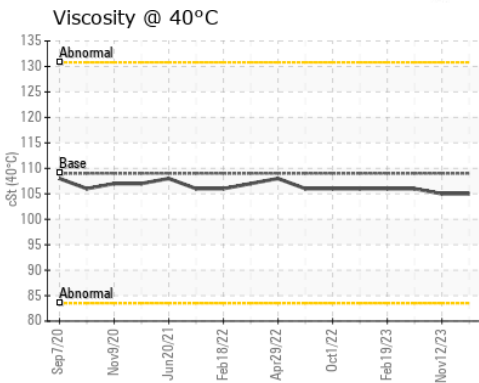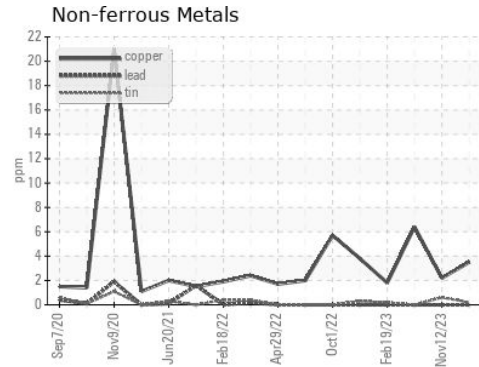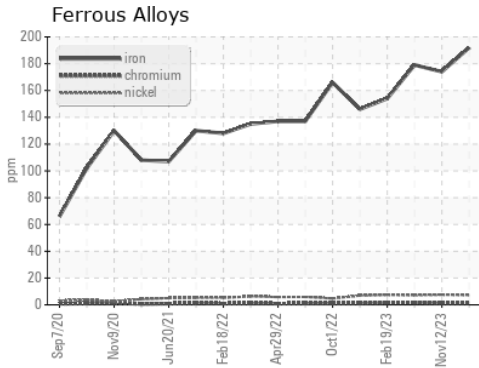

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0117955      **Received** : 14 Mar 2024  
**Lab Number** : 06118626      **Tested** : 15 Mar 2024  
**Unique Number** : 10927459      **Diagnosed** : 15 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**PERDUE FARMS - GEORGETOWN**  
 20621 SAVANAH RD  
 GEORGETOWN, DE  
 US 19947  
 Contact: ROBERT LOCKWOOD  
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: