


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

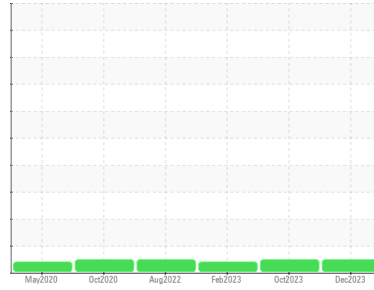

Machine Id
1926725
 Component
Front Differential
 Fluid
GEAR OIL SAE 75W90 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0115454	PCA0107396	PCA0091941
Sample Date	Client Info			31 Dec 2023	04 Oct 2023	10 Feb 2023
Machine Age	mls	Client Info		362350	0	281067
Oil Age	mls	Client Info		362350	342475	281067
Oil Changed	Client Info			Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	201	192	217
Chromium	ppm	ASTM D5185m	>10	1	1	2
Nickel	ppm	ASTM D5185m	>10	2	3	4
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	2	3
Lead	ppm	ASTM D5185m	>25	<1	1	2
Copper	ppm	ASTM D5185m	>100	33	32	42
Tin	ppm	ASTM D5185m	>10	1	2	2
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	240	247	258
Barium	ppm	ASTM D5185m	200	0	0	0
Molybdenum	ppm	ASTM D5185m	12	0	0	<1
Manganese	ppm	ASTM D5185m		8	7	9
Magnesium	ppm	ASTM D5185m	12	0	0	2
Calcium	ppm	ASTM D5185m	150	0	0	12
Phosphorus	ppm	ASTM D5185m	1650	1344	1220	1299
Zinc	ppm	ASTM D5185m	125	0	1	19
Sulfur	ppm	ASTM D5185m	22500	24494	22553	21551

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	25	25	21
Sodium	ppm	ASTM D5185m		7	6	9
Potassium	ppm	ASTM D5185m	>20	0	<1	1

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG



OIL ANALYSIS REPORT

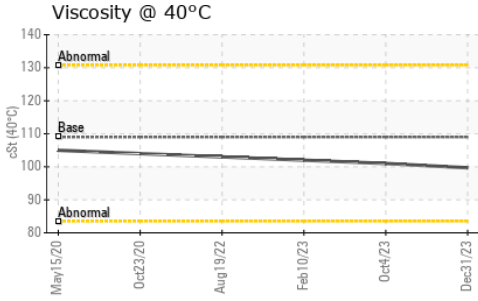




FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 109	99.7	101	102

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

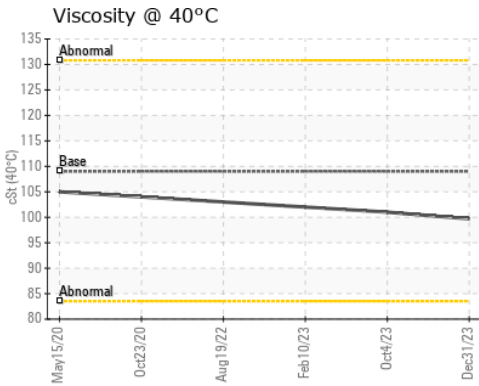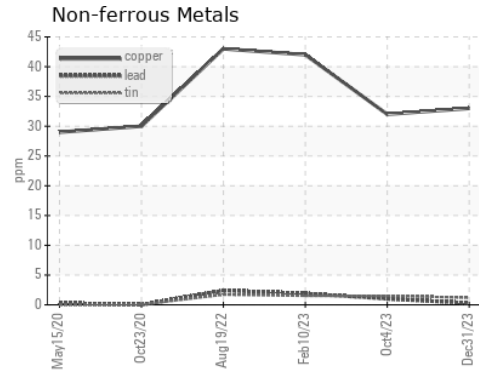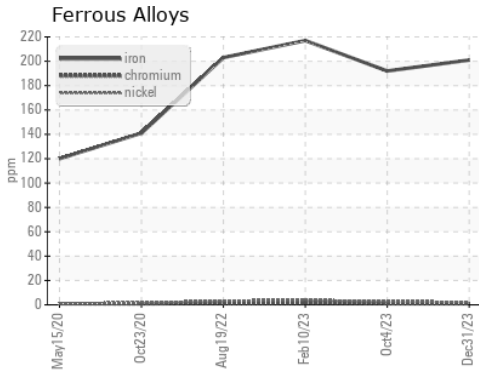

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0115454 **Received** : 14 Mar 2024
Lab Number : **06118663** **Tested** : 15 Mar 2024
Unique Number : 10927496 **Diagnosed** : 15 Mar 2024 - Wes Davis
Test Package : FLEET

PERDUE FARMS - GEORGETOWN
 20621 SAVANAH RD
 GEORGETOWN, DE
 US 19947
 Contact: ROBERT LOCKWOOD
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: