




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

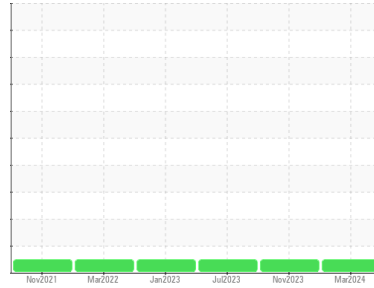

Machine Id  
**123018-816**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 XLE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0110967</b>	GFL0096115	GFL0084532
Sample Date	Client Info		<b>11 Mar 2024</b>	22 Nov 2023	10 Jul 2023
Machine Age	hrs	Client Info	<b>13915</b>	13315	12718
Oil Age	hrs	Client Info	<b>748</b>	600	600
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>12</b>	22	20
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	2
Titanium	ppm	ASTM D5185m	<b>13</b>	10	14
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	5	5
Lead	ppm	ASTM D5185m >40	<b>9</b>	14	15
Copper	ppm	ASTM D5185m >330	<b>2</b>	29	6
Tin	ppm	ASTM D5185m >15	<b>2</b>	2	1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>50</b>	68	55
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>41</b>	65	47
Manganese	ppm	ASTM D5185m	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>755</b>	699	681
Calcium	ppm	ASTM D5185m	<b>1651</b>	1590	1717
Phosphorus	ppm	ASTM D5185m 760	<b>786</b>	785	717
Zinc	ppm	ASTM D5185m 830	<b>917</b>	895	825
Sulfur	ppm	ASTM D5185m 2770	<b>3889</b>	2947	3562

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	15	8
Sodium	ppm	ASTM D5185m	<b>3</b>	4	0
Potassium	ppm	ASTM D5185m >20	<b>6</b>	6	6

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	1.2	0.8
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.1</b>	12.8	12.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.7</b>	24.8	23.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.4</b>	21.1	20.4
Base Number (BN)	mg KOH/g	ASTM D2896 10.7	<b>5.8</b>	8.1	8.1







# OIL ANALYSIS REPORT

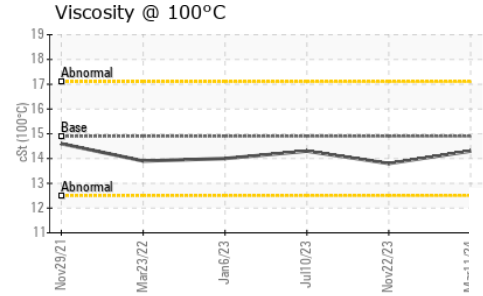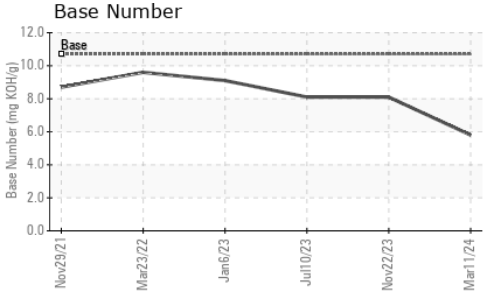

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.9	<b>14.3</b>	13.8	14.3

## GRAPHS

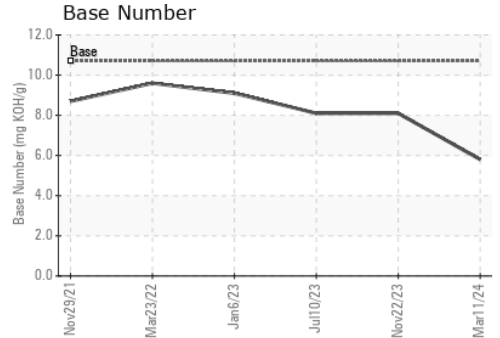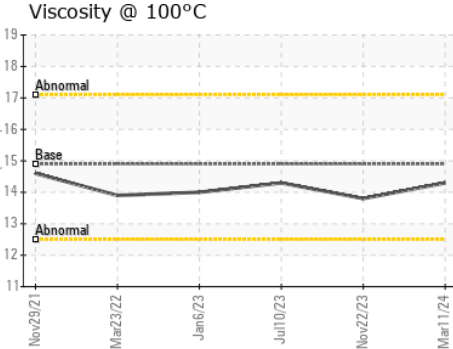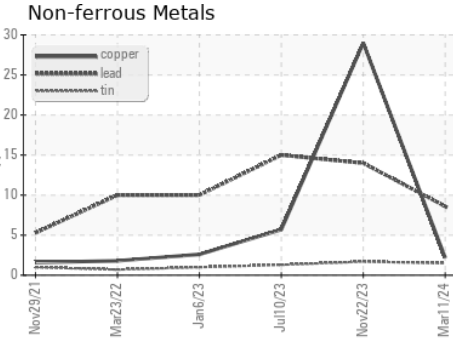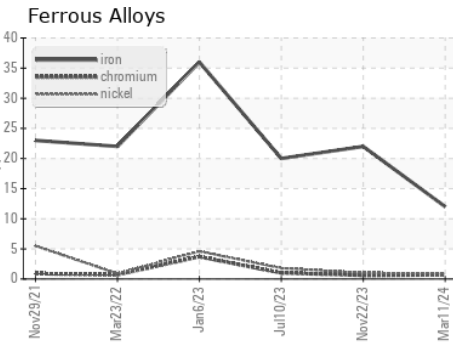

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0110967  
**Lab Number** : 06118850  
**Unique Number** : 10927683  
**Test Package** : FLEET  
**Received** : 14 Mar 2024  
**Tested** : 15 Mar 2024  
**Diagnosed** : 18 Mar 2024 - Sean Felton

**GFL Environmental - 629 - Northern A1**  
 3947 US 131 N  
 Kalkaska, MI  
 US 49646-8428  
**Contact: MITCH HERSHBERGER**

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (231)624-0848

F: